




- Endurance: 105°C, 2000 hours
- Recommended Applications: Suitable for AV(TV,Video,Audio),Monitor/Computer, Home appliance, OA/HA/Communication,Industrial, Automobile, Meter.
- Corresponding product to RoHS


Specifications

Item	Characteristics																													
Category Temperature Range	-55 ~ +105°C	-25 ~ +105°C																												
Rated Voltage Range	6.3 ~ 100VDC	160~450VDV																												
Rated Capacitance Range	1~ 2200 μF																													
Capacitance Tolerance	± 20 % (120Hz, 20°C)																													
Leakage Current (20°C)	4~10Φ	12.5																												
	I ≤ 0.01CV or 3(μA), whichever is greater. I ≤ 0.01CV or 3(μA), whichever is greater.																													
	(After rated voltage applied for 2 minutes)																													
		I ≤ 0.04CV+100 uA (After rated voltage applied for 2 minutes)																												
I= Leakage Current (μA) C= Nominal Capacitance (μF) V= Rated Voltage (V)																														
Dissipation Factor(MAX) (tan δ) (120Hz, 20°C)	Shown in the table of standard ratings																													
Low Temperature Stability Impedance Ratio (MAX)	<table border="1"> <thead> <tr> <th>WV</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35~100</th> <th>160~450</th> </tr> </thead> <tbody> <tr> <td>Z(120HZ)</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Z(-25°C) / Z(20°C)</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>4</td> </tr> <tr> <td>Z(-40°C) / Z(20°C)</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>—</td> </tr> </tbody> </table>		WV	6.3	10	16	25	35~100	160~450	Z(120HZ)							Z(-25°C) / Z(20°C)	4	3	2	2	2	4	Z(-40°C) / Z(20°C)	8	6	4	4	3	—
	WV	6.3	10	16	25	35~100	160~450																							
	Z(120HZ)																													
Z(-25°C) / Z(20°C)	4	3	2	2	2	4																								
Z(-40°C) / Z(20°C)	8	6	4	4	3	—																								
After applying rated voltage for 2000hrs at 105°C, Stay back to 20 °C temperature measurement, the capacitors shall meet the following requirements.																														
Endurance	Case (Φ)	4~6.3 Φ																												
	Capacitance Change	Within ±25% of the initial value																												
	Dissipation Factor	Not more than 200% of the specified value																												
	Leakage Current	Not more than the specified value																												
Shelf Life	After placed at 105°C without voltage applied for 1000 hours, Stay back to 20 °C temperature measurement, the capacitor shall meet the same requirement as Endurance.																													

MARKING

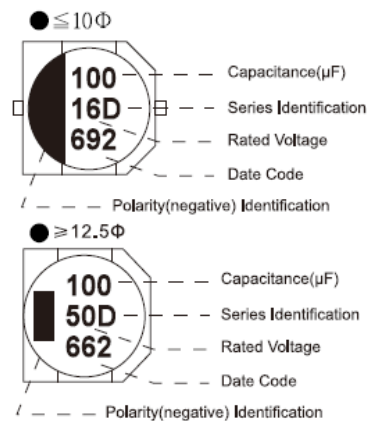

Dimensions [mm]

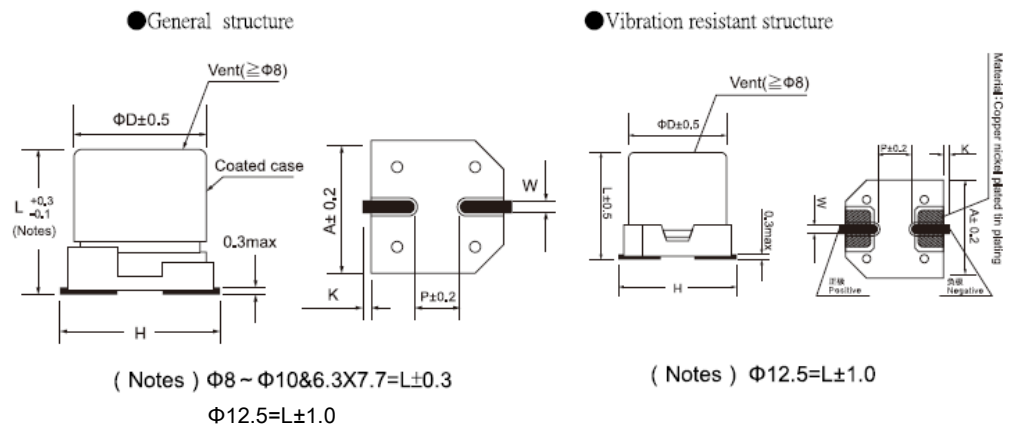

Dimensions	ΦD	L	A	H	W	P	K
B01	4.0	5.4	4.3	5.5 Max	0.65±0.1	1.0	0.35+0.15/-0.2
C01	5.0	5.4	5.3	6.5 Max	0.65±0.1	1.5	0.35+0.15/-0.2
E01	6.3	5.4	6.6	7.8 Max	0.65±0.1	1.8	0.35+0.15/-0.2
E04	6.3	7.7	6.6	7.8 Max	0.65±0.1	1.8	0.35+0.15/-0.2
G02	8.0	6.2	8.3	9.5 Max	0.65±0.1	2.2	0.35+0.15/-0.2
G03	8.0	10.2	8.3	10.0 Max	0.90±0.2	3.1	0.70±0.20
H03	10.0	10.2	10.3	12.0 Max	0.90±0.2	4.6	0.70±0.20
K05	12.5	13.5	10.3	15.0 Max	1.20±0.2	4.4	0.70±0.30
K06	12.5	16	10.3	15.0 Max	1.20±0.2	4.4	0.70±0.30
M06	16.0	16.5	10.3	19.0 Max	1.20±0.2	6.4	0.70±0.30

Multiplier for Ripple Current

Frequency (Hz)	60	120	1K	10K
Coefficient	0.85	1.00	1.15	1.25

■ **STANDARD RATINGS**

Rated Voltage (Surge Voltage) (V)	Cap (μF)	Case size Φ D x L (mm)	tan δ	Ripple current (mA/rms 105°C) (120Hz)	Rated Voltage (Surge Voltage) (V)	Cap (μF)	Case size Φ D x L (mm)	tan δ	Ripple current (mA/rms 105°C) (120Hz)	
6.3(8)	22	4x5.4	0.30	26	25(32)	47	6.3x7.7	0.16	91	
	33	4x5.4	0.30	29		100	6.3x7.7	0.16	100	
	47	4x5.4	0.30	31			8x6.2	0.16	100	
		5x5.4	0.30	46			8x10.2	0.16	230	
	100	5x5.4	0.30	47		220	8x10.2	0.16	230	
		6.3x5.4	0.30	71			10x10.2	0.16	310	
	220	6.3x5.4	0.35	80			330	8x10.2	0.16	290
		6.3x7.7	0.35	120		10x10.2		0.16	380	
	330	6.3x7.7	0.35	140		470	10x10.2	0.16	380	
		8x6.2	0.35	140		1000	12.5x13.5	0.26	510	
		8x10.2	0.35	290		1500	12.5x16	0.26	590	
	470	8x10.2	0.35	290		2200	16x16.5	0.26	900	
		10x10.2	0.35	380			4.7	4x5.4	0.12	22
		1000	8x10.2	0.35		290	6.8	4x5.4	0.12	25
10x10.2	0.35		410	10	5x5.4	0.12	30			
1500	10x10.2	0.35	460	22	5x5.4	0.14	35			
	2200	12.5x13.5	0.35		680	6.3x5.4	0.14	60		
10(13)	10	4x5.4	0.22	20	35(44)	33	6.3x7.7	0.14	80	
	22	4x5.4	0.22	23		47	8x6.2	0.14	80	
	33	4x5.4	0.22	26			6.3x5.4	0.14	60	
		5x5.4	0.22	45		6.3x7.7	0.14	100		
	47	5x5.4	0.22	60		100	8x10.2	0.14	210	
		6.3x5.4	0.22	70			6.3x7.7	0.14	105	
	100	5x5.4	0.30	60			8x10.2	0.14	240	
		6.3x5.4	0.30	71		10x10.2	0.14	310		
		6.3x7.7	0.30	110		12.5x13.5	0.14	390		
	220	6.3x7.7	0.30	120		220	8x10.2	0.14	260	
		8x6.2	0.30	120			10x10.2	0.14	350	
		8x10.2	0.26	260		330	10x10.2	0.14	370	
	330	6.3x7.7	0.3	200		470	12.5x13.5	0.22	520	
		8x10.2	0.30	290		680	12.5x13.5	0.22	590	
	470	8x10.2	0.30	320		1000	16x16.5	0.22	800	
		10x10.2	0.26	380		1500	16x16.5	0.22	1000	
	680	8x10.2	0.3	360		50(63)	1	4x5.4	0.12	10
	1000	10x10.2	0.26	410			2.2	4x5.4	0.12	16
2200	12.5x13.5	0.30	680	3.3	4x5.4		0.12	16		
10	4x5.4	0.16	28	4.7	5x5.4		0.12	23		
	22	4x5.4	0.16	29	6.8		5x5.4	0.12	30	
22	5x5.4	0.16	39	10	5x5.4		0.12	35		
	5x5.4	0.16	40		6.3x5.4		0.12	40		
33	5x5.4	0.16	42	22	6.3x5.4		0.12	42		
	6.3x5.4	0.16	70		6.3x7.7		0.12	65		
100	6.3x5.4	0.20	71	33	6.3x7.7		0.12	91		
	6.3x7.7	0.20	130		8x6.2		0.12	110		
	6.3x7.7	0.20	130		47		6.3x7.7	0.12	110	
220	8x6.2	0.20	130	8x6.2			0.12	110		
	8x10.2	0.20	150	8x10.2	0.12		210			
	10x10.2	0.20	210	100	8x10.2	0.12	240			
330	10x10.2	0.20	230		10x10.2	0.12	320			
470	8x10.2	0.20	240	150	10x10.2	0.12	300			
	10x10.2	0.20	380	220	10x10.2	0.12	330			
1000	12.5x13.5	0.34	550	330	12.5x13.5	0.16	490			
2200	16x16.5	0.34	900	470	12.5x16	0.18	550			
25(32)	3.3	4x5.4	0.14	18	100(125)	1000	16x16.5	0.18	800	
	4.7	4x5.4	0.14	22		10	6.3x7.7	0.18	50	
	6.8	4x5.4	0.14	25		22	8x10.2	0.18	100	
	10	4x5.4	0.14	25		33	8x10.2	0.18	120	
		5x5.4	0.14	28			10x10.2	0.18	150	
	22	5x5.4	0.14	28		47	10x10.2	0.18	170	
		6.3x5.4	0.14	55			12.5x13.5	0.18	250	
	33	6.3x5.4	0.14	65		100	12.5x13.5	0.18	300	
47	6.3x5.4	0.16	65							

DV General purpose Series

■ STANDARD RATINGS

Rated Voltage (SurageVoltage) (V)	Cap (μ F)	Case size Φ DxL(mm)	$\tan \delta$ (%)	Ripple current (mA/rms 105°C) (120Hz)	Rated Voltage (SurageVoltage) (V)	Cap (μ F)	Case size Φ DxL(mm)	$\tan \delta$ (%)	Ripple current (mA/rms 105°C) (120Hz)
160(200)	33	12.5x13.5	0.20	95	250(300)	33	16x16.5	0.20	180
	47	16x16.5	0.20	240		47	16x16.5	0.20	220
	100	16x16.5	0.20	250	400 (450)	3.3	12.5x13.5	0.25	40
200(250)	10	12.5x13.5	0.20	80		4.7	12.5x13.5	0.25	45
	22	12.5x16	0.20	110		10	12.5x13.5	0.25	50
	33	12.5x16	0.20	120		22	16x16.5	0.25	85
	47	16x16.5	0.20	220		33	16x16.5	0.25	85
250(300)	3.3	12.5x13.5	0.20	60	450 (500)	3.3	12.5x13.5	0.25	40
	4.7	12.5x13.5	0.20	65		4.7	12.5x13.5	0.25	45
	10	12.5x13.5	0.20	70		10	12.5x16	0.25	75
	22	12.5x13.5	0.20	105		22	16x16.5	0.25	85

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):

Click to view products by [Teapo manufacturer](#):

Other Similar products are found below :

[EEV-FK1E332W](#) [ULV2H1R8MNL1GS](#) [MAL214099813E3](#) [CA025M4R70REB-0405](#) [HUB1800-S](#) [34610](#) [RYK-50V101MG5TT-FL](#)
[107AXZ016MQ5](#) [RVJ-50V101MH10U-R](#) [EMVH101GRA221MMN0S](#) [MAL214097402E3](#) [MAL215375471E3](#) [MAL224699909E3](#)
[MAL224699813E3](#) [MAL215099014E3](#) [MAL215099017E3](#) [MAL215099117E3](#) [MAL215099818E3](#) [AEH1010331M025R](#)
[AEA1010221M035R](#) [AEH1010221M025R](#) [AEA1010102M016R](#) [AEA0810331M025R](#) [AEA1213102M025R](#) [AEA1213331M050R](#)
[AEH1012471M016R](#) [MAL213967339E3](#) [ZSC00AF2211EARL](#) [VB1E100MB054000CE0](#) [RVT0J471M0607](#) [RVT1000UF10V34RV0081](#)
[XT100UF50V90RV0067](#) [RVE100UF16V67RV0046](#) [RST22UF35V025](#) [RVT100UF16V67RV0120](#) [XT47UF50V90RV0082](#)
[XT22UF50V90RV0083](#) [RST22UF50V026](#) [RST10UF16V013](#) [RST100UF25V004](#) [RST100UF35V009](#) [RST47UF25V035](#) [RST47UF50V038](#)
[RST220UF25V019](#) [RSL220UF25V021](#) [XT10UF25V90RV0068](#) [FZ100UF50V90RV0066](#) [RST100UF16V003](#) [XT100UF10V90RV0060](#)
[XT100UF16V90RV0061](#)