



SEA & LAND ELECTRONIC CORP.

WWW.SEALAND-PPTC.COM



ALPHA-TOP TECHNOLOGY CORP.

WWW.ALPHA-TOP.COM

APPROVAL SHEET

MODEL NO.: mSMD200-16V

CUSTOMER:

CUSTOMER'S APPROVAL:

AUTHORIZED SIGNATURE/STAMP:

DATE

MANUFACTURER:

HEAD OFFICE:

13F.,No.120-10,Sec.3,Zhongshan Rd.,Zhonghe Dist.,New Taipei City 23544,Taiwan

Tel: 886-2-8221-2567

Fax:882-2-2225-7268

E-mail:service@chipfast.com.tw

China Branch:

31 Chang-Xin-Zon Road,Gao-Ling Industrial Zone,Chiu-chang Town,

Huey Yang Distric,Huey Zhou City,Guang Dong516221,CHINA

Tel: 86-752-3562001

Fax:86-752-3558696

E-mail:service@atpptc.com

Submitted by:

Chung Cheng


Approved by:

YC Lin

DATE:

9-Aug-12

SEA & LAND ELECTRONIC CORP.



mSMD200-16V

Features

- Surface Mount Devices
- Lead free device
- Size 4.5*3.2 mm/0.18*0.12 inch
- Surface Mount packaging for automated assembly

Applications

- Almost anywhere there is a low voltage power supply, up to 60V and a load to be protected, including:
- Computer mother board, Modem, USB hub
 - PDAs & Charger, Analog & digital line card
 - Digital cameras, Disk drivers, CD-ROMs,

Alpha-Top (Sea & Land Alliance)

Performance Specification

| Model | V _{max} (Vdc) | I _{max} (A) | I _{hold} @25°C (A) | I _{trip} @25°C (A) | P _d Typ. (W) | Maximum Time To Trip | | Resistance | | Agency Approval | |
|-------------|---------------------------|-------------------------|-----------------------------------|-----------------------------------|-------------------------------|----------------------|---------------|---------------------------|---------------------------|-----------------|-----|
| | | | | | | Current (A) | Time (Sec) | R _{i min} (Ω) | R _{1 max} (Ω) | UL | TUV |
| mSMD200-16V | 16.0 | 100 | 2.00 | 4.00 | 0.8 | 8.0 | 2.00 | 0.020 | 0.100 | | |

I_{hold} = Hold Current. Maximum current device will not trip in 25°C still air.
I_{trip} = Trip Current. Minimum current at which the device will always trip in 25°C still air.
V_{max} = Maximum operating voltage device can withstand without damage at rated current (I_{max}).
I_{max} = Maximum fault current device can withstand without damage at rated voltage (V_{max}).
P_d = Power dissipation when device is in the tripped state in 25°C still air environment at rated voltage.
R_{imin/max} = Minimum/Maximum device resistance prior to tripping at 25°C.
R_{1max} = Maximum device resistance is measured one hour post reflow.
CAUTION : Operation beyond the specified ratings may result in damage and possible arcing and flame.

Environmental Specifications

| Test | Conditions | Resistance change |
|--|-----------------------------|-------------------|
| Passive aging | +85°C, 1000 hrs. | ±5% typical |
| Humidity aging | +85°C, 85% R.H. , 168 hours | ±5% typical |
| Thermal shock | +85°C to -40°C, 20 times | ±33% typical |
| Resistance to solvent | MIL-STD-202, Method 215 | No change |
| Vibration | MIL-STD-202, Method 201 | No change |
| Ambient operating conditions : - 40 °C to +85 °C | | |
| Maximum surface temperature of the device in the tripped state is 125 °C | | |

Agency Approvals :

UL pending

Regulation/Standard:



2002/95/EC



EN14582


I_{hold} Versus Temperature

| Model | Maximum ambient operating temperature (T _{max}) vs. hold current (I _{hold}) | | | | | | | | |
|-------------|---|-------|------|------|------|------|------|------|------|
| | -40°C | -20°C | 0°C | 25°C | 40°C | 50°C | 60°C | 70°C | 85°C |
| mSMD200-16V | 2.88 | 2.61 | 2.25 | 2.00 | 1.80 | 1.66 | 1.45 | 1.09 | 0.80 |


Construction And Dimension (Unit:mm)

| Model | A | | B | | C | | D | | E | |
|-------------|------|------|------|------|------|------|------|------|------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| mSMD200-16V | 4.37 | 4.73 | 3.07 | 3.41 | 0.60 | 1.30 | 0.30 | 0.30 | 0.25 | 0.25 |

Dimensions & Marking

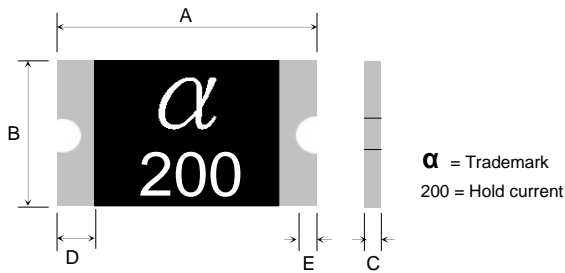

Recommended Pad Layout (mm)

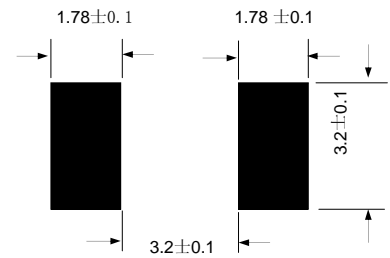


Termination Pad Characteristics

Terminal pad materials : Tin-plated Nickel-Copper
 Terminal pad solderability : Meets EIA specification RS186-9E and ANSI/J-STD-002 Category 3.


Rework

Use standard industry practices, the removal device must be replaced with a fresh one.

Thermal Derating Curve

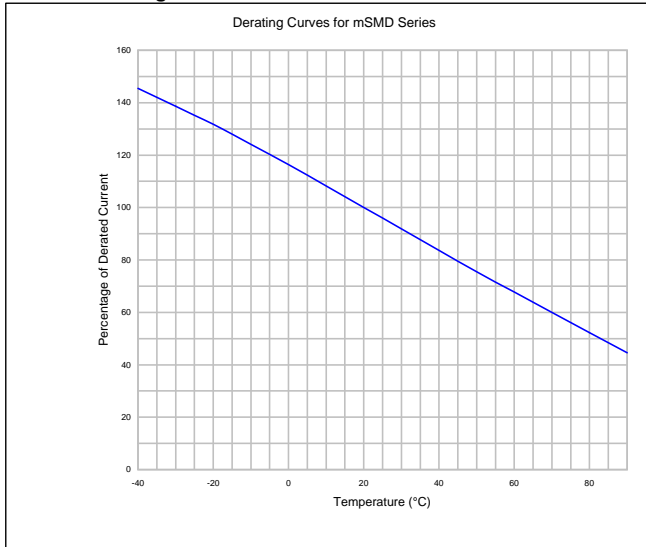


Typical Time-To-Trip At 25°C

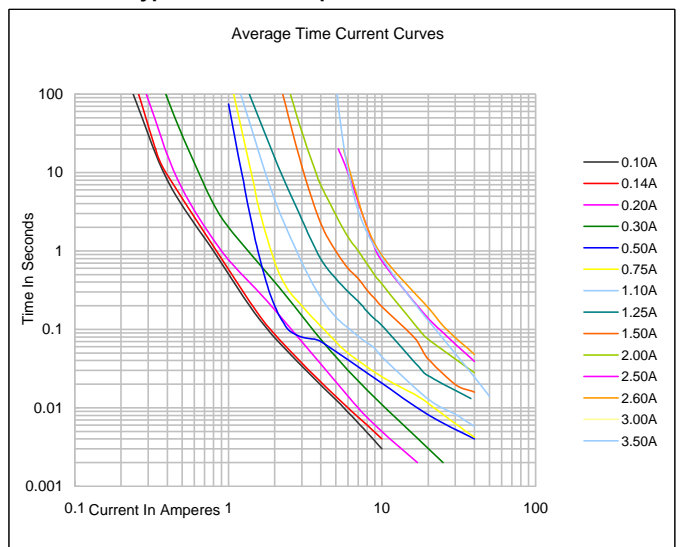

WARNING:

- Use PPTC beyond the maximum ratings or improper use may result in device damage and possible electrical arcing and flame.
- PPTC are intended for protection against occasional over current or over temperature fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated.
- Device performance can be impacted negatively if devices are handled in a manner inconsistent with recommended electronic, thermal, and mechanical procedures for electronic components.
- Use PPTC with a large inductance in circuit will generate a circuit voltage (L di/dt) above the rated voltage of the PPTC.
- Avoid impact PPTC device its thermal expansion like placed under pressure or installed in limited space.
- Contamination of the PPTC material with certain silicon based oils or some aggressive solvents can adversely impact the performance of the devices. PPTC SMD can be cleaned by standard methods.
- Requests that customers comply with our recommended solder pad layouts and recommended reflow profile. Improper board layouts or reflow profile could negatively impact solderability.

Recommended Solder Reflow Conditions

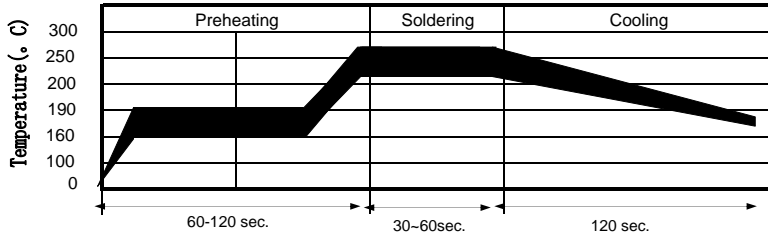


- Recommended reflow methods : IR, vapor phase oven, hot air oven.
- Devices are not designed to be wave soldered to the bottom side of the board.
- Recommended maximum paste thickness is 0.25 mm (0.010 inch).
- Devices can be cleaned using standard method and solvents.
- Note : If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.


Tape And Reel Specifications (mm)

| Governing Specifications | EIA 481-1 |
|--------------------------|------------------|
| W | 12 ± 0.3 |
| P0 | 4.0 ± 0.10 |
| P1 | 8.0 ± 0.10 |
| P2 | 2.0 ± 0.05 |
| A0 | 3.5 ± 0.23 |
| B0 | 5.1 ± 0.15 |
| B1max. | 5.9 |
| D0 | 1.5 + 0.1, -0 |
| F | 5.5 ± 0.05 |
| E1 | 1.75 ± 0.10 |
| E2min. | 10.25 |
| Tmax. | 0.6 |
| T1max. | 0.1 |
| K0 | 0.9 ± 0.15 |
| Leader min. | 390 |
| Trailer min. | 160 |
| Reel Dimensions | |
| A max. | 178 |
| N min. | 60 |
| W1 | 12.4 + 2.0, -0.0 |
| W2max. | 18.4 |

EIA Tape Component Dimensions

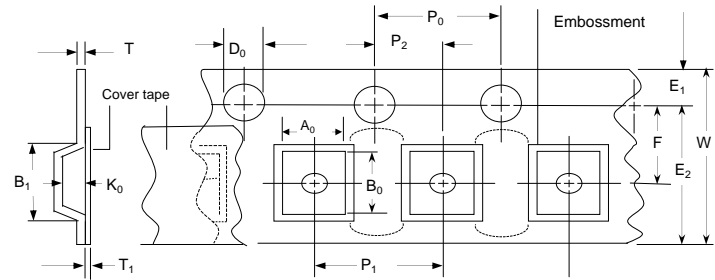

EIA Reel Dimensions

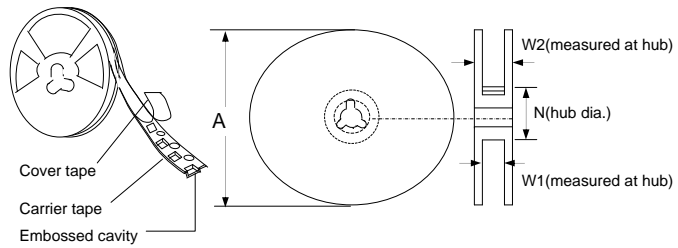

Storage And Handling

- Storage conditions : 40°C max, 70% R.H.
- Devices may not meet specified performance if storage conditions are exceeded.

Order Information

Packaging

| mSMD | 200 | -16V | Tape & Reel Quantity |
|----------------------------|---------|---------|----------------------|
| Product name | Hold | Max | 1,500 pcs/reel |
| Size 4532mm/1812 inch | Current | Voltage | |
| SMD : surface mount device | 2.00A | | |

Tape & reel packaging per EIA481-1

Labeling Information

Sea & Land Electronic Corp.

HF Pb RoHS

Model:
Part no.:
Spec.:
Lot no.:
Q'ty:

倉儲：密封！溫度：18~33℃/濕度：30~60% A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Resettable Fuses - PPTC](#) category:

Click to view products by [TECHFUSE](#) manufacturer:

Other Similar products are found below :

[RF0077-000](#) [RF3256-000](#) [RF3281-000](#) [RF3301-000](#) [RF3341-000](#) [RF3344-000](#) [RF3382-000](#) [SMD125-2](#) [RF2171-000](#) [RF2531-000](#) [RF2873-000](#) [RF3060-000](#) [TR600-150Q-B-0.5-0.130](#) [RXE090](#) [5E4795/04-1502](#) [TRF250-080T-B-1.0-0.125](#) [SMD100-2](#) [NIS5452MT1TXG](#) [NIS5431MT1TXG](#) [SMD250-2](#) [0ZCM0001FF2G](#) [0ZCM0003FF2G](#) [0ZCM0004FF2G](#) [BK60-017-DZ-E0.6](#) [F95456-000](#) [LVR100S](#) [RS30-090](#) [RS30-110](#) [RS30-600](#) [RS30-700](#) [RS30-800](#) [RS30-900](#) [RS60RB-005](#) [RS60RB-010](#) [RS60RB-020](#) [RS60RB-025](#) [RS60RB-050](#) [RS60RB-075](#) [RS60RB-160](#) [RS60SB-250](#) [ASMD0603-010-30V](#) [ASMD0603-025-16V](#) [ASMD2920-260-24V](#) [BSMD0603-025-12V](#) [BSMD1206-150-12V](#) [BSMD0805-020-33V](#) [BSMD1206-075-13.2V](#) [BSMD2920-400-6V](#) [BSMD2920-300-6V](#) [BSMD2920-700-6V](#)