

Features

- High reverse impedance;
- Speed is fast.

Applications

- High speed switch circuit

Ordering Information

Part Number	Qty per Reel	Reel Size
1N4148WT	3000	7"







Absolute Maximum Ratings (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
反向峰值电压/Non-Repetitive Peak Reverse Voltage	V_{RM}	100	V
重复反向峰值电压/ Repetitive Peak Reverse Voltage	V_{RRM}	75	V
重复正向峰值电流/ Repetitive Peak Forward Current	I_{FRM}	300	mA
连续正向电流/Continuous Forward Current	I_o	150	mA
正向瞬间峰值电流 @=1.0μS Peak Forward Surge Current	I_{FSM}	2	A
功率/ Power Dissipation	P_D	0.2	W
储存温度/Storage Temperature	Tstg	-55 ~ 150	°C


Electrical Characteristics (TA=25°C unless otherwise specified)

Parameter	Symbol	Conditions	Min	Max	Unit
击穿电压/Break Voltage	B _V	I _R =100μ A	100		V
		I _R =5μ A	75		
正向电压/Forward Voltage	V _F	I _F =10mA		1	V
反向漏电流/Reverse Current	I _{R1}	V _R =75V		5	μ A
	I _{R2}	V _R =20V		25	nA
端电容/Capacitance Between Terminals	C _T	V _R =0, f=1MHz		4	pF
反向恢复时间/Reverse Recovery Time	t _{rr}	I _F =10mA, I _R =60mA I _{rr} =1mA, R _L =100Ω		4	nS

Typical Characteristics

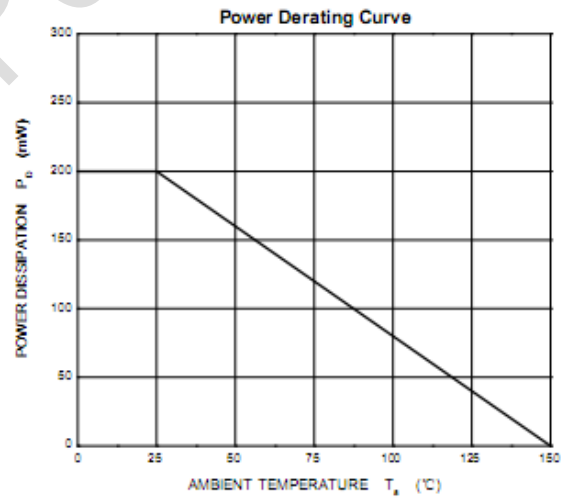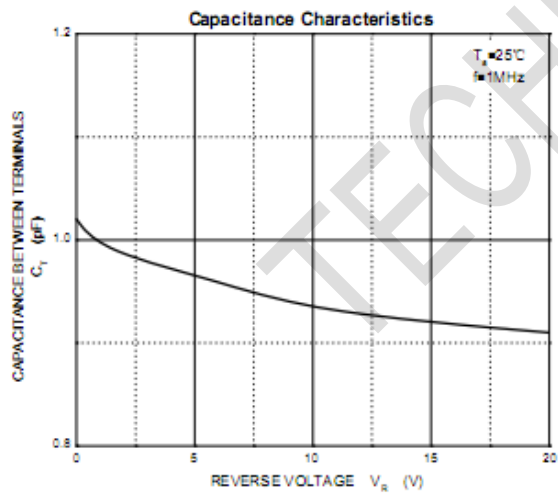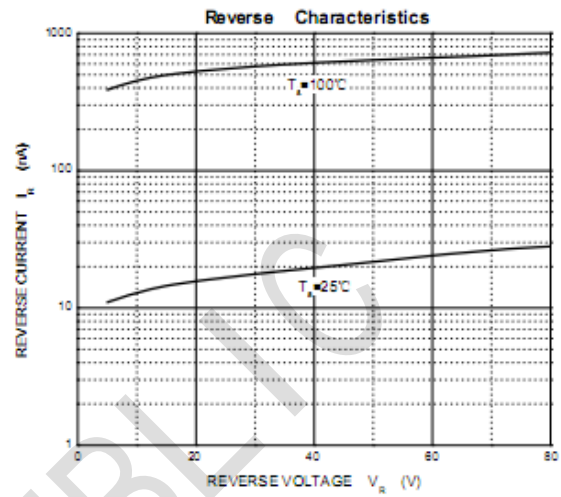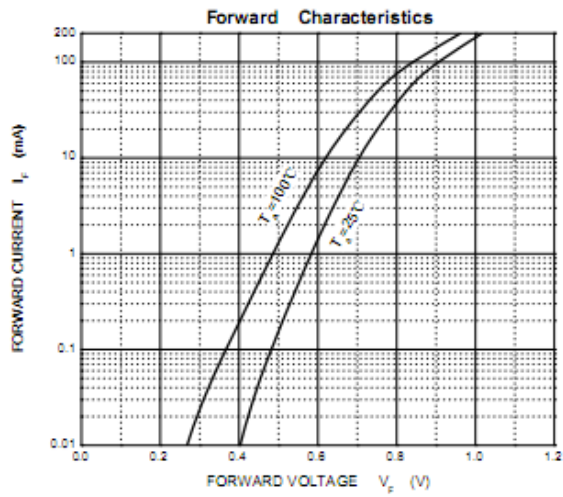


Outline Drawing - SOD-523

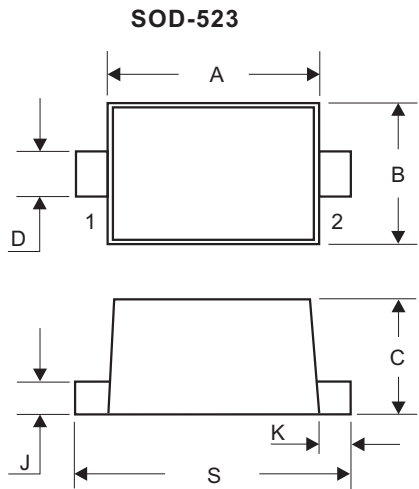

DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	1.10	1.30	0.043	0.051
B	0.70	0.90	0.028	0.035
C	0.50	0.70	0.020	0.028
D	0.25	0.35	0.010	0.014
J	0.07	0.20	0.0028	0.0079
K	0.15	0.25	0.006	0.010
S	1.50	1.70	0.059	0.067

Land Pattern - SOD-523

Recommended Mounting Pad Layout

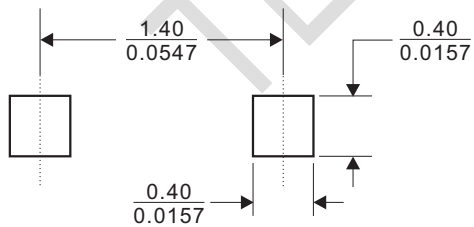

Dimensions in (millimeters)
 inches

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category](#):

Click to view products by [TECH PUBLIC manufacturer](#):

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [RGP30G-E373](#) [BAQ333-TR](#) [BAQ335-TR](#) [BAQ33-GS18](#) [BAS1602VH6327XT](#) [BAV17-TR](#) [BAV19-TR](#) [BAV301-TR](#) [BAW27-TAP](#) [NSVBAV23CLT1G](#) [NTE525](#) [1SS181-TP](#) [1SS184-TP](#) [1SS193,LF](#) [1SS193-TP](#) [1SS400CST2RA](#) [SBAV99LT3G](#) [SDAA13](#) [LL4448-GS18](#) [SHN2D02FUTW1T1G](#) [LS4150GS18](#) [LS4151GS08](#) [SMMBD7000LT3G](#) [1N4449](#) [1N4934-E3/73](#) [APT100DL60HJ](#) [RFUH20TB3S](#) [RGP30G-E354](#) [RGP30M-E3/73](#) [D291S45T](#) [MCL4151-TR](#) [BAS 16-02L E6327](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAS33-TAP](#) [BAS 70-02V H6327](#) [BAV300-TR](#) [BAV303-TR3](#) [BAW27-TR](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#) [BAW76-TR](#) [MM230L-CAA](#) [MMSD914-TP](#) [IDW40E65D1](#)