




Features

- High Current Capability
- Low Forward Voltage Drop

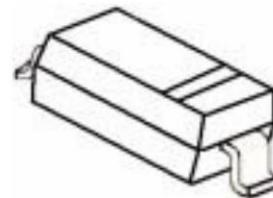

Mechanical Data

- SOD-123 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any



Maximum Ratings & Thermal Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)

Parameters	Symbol	1N5817W	1N5818W	1N5819W	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	V
Maximum RMS voltage	V _{RMS}	14	21	28	V
Maximum DC blocking voltage	V _{DC}	20	30	40	V
Maximum average forward rectified current	I _{FM}		1.0		A
Peak forward surge current 8.3 ms single half sine-wave	I _{FSM}		9		A
Typical Current Squared Time	I ² T		0.336		A ² S
Typical thermal resistance	R _{θJA}		250		°C/W
Power Dissipation	P _D		500		mW
Storage temperature range	T _{STG} / T _J		-50-+150		°C


Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified).

Parameters	Symbol	Test conditions	1N5817W	1N5818W	1N5819W	Unit
Maximum forward voltage	V _F	IF = 0.5A IF = 1.0A IF = 3.0A	- 0.450 0.750	0.450 0.550 0.875	0.450 0.600 0.900	V
Maximum reverse breakdown voltage	V _R	IR=1mA	20	30	40	V
Maximum reverse current	I _R	VR=20V 1N5817W VR=30V 1N5818W VR=40V 1N5819W			1.0	mA
Type junction capacitance	C _j	VR = 4.0V, f = 1MHz			120	pF

RATING AND CHARACTERISTICS CURVES

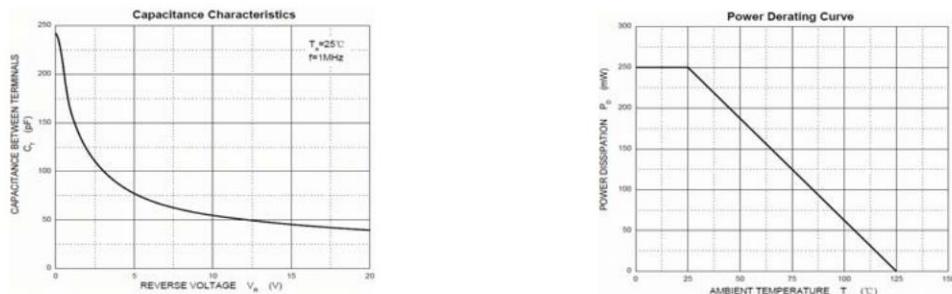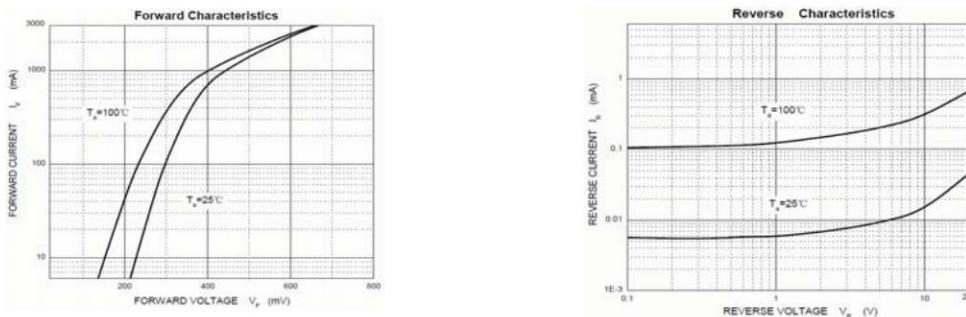


SOD-123 PA CKAGE OUTLINE Plastic surface mounted package

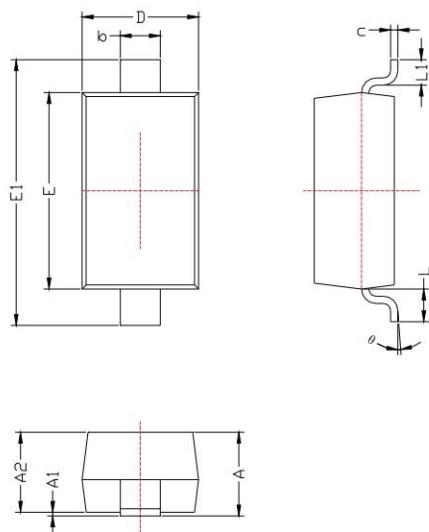

SYMBOL	DIMENSIONS	
	MIN.	MAX.
A	1.050	1.250
A ₁	0.000	0.100
A ₂	1.050	1.150
b	0.450	0.650
C	0.080	0.150
D	1.500	1.700
E	2.600	2.800
E ₁	3.550	3.850
L	0.500REF	
L ₁	0.250	0.450
θ	0°	8°

Precautions: PCB Design(Recommended land dimensions for SOD-123 diode. Electrode patterns for PCBs)

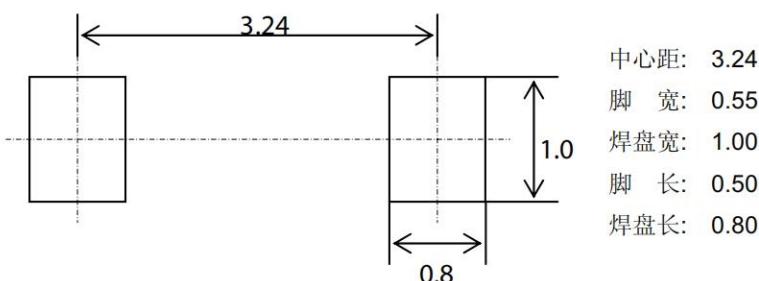

中心距: 3.24

脚 宽: 0.55

焊盘宽: 1.00

脚 长: 0.50

焊盘长: 0.80

技术要求:

1, 塑封体尺寸: 2.70 X 1.60

2: 未注公差为: ± 0.05

3, 所有单位: mm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by TECH PUBLIC manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS16E6433HTMA1](#)
[BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#)
[SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MA4E2501L-1290](#)
[MBRB30H30CT-1G](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#)
[NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA2100-HF](#)
[ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ060-M3/5BT](#)
[NRVB130LSFT1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#)