


FEATURES

- $R_{DS(ON)} = 60m\Omega @ V_{GS} = -10V$ (Max)
- $R_{DS(ON)} = 90m\Omega @ V_{GS} = -4.5V$ (Max)

APPLICATIONS

- Power Management in Note book
- Portable Equipment
- Battery Powered System
- DC/DC Converter
- Load Switch
- DSC
- LCD Display inverter

Package and Pin Configuration

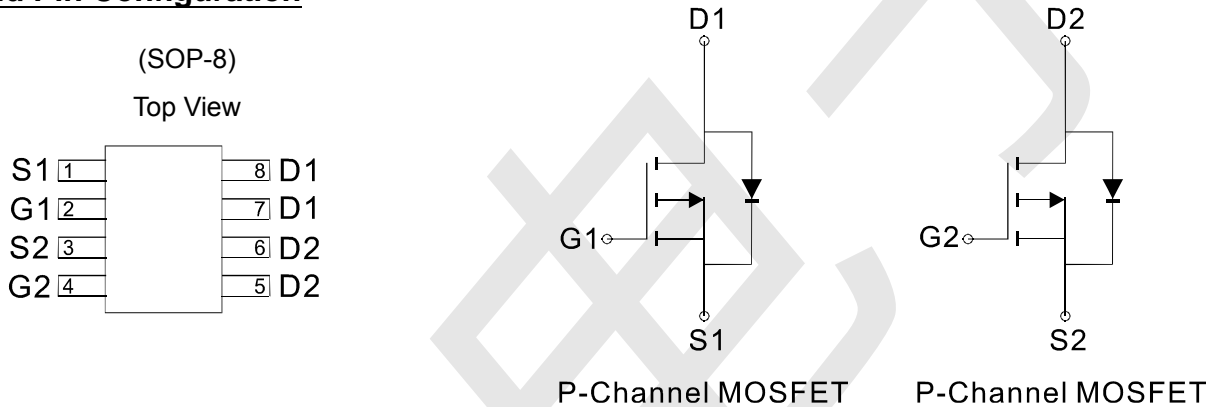







Absolute Maximum Ratings ($T_A = 25^\circ C$ unless otherwise noted)





Parameter	Symbol	Limit	Unit	
Drain-Source Voltage	V_{DSS}	-30	V	
Gate-Source Voltage	V_{GSS}	± 20	V	
Continuous Drain Current ($T_j = 150^\circ C$)	I_D	$T_A = 25$	-5.3	A
		$T_A = 70$	-4.3	
Pulsed Drain Current	I_{DM}	-30	A	
Continuous Source Current (Diode Conduction)	I_S	-1.7	A	
Maximum Power Dissipation	P_D	$T_A = 25$	2.0	W
		$T_A = 70$	1.3	
Operating Junction Temperature	T_J	-55 to 150		
Storage Temperature Range	T_{stg}	-55 to 150		
Thermal Resistance-Junction to Ambient*	$R_{\theta JA}$	T 10 sec	47	W
		Steady State	75	
Thermal Resistance-Junction to Case	$R_{\theta JC}$	45	W	

Electrical Characteristics (T_j=25°C unless otherwise noted)


Symbol	Parameter	Limit	Min	Typ	Max	Unit
STATIC						
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250 μA	-1	-1.4	-3	V
I _{GSS}	Gate Leakage Current	V _{DS} =0V, V _{GS} =±20V			±100	nA
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-30V, V _{GS} =0V			-1	μA
		V _{DS} =-30V, V _{GS} =0V T _J =55			-25	
R _{DS(ON)}	Drain-Source On-Resistance	V _{GS} =-10V, I _D = -5.3A		50	60	m
		V _{GS} =-4.5V, I _D = -4.2A		69	90	
V _{SD}	Diode Forward Voltage	I _S =-1.7A, V _{GS} =0V		-0.8	-1.2	V
DYNAMIC						
R _g	Gate resistance	V _{DS} =0V, V _{GS} =0V, f=1MHz		3.5		Ω
C _{iss}	Input capacitance	V _{DS} =-15V, V _{GS} =0V, f=1.0MHz		450	490	pF
C _{oss}	Output Capacitance			70		
C _{rss}	Reverse Transfer Capacitance			20		
Q _g	Total Gate Charge	V _{DS} =-15V, V _{GS} =-10V, I _D =-5.3A		14	17	nC
Q _{gs}	Gate-Source Charge			4		
Q _{gd}	Gate-Drain Charge			3		
t _{d(on)}	Turn-On Delay Time	V _{DD} =-15V, R _L =15Ω I _D =-1.0A, V _{GEN} =-10V R _G =6Ω		27	33	ns
t _r	Turn-On Rise Time			11	15	
t _{d(off)}	Turn-Off Delay Time			40	52	
t _f	Turn-Off Fall Time			4	6	

Typical Electrical and Thermal Characteristics

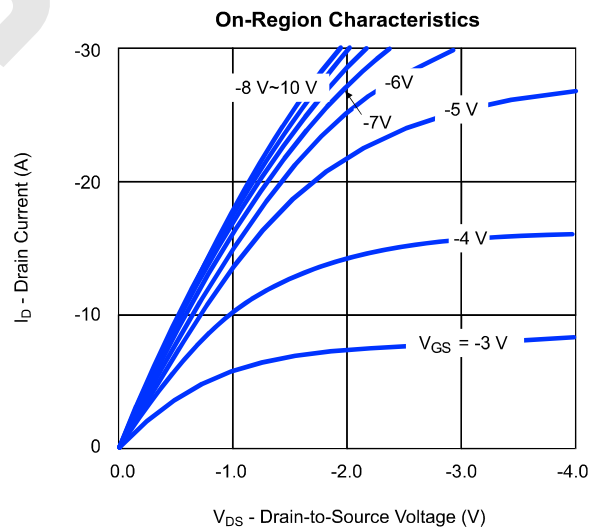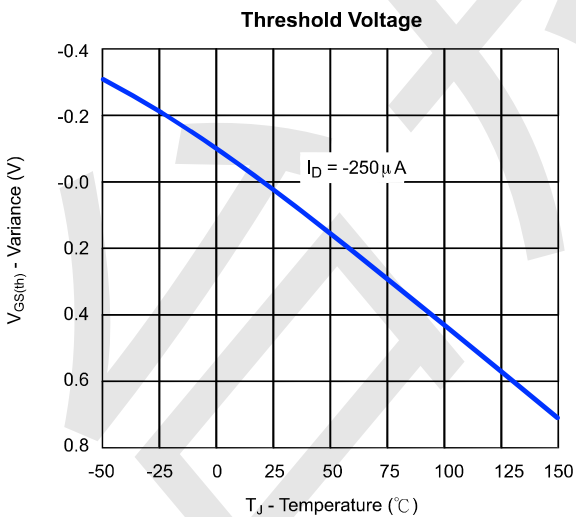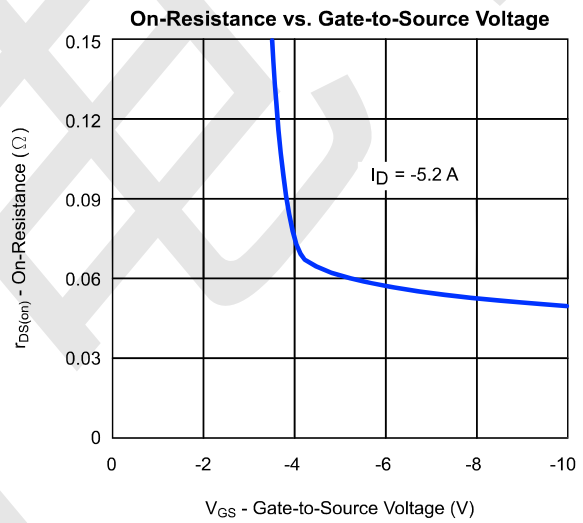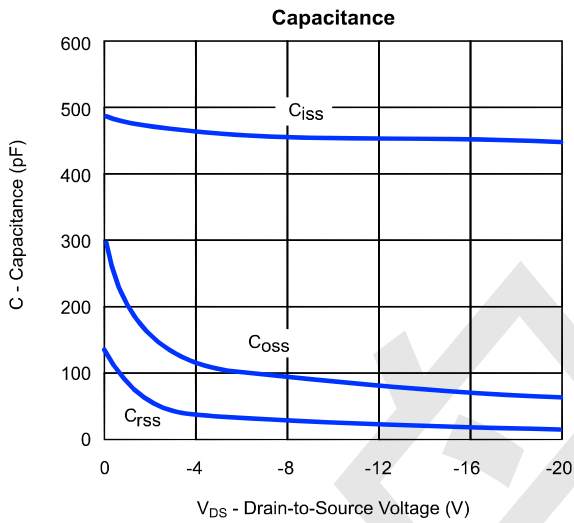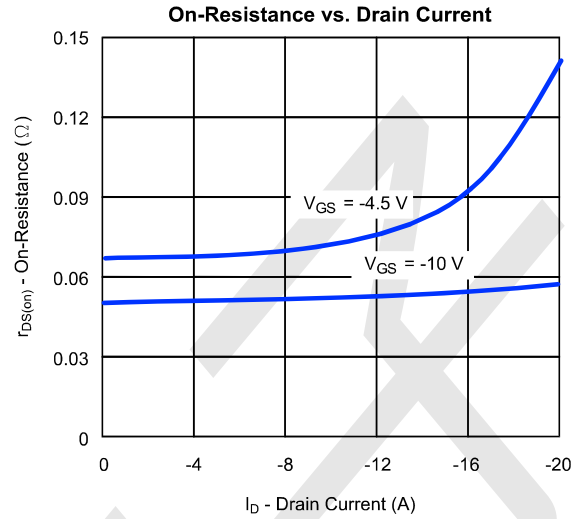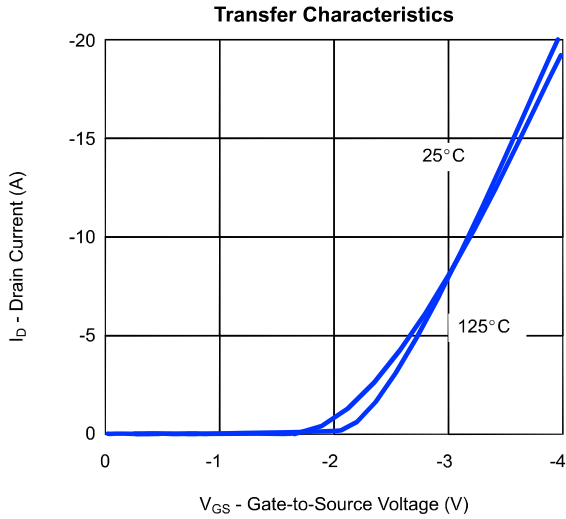

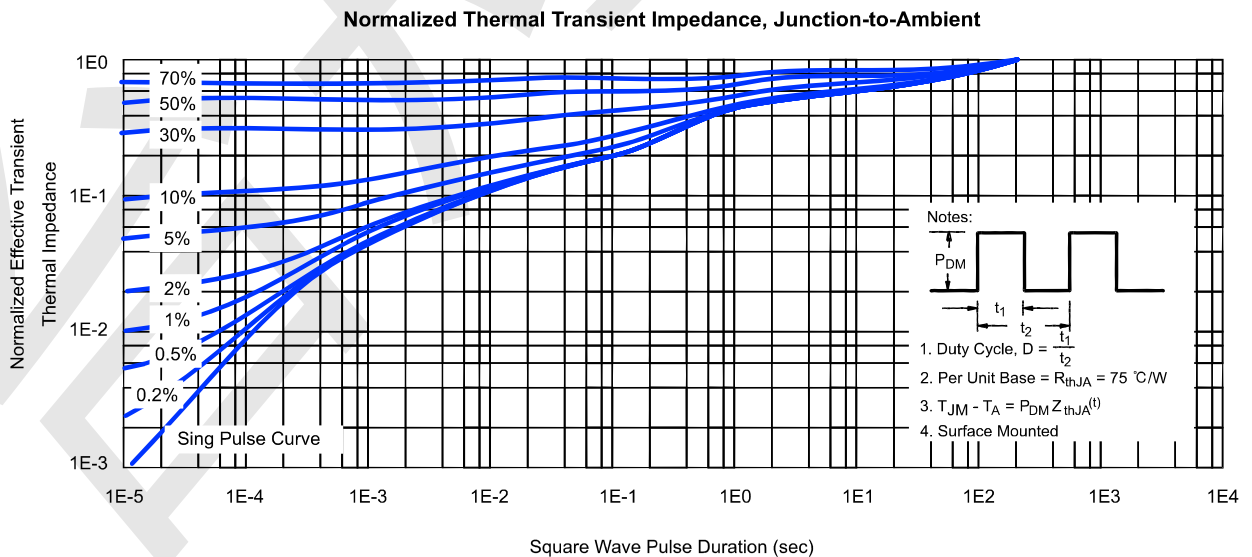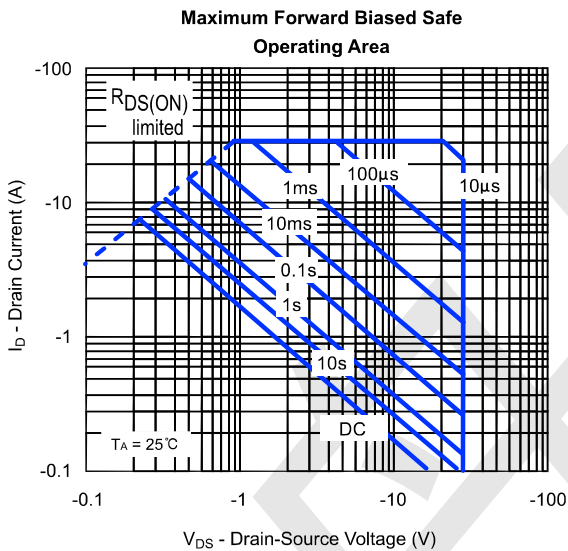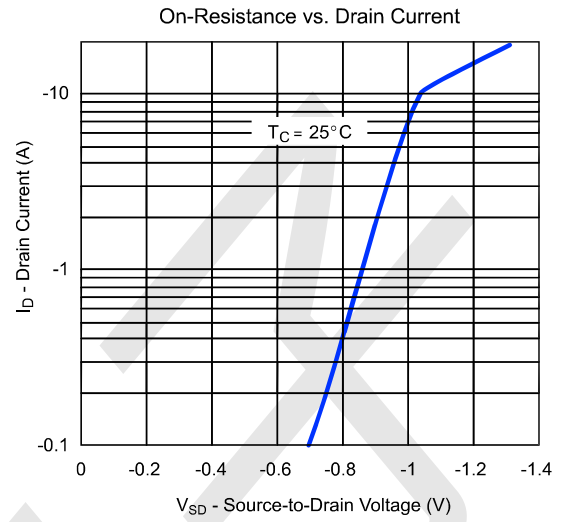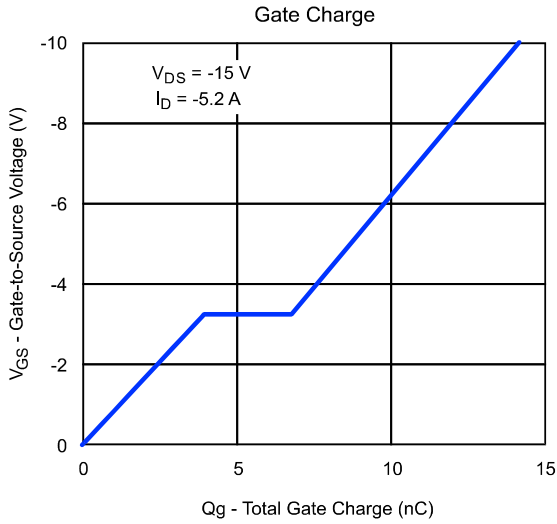

SOP-8 Package Information

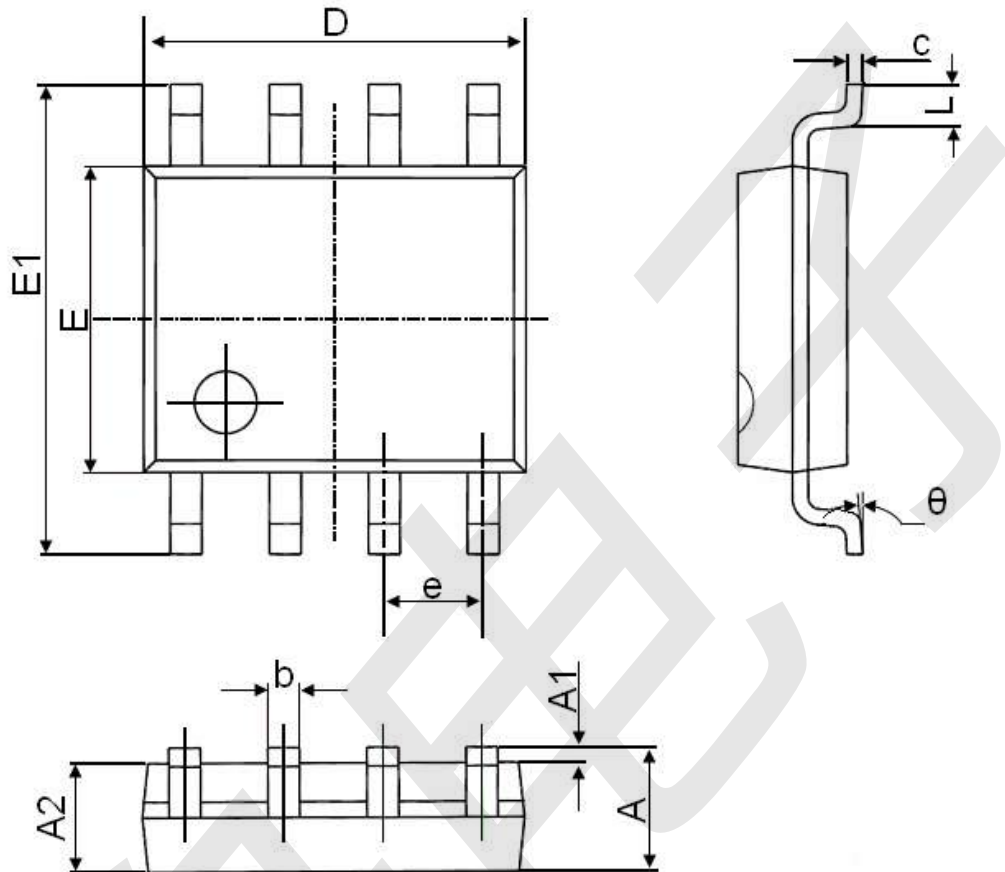

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [TECH PUBLIC](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [TK100A10N1,S4X\(S](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [TK31J60W5,S1VQ\(O](#) [TK31J60W,S1VQ\(O](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#)
[DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#)
[DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [IPS60R360PFD7SAKMA1](#)
[DMN2990UFB-7B](#) [SSM3K35CT,L3F](#) [IPLK60R1K0PFD7ATMA1](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPWS65R035CFD7AXKSA1](#)
[MCQ7328-TP](#) [SSM3J143TU,LXHF](#) [DMN12M3UCA6-7](#) [PJMF280N65E1_T0_00201](#) [PJMF380N65E1_T0_00201](#)
[PJMF280N60E1_T0_00201](#) [PJMF600N65E1_T0_00201](#) [PJMF900N65E1_T0_00201](#)