




Features

- High Current Capability
- Low Forward Voltage Drop

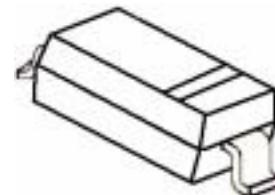

Mechanical Data

- SOD-123 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any

Marking: B5817W: SJ
B5818W: SK
B5819W: SL



Maximum Ratings & Thermal Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)

| Parameters | Symbol | B5817W | B5818W | B5819W | Unit |
|---|-----------------------------------|--------|----------|--------|------------------|
| Maximum repetitive peak reverse voltage | VR _{RM} | 20 | 30 | 40 | V |
| Maximum RMS voltage | VR _{RMS} | 14 | 21 | 28 | V |
| Maximum DC blocking voltage | V _{DC} | 20 | 30 | 40 | V |
| Maximum average forward rectified current | I _{FM} | | 1.0 | | A |
| Peak forward surge current 8.3 ms single half sine-wave | I _{FSM} | | 9 | | A |
| Typical Current Squared Time | I ² T | | 0.336 | | A ² S |
| Typical thermal resistance | R _{θJA} | | 250 | | °C/W |
| Power Dissipation | PD | | 500 | | mW |
| Storage temperature range | T _{STG} / T _J | | -50-+150 | | °C |


Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)

| Parameters | Symbol | Test conditions | B5817W | B5818W | B5819W | Unit |
|-----------------------------------|----------------|---|---------------------|-------------------------|-------------------------|------|
| Maximum forward voltage | V _F | IF = 0.5A IF = 1.0A IF = 3.0A | - 0.450 0.750 | 0.450 0.550 0.875 | 0.450 0.600 0.900 | V |
| Maximum reverse breakdown voltage | V _R | IR=1mA | 20 | 30 | 40 | V |
| Maximum reverse current | I _R | VR=20V B5817W VR=30V B5818W VR=40V B5819W | | 1.0 | | mA |
| Type junction capacitance | C _j | VR = 4.0V, f = 1MHz | | 120 | | pF |

RATING AND CHARACTERISTICS CURVES (B5817W THRU B5819W)

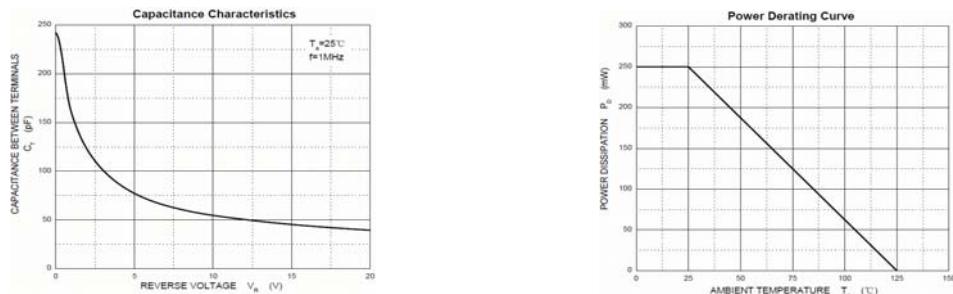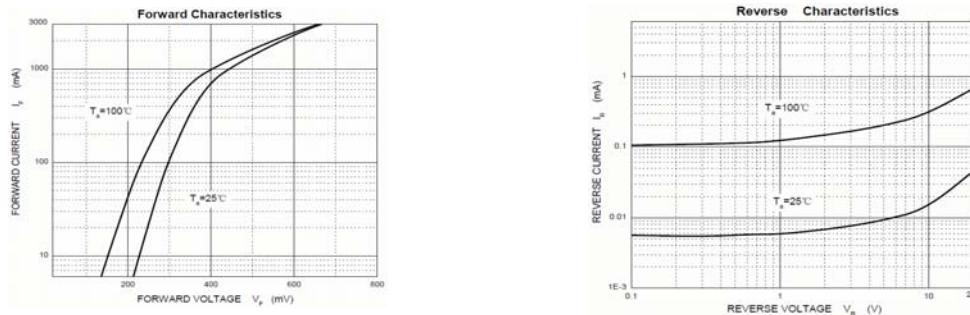


SOD-123 PA CKAGE OUTLINE Plastic surface mounted package

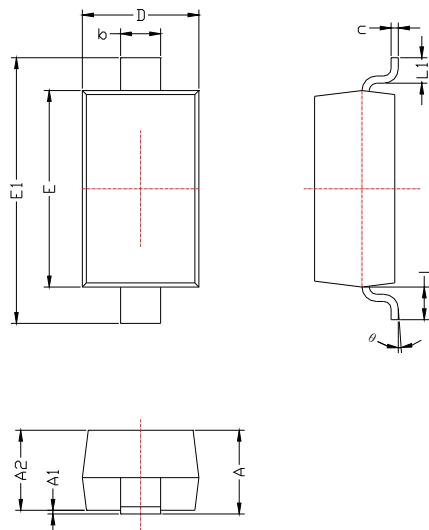

| SYMBOL | DIMENSIONS | |
|----------------|------------|-------|
| | MIN. | MAX. |
| A | 1.050 | 1.250 |
| A ₁ | 0.000 | 0.100 |
| A ₂ | 1.050 | 1.150 |
| b | 0.450 | 0.650 |
| c | 0.080 | 0.150 |
| D | 1.500 | 1.700 |
| E | 2.600 | 2.800 |
| E ₁ | 3.550 | 3.850 |
| L | 0.500REF | |
| L ₁ | 0.250 | 0.450 |
| θ | 0° | 8° |

Precautions: PCB Design(Recommended land dimensions for SOD-123 diode. Electrode patterns for PCBs)

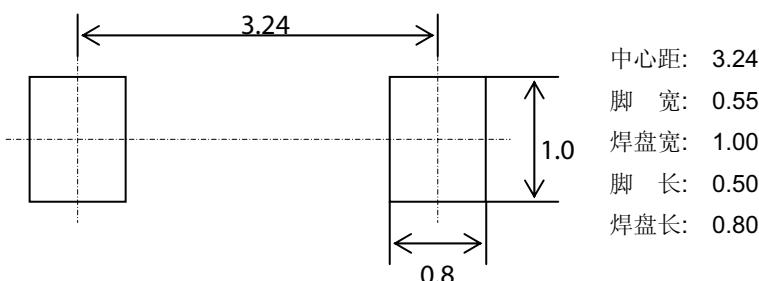

中心距: 3.24

脚 宽: 0.55

焊盘宽: 1.00

脚 长: 0.50

焊盘长: 0.80

技术要求:

1, 塑封体尺寸: 2.70 X 1.60

2: 未注公差为: ± 0.05

3, 所有单位: mm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by TECH PUBLIC manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS16E6433HTMA1](#)
[BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#)
[SBS818-TL-E](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#)
[MBRB30H30CT-1G](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#)
[NTE505](#) [NTSB30U100CT-1G](#) [SS0503SH-TL-E](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#)
[ACDBA2100-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#)
[10BQ060-M3/5BT](#) [NRVB130LSFT1G](#) [CRS08TE85LQM](#)