


General Features

- 600V/16mA, $R_{DS(ON)}=700\Omega@V_{GS}=10V$
- 600V/3mA, $R_{DS(ON)}=700\Omega@V_{GS}=4.5V$
- Depletion-mode (Normally-on)
- Improved ESD ability Fast switching
- Improved dv/dt capability
- SOT-23 package design


Application

- Desk PC Power Supply
- AC adapter
- LCD TC Power Supply

Package and Pin Configuration

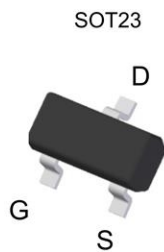

Circuit diagram

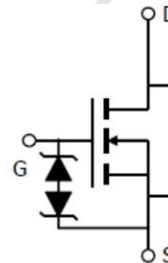

Marking :F5xxx Or SHs

F5= is part number, fixed
xxx= is internal code

Pin Define

Pin	Symbol	Description
1	G	Gate
2	S	Source
3	D	Drain

Absolute Maximum Ratings ($T_A=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	600	V
Gate –Source Voltage	V_{GSS}	20	V
Continuous Drain Current($T_J=150^\circ C$)	I_D	$T_c=25^\circ C$	30
		$T_c=100^\circ C$	27
Pulsed Drain Current	I_{DM}	120	mA
Continuous Source Current	I_S	30	mA
Power Dissipation	P_D	$T_A=25^\circ C$	0.5
		$T_A=25^\circ C$	0.004
Operating Junction Temperature	T_J	-55/150	$^\circ C$
Storage Temperature Range	T_{STG}	-55/150	$^\circ C$
Thermal Resistance-Junction to Case	$R_{\theta JC}$	50	$^\circ C/W$
Thermal Resistance-Junction to Ambient	$R_{\theta JA}$	250	$^\circ C/W$

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)


($T_A=25^\circ\text{C}$ Unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ	Max.	Unit
Static						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=-5V, I_D=250\mu A$	600			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=3V, I_D=8\mu A$	-2.7		-1.0	
Gate Leakage Current	I_{GSS}	$V_{DS}=0V, V_{GS}=20V$			10	μA
Drain-Source Leakage Current	$I_{D(off)}$	$V_{DS}=600V, V_{GS}=-5V$			0.1	μA
On-state drain current	I_{DSS}	$V_{GS}=0V, V_{DS}=25V$	12			mA
Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=16mA$		310	700	Ω
		$V_{GS}=0V, I_D=3mA$		330	700	
Diode Forward Voltage	V_{SD}	$I_S=16mA, V_{GS}=-5V$		0.85	1.2	V
Dynamic						
Total Gate Charge	Q_g	$V_{DS}=400V, V_{GS}=-5V$ to 5V			1.8	nC
Gate-Source Charge	Q_{gs}	$I_D=0.01A$			0.75	
Gate-Drain Charge	Q_{gd}	(Note 1,2)			0.56	
Input Capacitance	C_{iss}	$V_{DS}=25V, V_{GS}=-5V$ $f=1MHz$			99	pF
Output Capacitance	C_{oss}				9.1	
Reverse Transfer Capacitance	C_{rss}				5	
Turn-On Time	$t_{d(on)}$	$V_{DD}=300V$			18	ns
	t_r	$I_D=0.01A, V_{GEN}=-5\dots 7V$			90	
Turn-Off Time	$t_{d(off)}$	$R_G=6\Omega$			93	
	t_f	(Note 1,2)			210	






Notes:

1. Pulse Test: Pulse width $\leq 300\mu s$, Duty cycles $\leq 2\%$
2. Essentially independent of operating temperature


Typical Electrical and Thermal Characteristics (Curves)

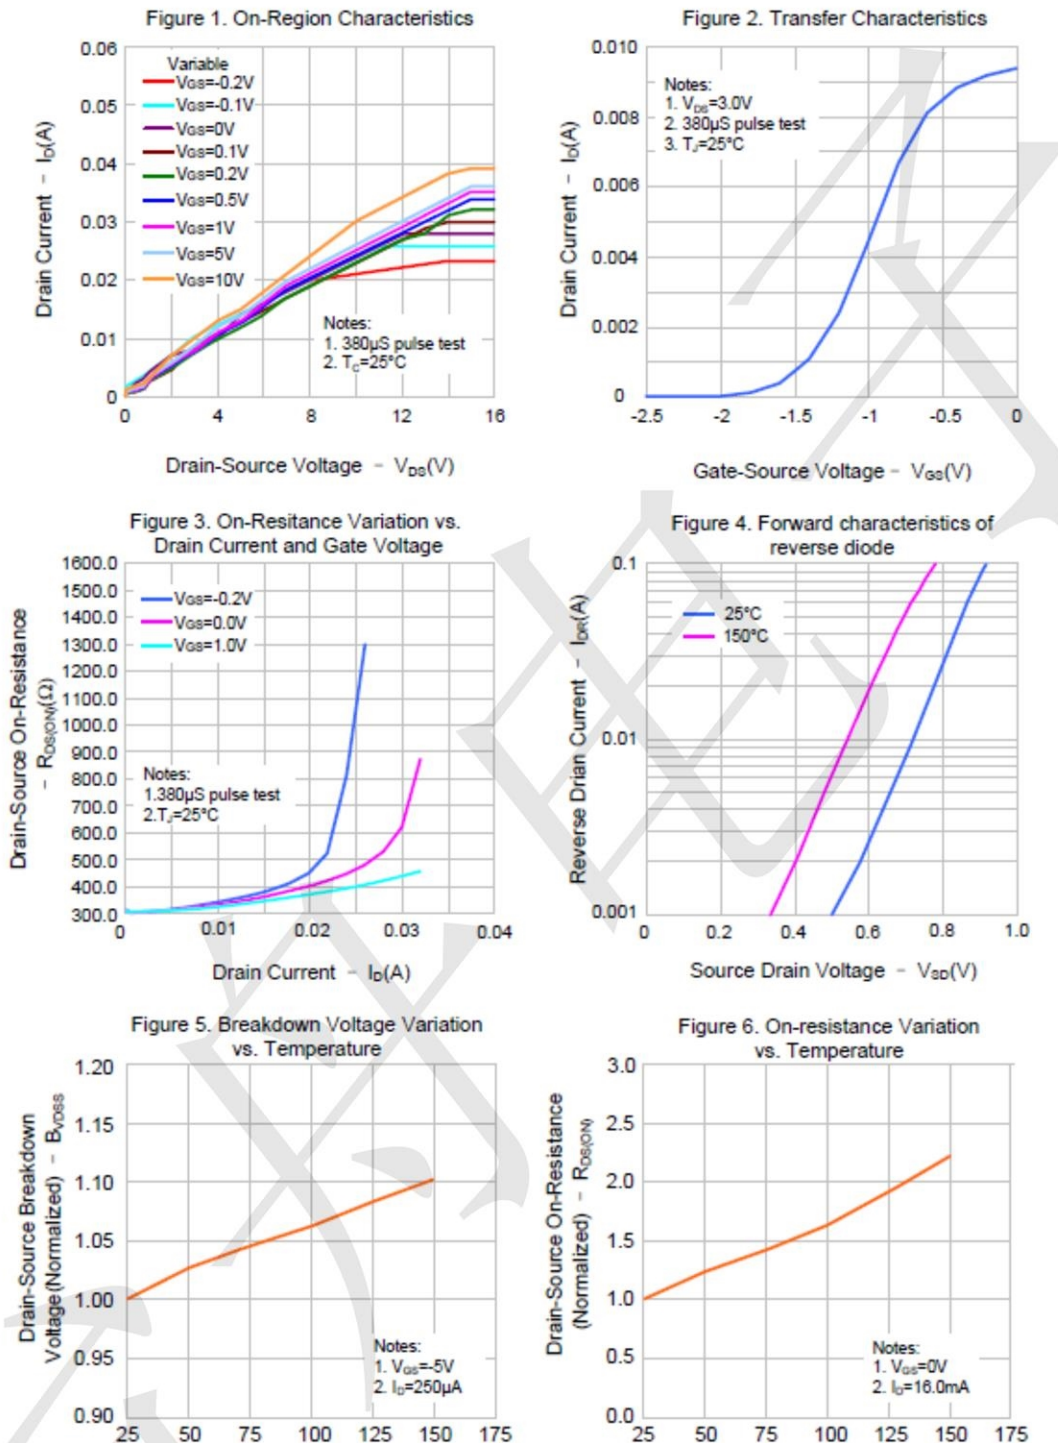

Typical Electrical and Thermal Characteristics (Curves)

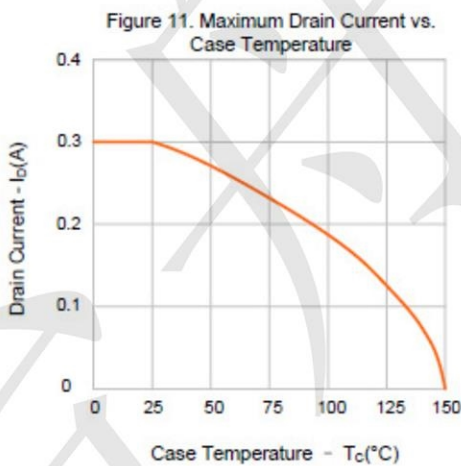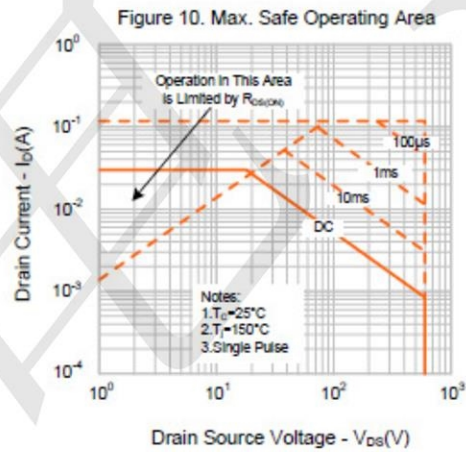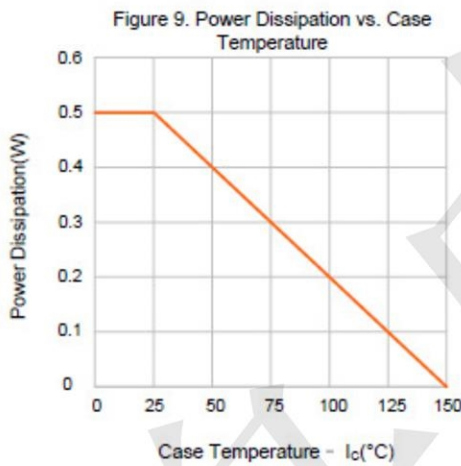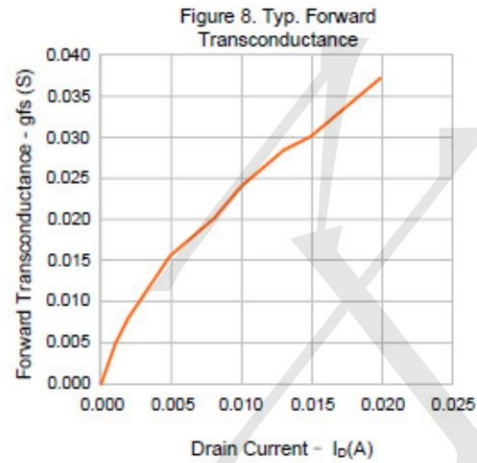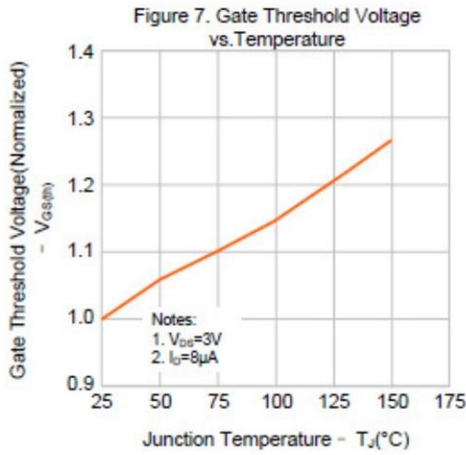

Package Outline Dimensions (SOT-23)

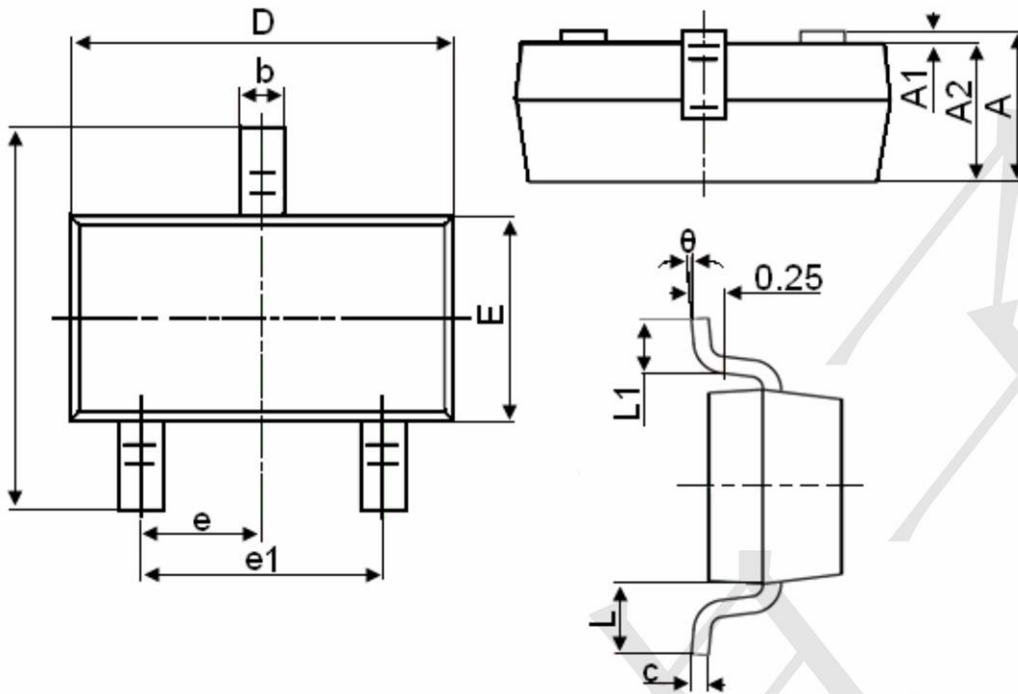

Symbol	Dimensions in Millimeters	
	MIN.	MAX.
A	0.900	1.150
A1	0.000	0.100
A2	0.900	1.050
b	0.300	0.500
c	0.080	0.150
D	2.800	3.000
E	1.200	1.400
E1	2.250	2.550
e	0.950TYP	
e1	1.800	2.000
L	0.550REF	
L1	0.300	0.500
θ	0°	8°

Notes

1. All dimensions are in millimeters.
2. Tolerance $\pm 0.10\text{mm}$ (4 mil) unless otherwise specified
3. Package body sizes exclude mold flash and gate burrs. Mold flash at the non-lead sides should be less than 5 mils.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [TECH PUBLIC](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [FCA20N60_F109](#) [FDZ595PZ](#) [AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#)
[405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#) [PSMN4R2-30MLD](#)
[TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#)
[NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-](#)
[7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [STU5N65M6](#) [C3M0021120D](#) [DMN13M9UCA6-7](#)
[BSS340NWH6327XTSA1](#) [MCM3400A-TP](#) [DMTH10H4M6SPS-13](#) [IRF40SC240ARMA1](#) [IPS60R1K0PFD7SAKMA1](#)
[IPS60R360PFD7SAKMA1](#) [IPS60R600PFD7SAKMA1](#)