

### Features

- ◆ 350W peak pulse power(8/20 $\mu$ s)
- ◆ Protects one bi-directional or two uni-directional lines
- ◆ Ultra low leakage: nA level
- ◆ Operating voltage: 3.3V
- ◆ Low clamping voltage
- ◆ Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test
    - Air discharge:  $\pm$ 30kV
    - Contact discharge:  $\pm$ 30kV
  - IEC61000-4-4 (EFT) 40A (5/50ns)
  - IEC61000-4-5 (Lightning) 20A (8/20 $\mu$ s)
- ◆ RoHS Compliant


### Mechanical Characteristics

- ◆ Package: SOT23-6
- ◆ Lead Finish: Matte Tin
- ◆ Case Material: “Green” Molding Compound.
- ◆ UL Flammability Classification Rating 94V-0
- ◆ Moisture Sensitivity: Level 3 per J-STD-020
- ◆ Shipping Qty :3000 /7Inch Tape & Reel

### Applications

- ◆ Mobile phone handsets
- ◆ Personal Digital Assistants (PDA)
- ◆ Portable handheld equipment (Laptop, Palmtop computers)
- ◆ Computer port, keyboard (USB1.1)

### Dimensions and Pin Configuration



**Marking:**




**Absolute Maximum Ratings** (Tamb=25°C unless otherwise specified)

| Parameter                       | Symbol | Value       | Unit |
|---------------------------------|--------|-------------|------|
| Peak Pulse Power (8/20μs)       | Ppk    | 350         | W    |
| Peak Pulse Current (8/20μs)     | IPP    | 20          | A    |
| ESD per IEC 61000-4-2 (Air)     | VESD   | ± 30        | kV   |
| ESD per IEC 61000-4-2 (Contact) |        | ± 30        |      |
| Operating Temperature Range     | TJ     | -55 to +125 | °C   |
| Storage Temperature Range       | Tstg   | -55 to +150 | °C   |


**Electrical Characteristics** (TA=25°C unless otherwise specified)

| Parameter               | Symbol | Min | Typ | Max | Unit | Test Condition             |
|-------------------------|--------|-----|-----|-----|------|----------------------------|
| Reverse Working Voltage | VRWM   |     |     | 3.3 | V    |                            |
| Breakdown Voltage       | VBR    | 5   | 5.6 | 7   | V    | IT = 1mA                   |
| Reverse Leakage Current | IR     |     |     | 0.1 | μA   | VRWM = 3.3V                |
| Forward Voltage         | VF     |     | 0.8 | 1.2 | V    | IF = 10mA                  |
| Clamping Voltage        | VC     |     | 7   |     | V    | IPP = 1A (8 x 20μs pulse)  |
| Clamping Voltage        | VC     |     |     | 15  | V    | IPP = 20A (8 x 20μs pulse) |
| Junction Capacitance    | CJ     |     |     | 200 | pF   | VR=0, f=1MHz, IO to GND    |


**Fig1. 8/20 $\mu$ s Pulse Waveform**

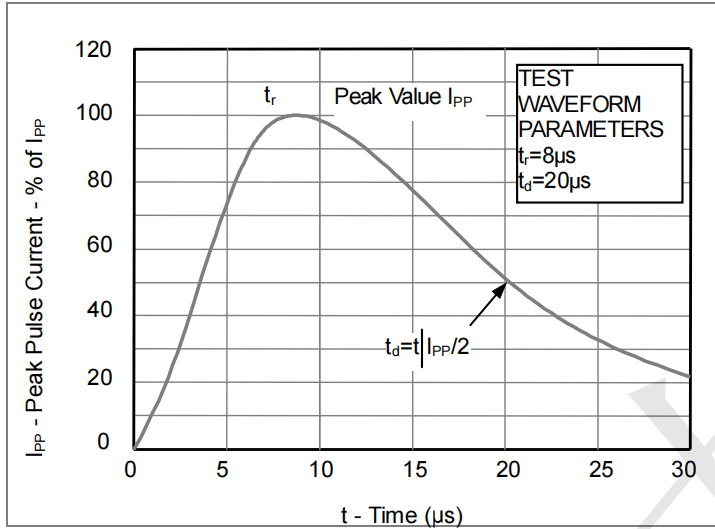



**Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)**

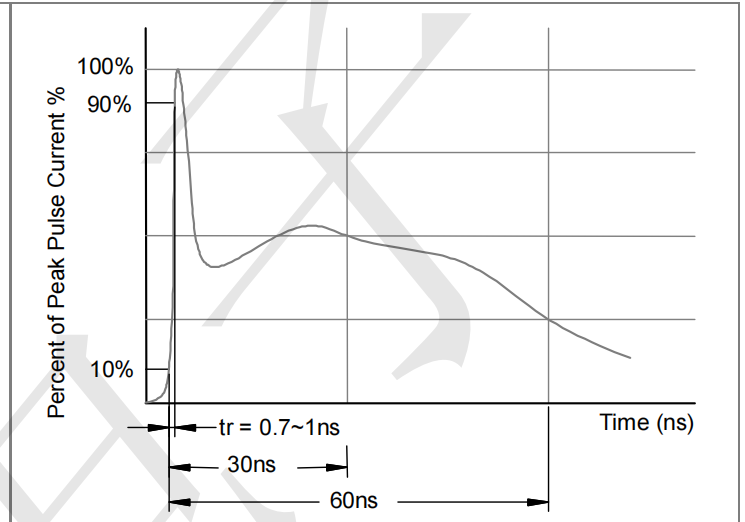

**Fig3. Power Derating Curve**

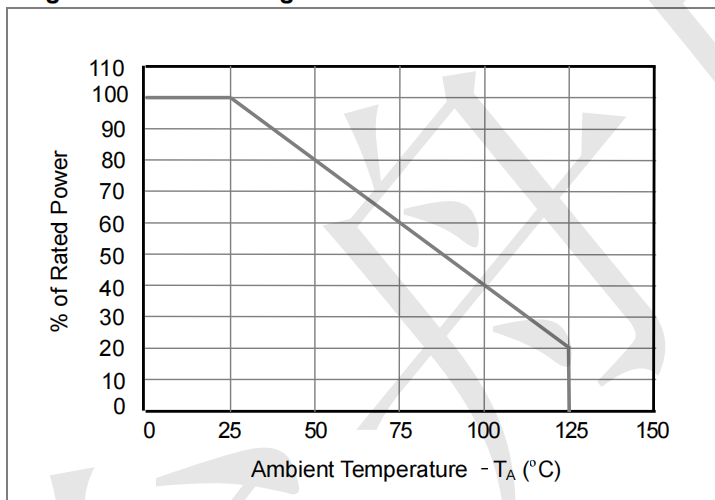


**Outline Drawing - SOT23-6**

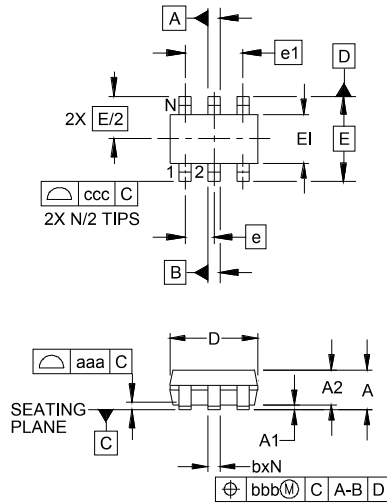

| DIM        | INCHES   |      |      | MILLIMETERS |      |      |
|------------|----------|------|------|-------------|------|------|
|            | MIN      | NOM  | MAX  | MIN         | NOM  | MAX  |
| A          | .035     | -    | .057 | 0.90        | -    | 1.45 |
| A1         | .000     | -    | .006 | 0.00        | -    | 0.15 |
| A2         | .035     | .045 | .051 | .90         | 1.15 | 1.30 |
| b          | .010     | -    | .020 | 0.25        | -    | 0.50 |
| c          | .003     | -    | .009 | 0.08        | -    | 0.22 |
| D          | .110     | .114 | .118 | 2.80        | 2.90 | 3.00 |
| E1         | .060     | .063 | .069 | 1.50        | 1.60 | 1.75 |
| E          | .110 BSC |      |      | 2.80 BSC    |      |      |
| e          | .037 BSC |      |      | 0.95 BSC    |      |      |
| e1         | .075 BSC |      |      | 1.90 BSC    |      |      |
| L          | .012     | .018 | .024 | 0.30        | 0.45 | 0.60 |
| L1         | (0.024)  |      |      | (0.60)      |      |      |
| N          | 6        |      |      | 6           |      |      |
| $\theta 1$ | 0°       | -    | 10°  | 0°          | -    | 10°  |
| aaa        | .004     |      |      | 0.10        |      |      |
| bbb        | .008     |      |      | 0.20        |      |      |
| ccc        | .008     |      |      | 0.20        |      |      |

**Land Pattern - SOT23-6**



| DIM | DIMENSIONS |             |
|-----|------------|-------------|
|     | INCHES     | MILLIMETERS |
| C   | (.098)     | (2.50)      |
| G   | .055       | 1.40        |
| P   | .037       | 0.95        |
| X   | .024       | 0.60        |
| Y   | .043       | 1.10        |
| Z   | .141       | 3.60        |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [TECH PUBLIC](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)  
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)  
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)  
[ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)  
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)  
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)