

**Features**

- Fast switching
- Green Device Available
- Suit for 1.5V Gate Drive Applications

**Application**

- Notebook
- Load Switch
- Networking
- Hand-held Instruments

**Package and Pin Configuration**


**Circuit diagram**

SOT363




Top View

Marking:

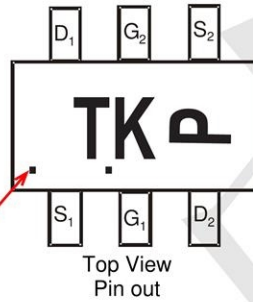

Top View  
Pin out

**PIN1**



**Absolute Maximum Ratings**  $T_c=25^\circ\text{C}$  unless otherwise noted

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	-20	V
$V_{GS}$	Gate-Source Voltage	$\pm 12$	V
$I_D$	Drain Current – Continuous ( $T_c=25^\circ\text{C}$ )	-1.1	A
$I_{DM}$	Drain Current – Pulsed <sup>1</sup>	-2.2	A
$P_D$	Power Dissipation ( $T_c=25^\circ\text{C}$ )	280	mW
	Power Dissipation – Derate above $25^\circ\text{C}$	2.5	mW/ $^\circ\text{C}$
$T_{STG}$	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
$T_J$	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

**Thermal Characteristics**

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	350	$^\circ\text{C}/\text{W}$

**Electrical Characteristics (T<sub>J</sub>=25 °C, unless otherwise noted)**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV <sub>DSS</sub>	Drain-Source Breakdown Voltage	V <sub>GS</sub> =0V, I <sub>D</sub> =-250uA	-20	---	---	V
ΔBV <sub>DSS</sub> /ΔT <sub>J</sub>	BV <sub>DSS</sub> Temperature Coefficient	Reference to 25°C, I <sub>D</sub> =-1mA	---	-0.01	---	V/°C
I <sub>DSS</sub>	Drain-Source Leakage Current	V <sub>DS</sub> =-20V, V <sub>GS</sub> =0V, T <sub>J</sub> =25°C	---	---	-1	uA
		V <sub>DS</sub> =-16V, V <sub>GS</sub> =0V, T <sub>J</sub> =125°C	---	---	-10	uA
I <sub>GSS</sub>	Gate-Source Leakage Current	V <sub>GS</sub> =±12V, V <sub>DS</sub> =0V	---	---	±20	uA

**On Characteristics**

R <sub>DS(on)</sub>	Static Drain-Source On-Resistance	V <sub>GS</sub> =-4.5V, I <sub>D</sub> =-0.5A	---	400		mΩ
		V <sub>GS</sub> =-2.5V, I <sub>D</sub> =-0.5A	---	550	680	
		V <sub>GS</sub> =-1.8V, I <sub>D</sub> =-0.1A	---	750	1050	
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>GS</sub> =V <sub>DS</sub> , I <sub>D</sub> =-250uA	-0.5	-0.7	1.0	V
ΔV <sub>GS(th)</sub>	V <sub>GS(th)</sub> Temperature Coefficient		---	3	---	mV/°C

**Dynamic and switching Characteristics**

Q <sub>g</sub>	Total Gate Charge <sup>2,3</sup>	V <sub>DS</sub> =-10V, V <sub>GS</sub> =-4.5V, I <sub>D</sub> =-1A	---	0.5		nC
Q <sub>gs</sub>	Gate-Source Charge <sup>2,3</sup>		---	0.28		
Q <sub>gd</sub>	Gate-Drain Charge <sup>2,3</sup>		---	0.28		
T <sub>d(on)</sub>	Turn-On Delay Time <sup>2,3</sup>	V <sub>DD</sub> =-10V, V <sub>GS</sub> =-4.5V, R <sub>G</sub> =6Ω I <sub>D</sub> =-1A	---	0.4		ns
T <sub>r</sub>	Rise Time <sup>2,3</sup>		---	0.06		
T <sub>d(off)</sub>	Turn-Off Delay Time <sup>2,3</sup>		---	0.02		
T <sub>f</sub>	Fall Time <sup>2,3</sup>		---	0.8		
C <sub>iss</sub>	Input Capacitance	V <sub>DS</sub> =-10V, V <sub>GS</sub> =0V, F=1MHz	---	55		pF
C <sub>oss</sub>	Output Capacitance		---	6		
C <sub>rss</sub>	Reverse Transfer Capacitance		---	4.5		

**Drain-Source Diode Characteristics and Maximum Ratings**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V <sub>SD</sub>	Diode Forward Voltage	V <sub>GS</sub> =0V, I <sub>S</sub> =-0.2A, T <sub>J</sub> =25°C	---	-0.75	-1.1	V

## Characteristic Curves

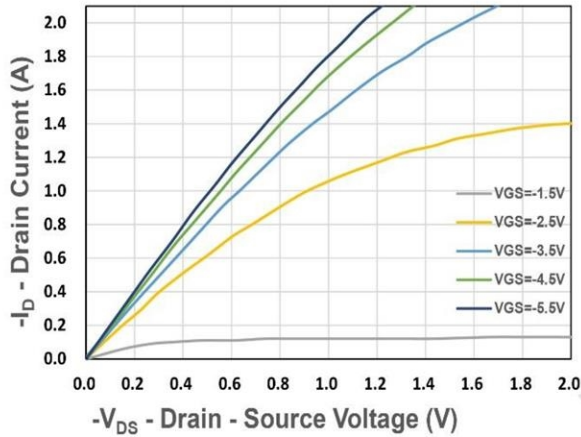


Figure 1. Output Characteristics

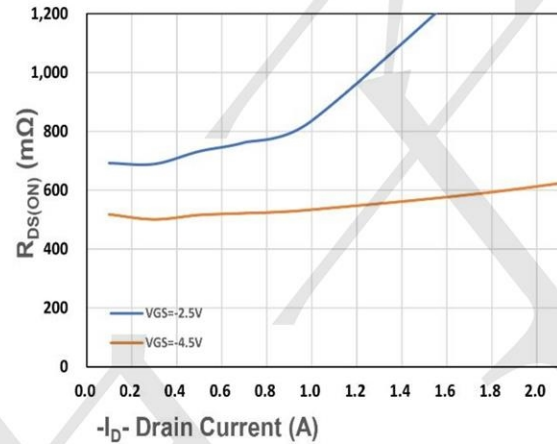


Figure 2. On-Resistance vs. ID

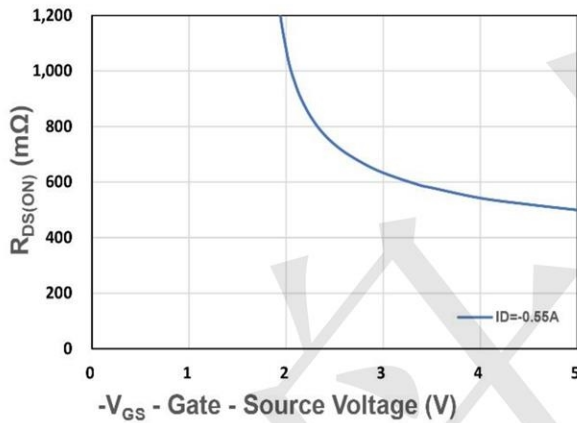


Figure 3. On-Resistance vs. VGS

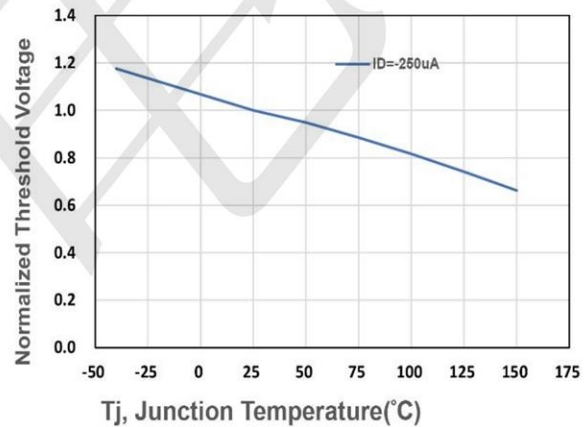


Figure 4. Gate Threshold Voltage

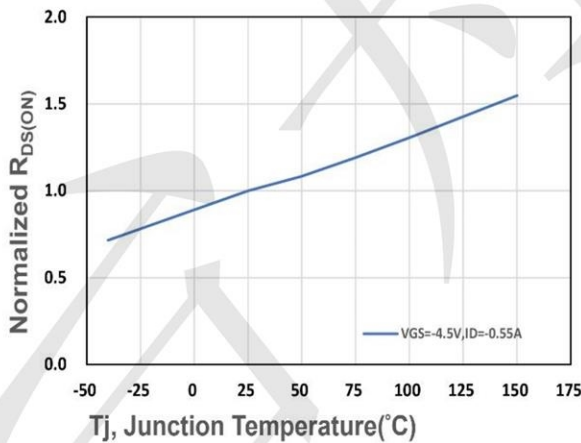


Figure 5. Drain-Source On Resistance

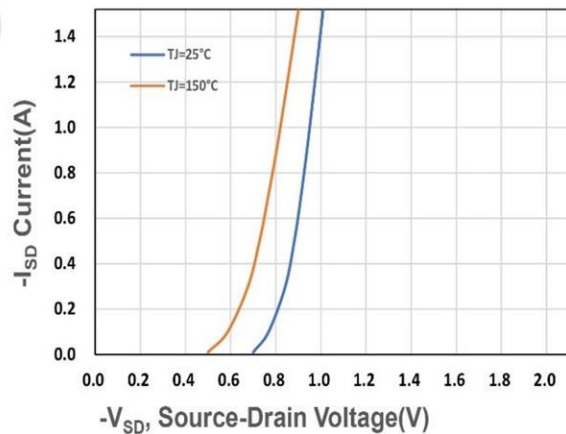


Figure 6. Source-Drain Diode Forward

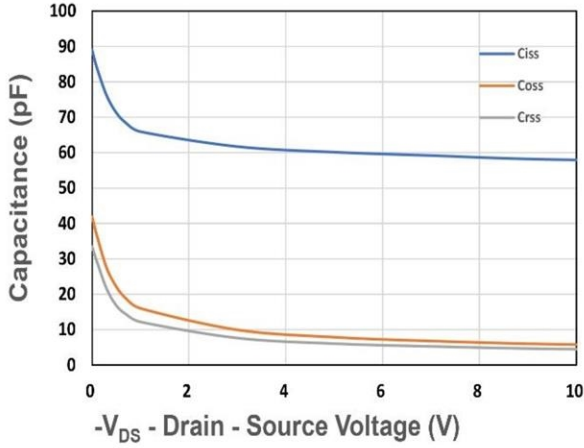


Figure 7. Capacitance

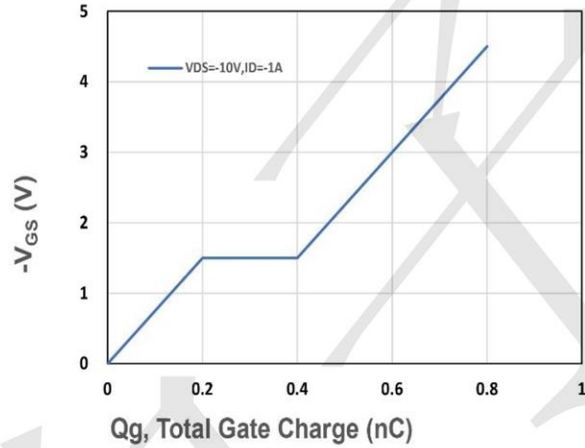


Figure 8. Gate Charge Characteristics

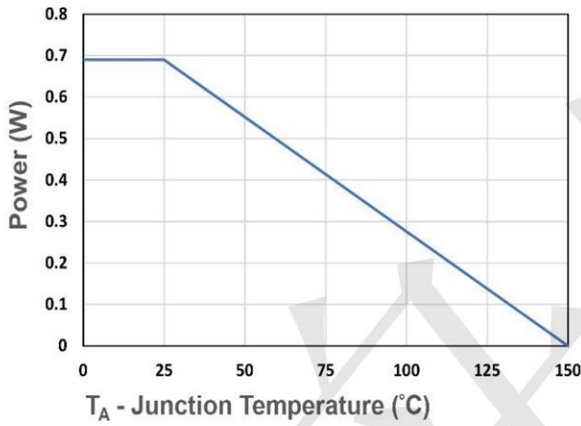


Figure 9. Power Dissipation

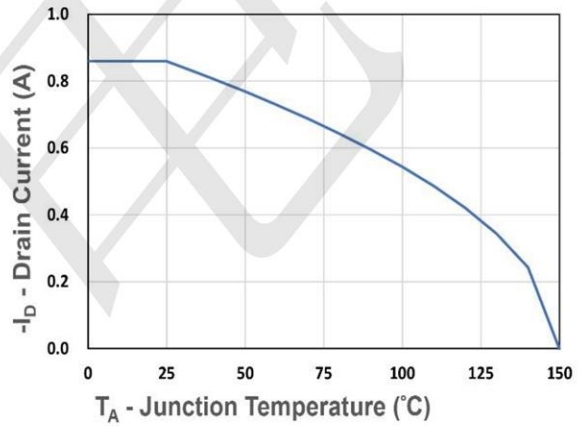


Figure 10. Drain Current

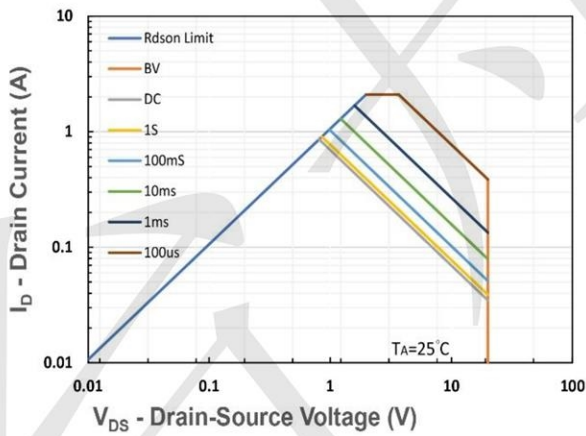


Figure 11. Safe Operating Area


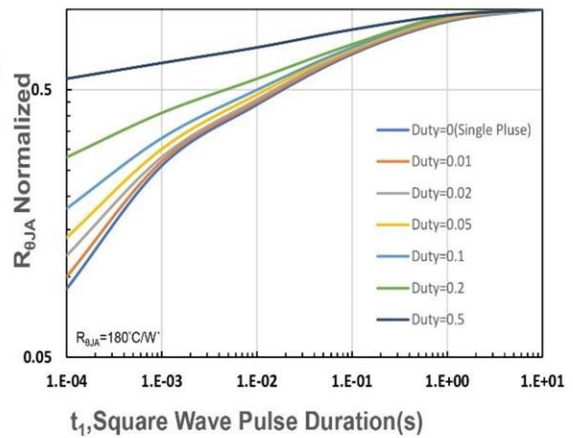



Figure 12.  $R_{\theta JA}$  Transient Thermal Impedance

**Outline Drawing - SOT-363(2.0X2.1)**

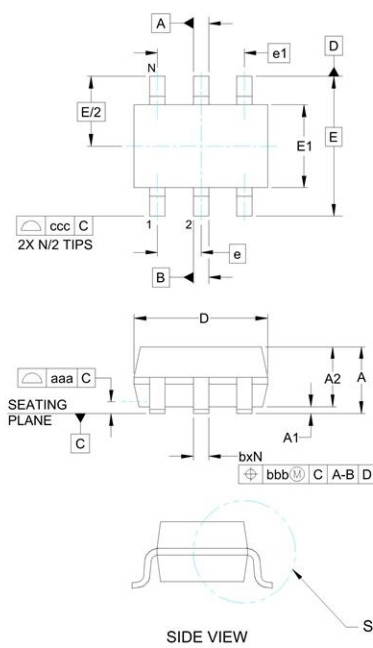


DIM	INCHES		MILLIMETERS	
	MIN	NOM	MAX	MIN NOM MAX
A	-	-	.043	- - 1.10
A1	.000	-	.004	0.00 - 0.10
A2	.028	.035	.039	0.70 0.90 1.00
b	.006	-	.012	0.15 - 0.30
c	.003	-	.009	0.08 - 0.22
D	.071	.079	.087	1.80 2.00 2.20
E1	.045	.049	.053	1.15 1.25 1.35
E	.083 BSC		2.10 BSC	
e	.026 BSC		0.65 BSC	
e1	.051		1.30 BSC	
L	.010	.014	.018	0.26 0.36 0.46
L1	(0.17)		(0.42)	
N	6		6	
01	0°	-	8°	0° - 8°
aaa	.004		0.10	
bbb	.004		0.10	
ccc	.012		0.30	

**Land Pattern - SOT-363**



DIMENSIONS		
DIM	INCHES	MILLIMETERS
C	(.073)	(1.85)
G	.039	1.00
P	.026	0.65
X	.016	0.40
Y	.033	0.85
Z	.106	2.70


**SOT-363 Embossed Carrier Tape**

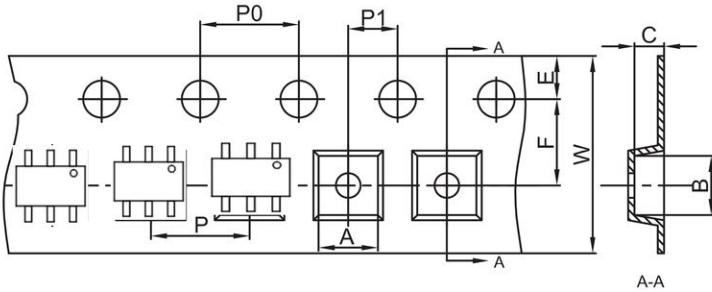

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-363	2.25	2.55	1.20	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00


**SOT-363 Tape Leader and Trailer**

Package orientation in reel

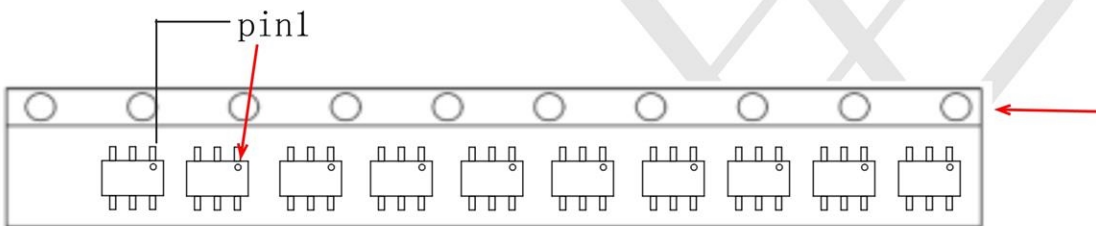

Shipping: 3000 pcs / Tape & Reel

**SOT-363 Reel**

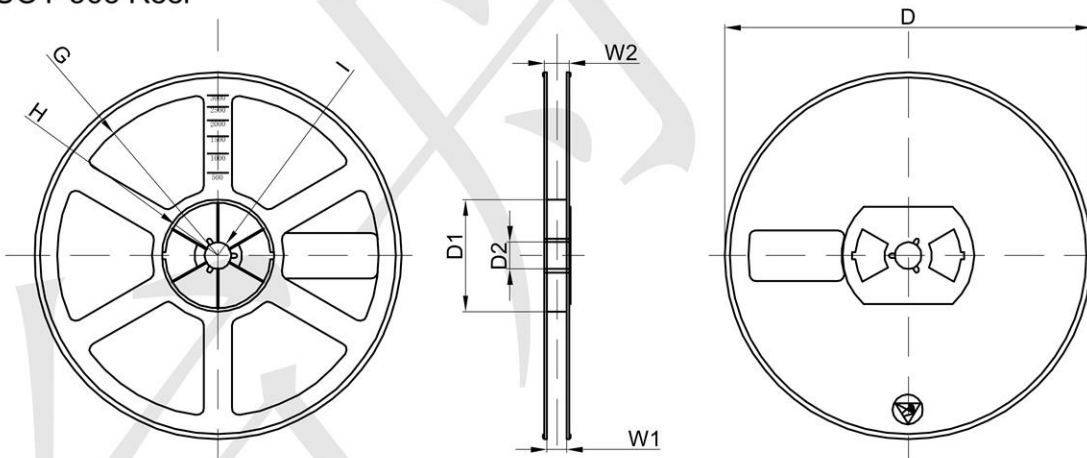

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	203×203×195	180,000 pcs	438×438×220	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [TECH PUBLIC](#) manufacturer:*

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [NTNS3A92PZT5G](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#)  
[AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#)  
[IPS70R2K0CEAKMA1](#) [BSF024N03LT3 G](#) [PSMN4R2-30MLD](#) [TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#)  
[EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMC2700UDMQ-7](#)  
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#)  
[DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [IPSA70R950CEAKMA1](#) [IPSA70R2K0CEAKMA1](#) [STU5N65M6](#)  
[C3M0021120D](#)