

## Features

- ◆ Ultra low capacitance: 0.3pF typical (I/O to I/O)
- ◆ Ultra low leakage: nA level
- ◆ Low operating voltage: 5V
- ◆ Low clamping voltage
- ◆ Up to 4 data lines and one power line protects
- ◆ Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test  
Air discharge:  $\pm 25\text{kV}$   
Contact discharge:  $\pm 20\text{kV}$
  - IEC61000-4-4 (EFT) 40A (5/50ns)
  - IEC61000-4-5 (Lightning) : 4.5A(8/20 $\mu\text{s}$ )
- ◆ ROHS Compliant



## Mechanical Characteristics

- ◆ Package: DFN2710-8(2.5× 1.0× 0.5mm)
- ◆ Ultra low leakage: nA level
- ◆ Case Material: “Green” Molding Compound.
- ◆ UL Flammability Classification Rating 94V-0
- ◆ Moisture Sensitivity: Level 3 per J-STD-020
- ◆ Terminal Connections: See Diagram Below
- ◆ Shipping Qty :3000pcs/7Inch Tape & Reel


## Applications

- ◆ High Definition Multimedia Interface (HDMI)
- ◆ Digital Visual Interface (DVI)
- ◆ Unified Display Interface (UDI)
- ◆ MDDI Ports
- ◆ PCI Express
- ◆ Serial ATA

## Dimensions and Pin Configuration

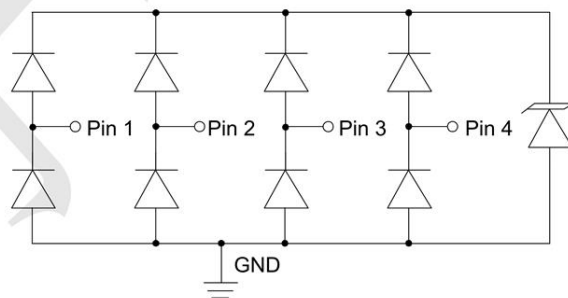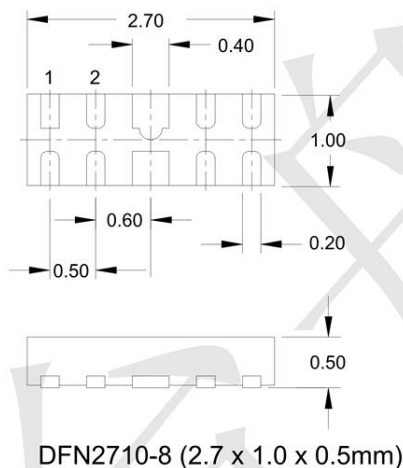

## Marking:



**xxyy=date code**

**Absolute Maximum Ratings** (Tamb=25°C unless otherwise specified)

| Parameter                       | Symbol | Value       | Unit |
|---------------------------------|--------|-------------|------|
| Peak Pulse Power (8/20μs)       | Ppk    | 120         | W    |
| Peak Pulse Current (8/20μs)     | IPP    | 4.5         | A    |
| ESD per IEC 61000-4-2 (Air)     | VESD   | ± 25        | kV   |
| ESD per IEC 61000-4-2 (Contact) |        | ± 20        |      |
| Operating Temperature Range     | TJ     | -55 to +125 | °C   |
| Storage Temperature Range       | Tstg   | -55 to +150 | °C   |

**Electrical Characteristics** (TA=25°C unless otherwise specified)

| Parameter               | Symbol | Min | Typ | Max | Unit | Test Condition                                   |
|-------------------------|--------|-----|-----|-----|------|--|
| Reverse Working Voltage | VRWM   |     |     | 5   | V    | Any I/O pin to ground                            |
| Breakdown Voltage       | VBR    | 6   |     |     | V    | IT = 1mA, any I/O pin to ground                  |
| Reverse Leakage Current | IR     |     |     | 0.1 | μA   | VRWM = 5V, any I/O pin to ground                 |
| Clamping Voltage        | VC     |     |     | 10  | V    | IPP = 1A (8 x 20μs pulse), any I/O pin to ground |
| Clamping Voltage        | VC     |     |     | 15  | V    | IPP = 4A (8 x 20μs pulse), any I/O pin to ground |
| Junction Capacitance    | CJ     |     |     | 0.8 | pF   | VR = 0V, f = 1MHz, any I/O pin to ground         |
| Junction Capacitance    | CJ     |     | 0.3 | 0.4 | pF   | VR = 0V, f = 1MHz, between I/O pins              |

## Characteristic Curves

Fig1. 8/20 $\mu$ s Pulse Waveform

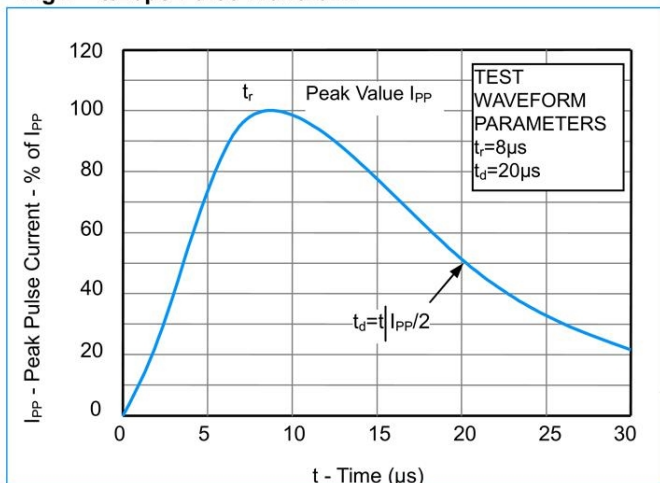


Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)






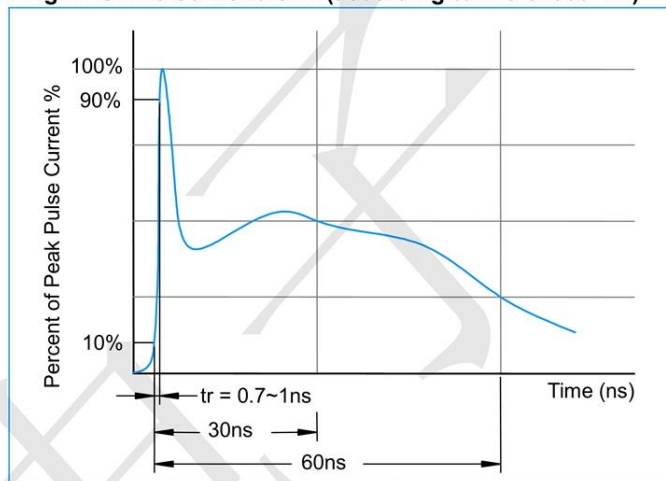


Fig3. Non - Repetitive Peak Pulse Power vs. Pulse Time

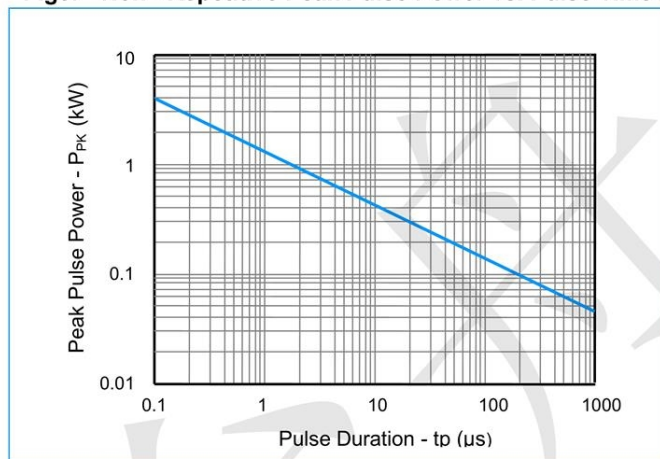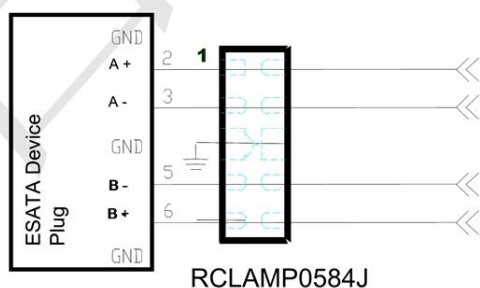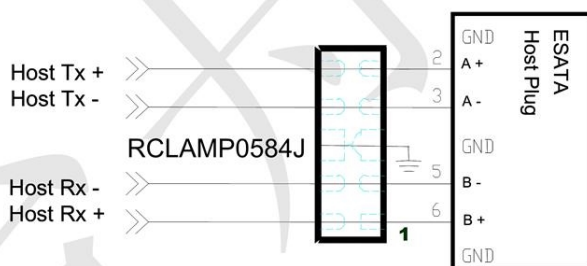


## Application Information

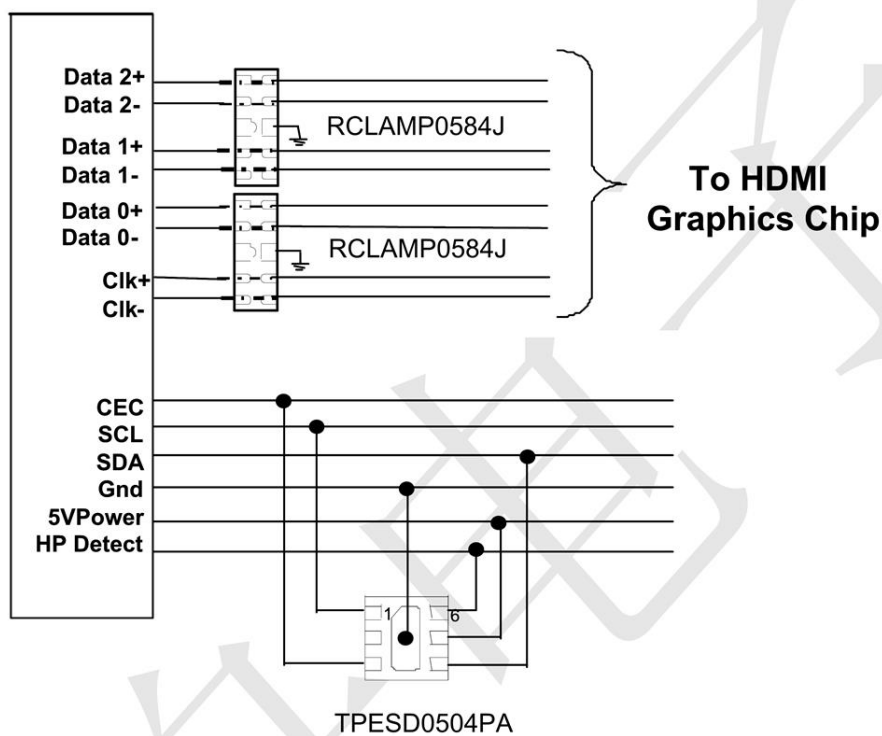


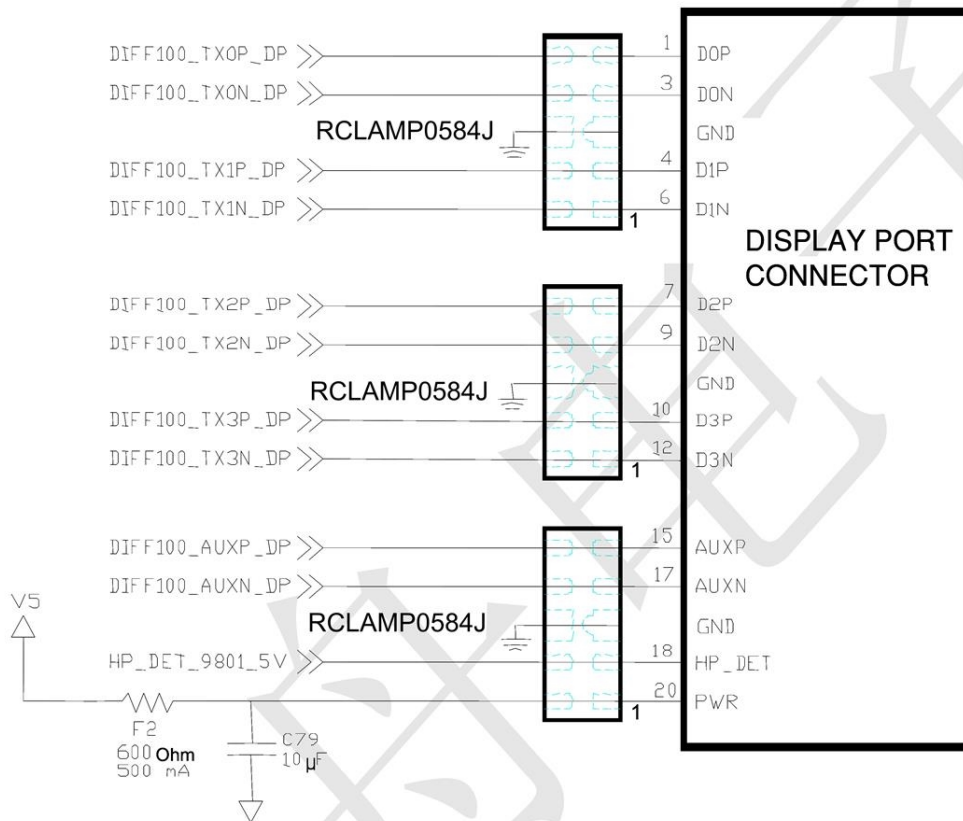

**Outline Drawing - DFN2710-8**

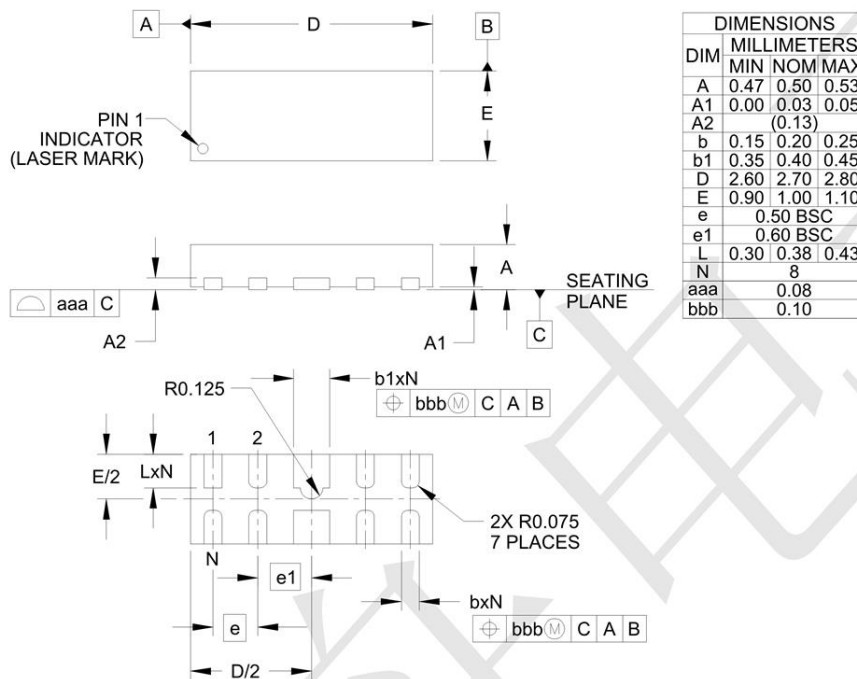

**Land Pattern - DFN2710-8**

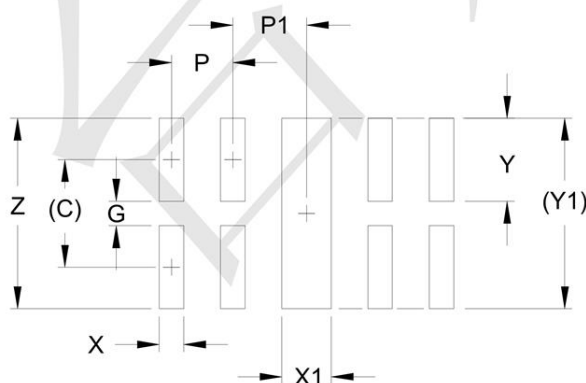

| DIMENSIONS |        |             |
|------------|--------|-------------|
| DIM        | INCHES | MILLIMETERS |
| C          | (.034) | (0.875)     |
| G          | .008   | 0.20        |
| P          | .020   | 0.50        |
| P1         | .024   | 0.60        |
| X          | .008   | 0.20        |
| X1         | .016   | 0.40        |
| Y          | .027   | 0.675       |
| Y1         | (.061) | (1.55)      |
| Z          | .061   | 1.55        |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [TECH PUBLIC](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)  
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#)  
[CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [MMAD1108/TR13](#)  
[5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#) [5KP90A](#) [5KP90CA](#)