

Features

- 2 μ A Ground Current at no Load
- $\pm 2\%$ Output Accuracy
- 600mA Output Current
- 10nA Disable Current (by option)
- Wide Operating Input Voltage Range: 1.2V to 5.5V
- Dropout Voltage: 0.32V at 600mA/ V_{OUT} 3.3V
- Support Fixed Output Voltage 1.2V, 1.5V, 1.6V, 1.8V, 2.5V, 2.8V, 3.0V, 3.3V
- Stable with Ceramic or Tantalum Capacitor
- Current Limit Protection
- Over Temperature Protection
- SOT23-5 Packages

Applications

- Portable, Battery Powered Equipment
- Low Power Microcontrollers
- Laptop, Palmtops and PDAs
- Wireless Communication Equipment
- Audio/Video Equipment
- Car Navigation Systems

General Description


The RT9080 series are a group of low-dropout (LDO) voltage regulators offering the benefits of wide input voltage range from 1.2V to 5.5V, low dropout voltage, low power consumption, and miniaturized packaging. Quiescent current of only 2 μ A makes these devices ideal for powering the battery-powered, always-on systems that require very little idle-state power dissipation to a longer service life. There is an option of

shutdown mode by selecting the parts with the EN pin and pulling it low. The shutdown current in this mode goes down to only 10nA (typical).


The RT9080 series of linear regulators are stable with the ceramic output capacitor over its wide input range from 1.2V to 5.5V and the entire range of output load current (0mA to 600mA).

Ordering Information

RT9080-33GJ5

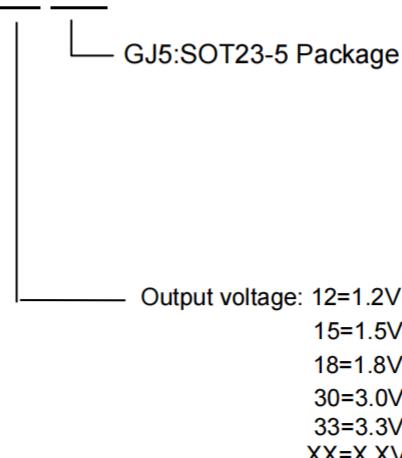

PIN CONFIGURATION



Typical Application Circuit

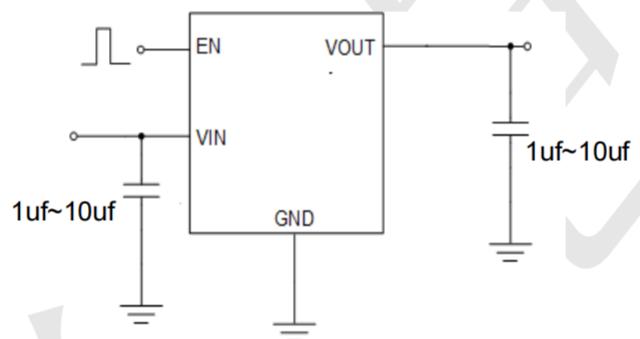


Figure 2: Application circuit of Fixed V_{OUT} LDO with enable function

ABSOLUTE MAXIMUM RATINGS

VIN Pin to GND Pin Voltage	-0.3V to 6.5V
VOUT Pin and EN Pin Voltage	-0.3V to 6V
VOUT Pin to VIN Pin Voltage	-6V to 0.3V
Storage Temperature Range	-60°C~150°C
Lead Temperature (Soldering, 10 sec)	260°C
Junction Temperature	150°C
Operating Ambient Temperature Range T_A	-40°C~85°C
Thermal Resistance Junction to Case, $R_{\theta JC}$	SOT23-3 115°C/W SOT23-5 115°C/W DFN-4(1x1) 65°C/W DFN-6(2x2) 30°C/W
Thermal Resistance Junction to Ambient, $R_{\theta JA}$	SOT23-3 250°C/W SOT23-5 250°C/W DFN-4(1x1) 195°C/W DFN-6(2x2) 165°C/W

Electrical Characteristics (TA=25°C unless otherwise noted)

(VIN =5V, VEN = 5V TA=25°C unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit	
Supply Voltage	VIN		1.2	--	5.5	V	
DC Output Voltage Accuracy		ILOAD =0.1mA	-2		2	%	
Dropout Voltage (ILOAD =600mA) (Note 3)	VDROP_3V	VOUT ≥ 3V		0.32		V	
	VDROP_2.8V	VOUT = 2.8V		0.36			
	VDROP_2.5V	VOUT = 2.5V		0.36			
	VDROP_1.8V	VOUT = 1.8V		0.57			
	VDROP_1.5V	VOUT = 1.5V		0.71			
	V	V = 1.2V		0.8			
Ground Current	IQ	ILOAD = 0mA		2		μA	
Shutdown Ground Current	ISD	VEN = 0V,		0.01	0.5	μA	
VOUT Shutdown Leakage Current	ILEAK	VOUT = 0V		0.01	0.5		
Enable Threshold Voltage	VIH	EN Rising			2	V	
	UIL	EN Falling	0.6				
EN Input Current	IEN	VEN = 5V		10	100	nA	
Line Regulation	ΔLINE	ILOAD =30mA, 1.5V ≤ VIN ≤ 5.5V or (VOUT + 0.2V) ≤ VIN ≤ 5.5V		0.2		%	
Load Regulation	ΔLOAD	10mA ≤ ILOAD ≤ 0.3A		0.2		%	
Output Current Limit	ILIM	VOUT =0	601	1100		mA	
Power Supply Rejection Ratio (ILOAD =5mA)	PSRR	VOUT =1.2V, VIN = 2V	f = 100Hz	--	80	--	dB
			f = 1kHz	--	75	--	
Output Voltage Noise (BW = 10Hz to 100kHz, COUT =1μF,)		VIN = 3.5V ILOAD =0.1A	VOUT =0.9V	--	40	--	μVRMS
			VOUT =2.8V	--	50	--	
Thermal Shutdown Temperature	TSD	ILOAD =10mA	--	155	--	°C	
Thermal Shutdown Hysteresis	ΔTSD		--	15	--	°C	
Discharge Resistance		EN = 0V , VOUT = 0.1V	--	100	--	Ω	

Note 1. Stresses beyond those listed “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions may affect device reliability.

Note 2. θ_{JA} is measured at $T_A = 25^\circ\text{C}$ on a TECH PUBLICboard.

Note 3. $V_{\text{DROP}} = V_{\text{IN}} - V_{\text{OUT}}$ when the V_{OUT} is 98% of its target value.

Typical Characteristics

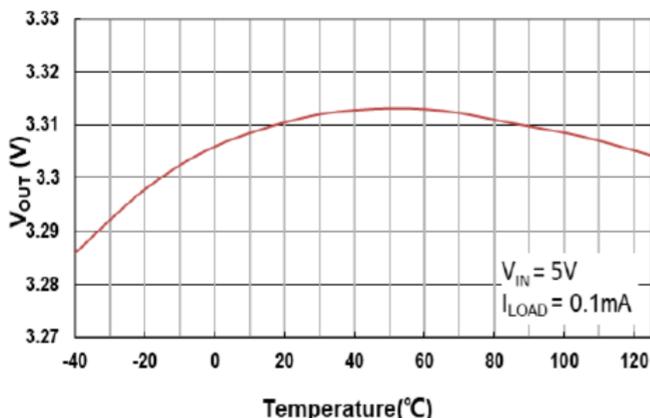


Fig. 5 Output Voltage vs. Temperature

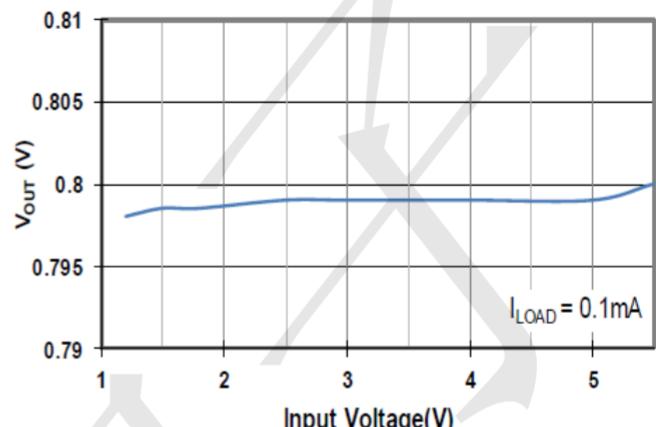


Fig. 6 Output Voltage vs. Input Voltage

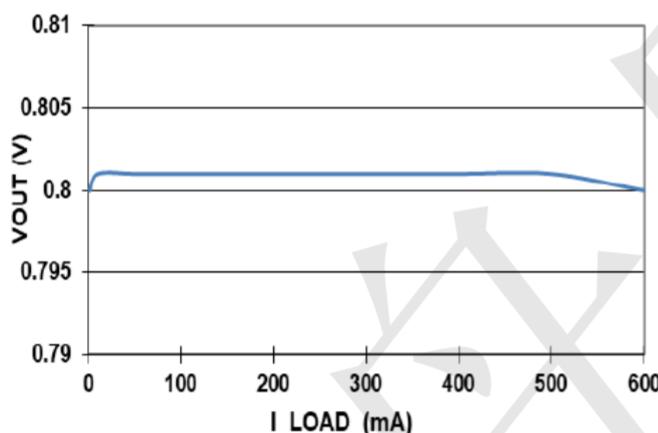


Fig. 7 Output Voltage vs. Load Current

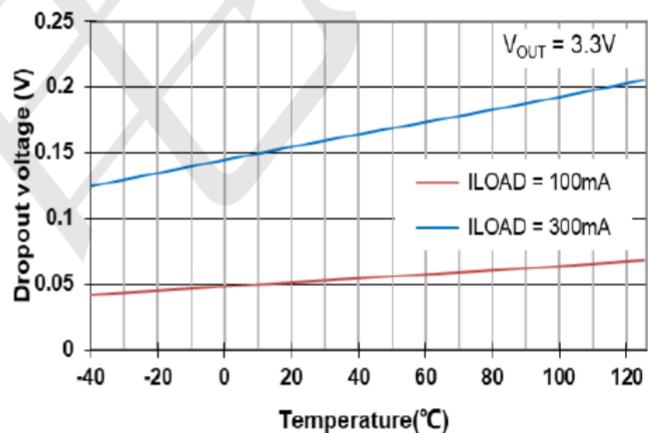


Fig. 8 Dropout Voltage vs. Temperature

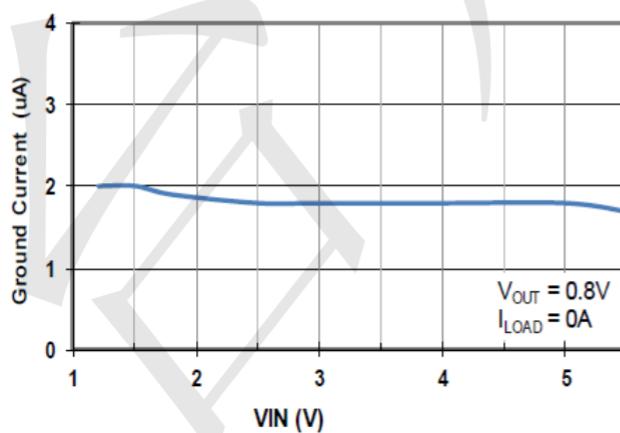


Fig. 9 Ground Current vs. Input Voltage






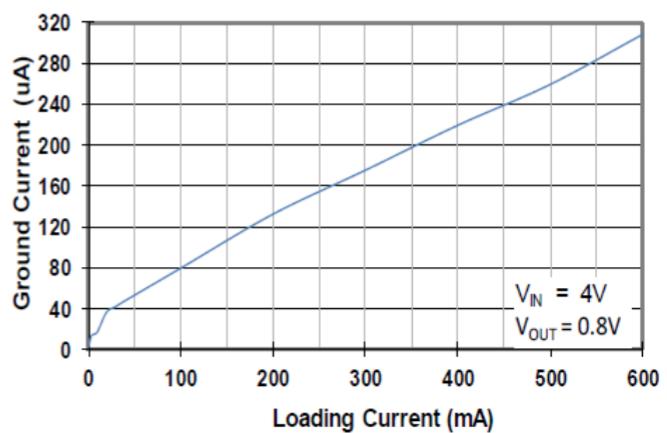



Fig. 10 Ground Current vs. Loading Current

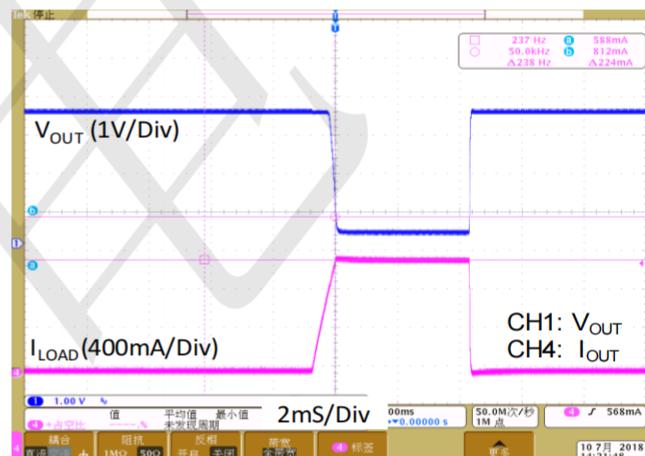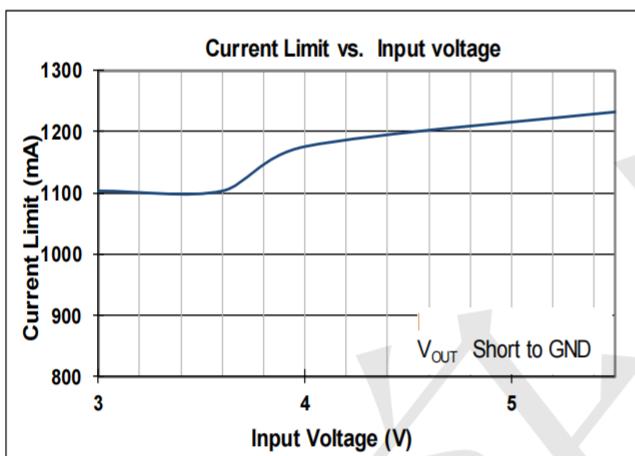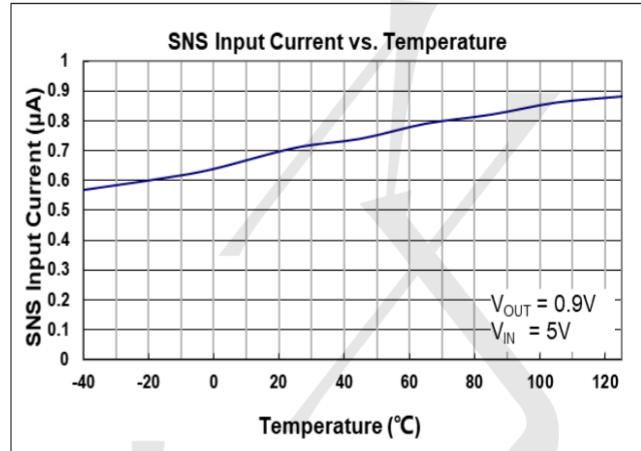
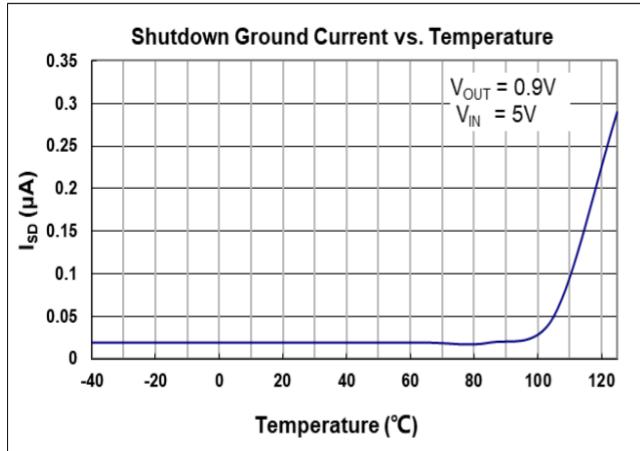


Load Transient Response I

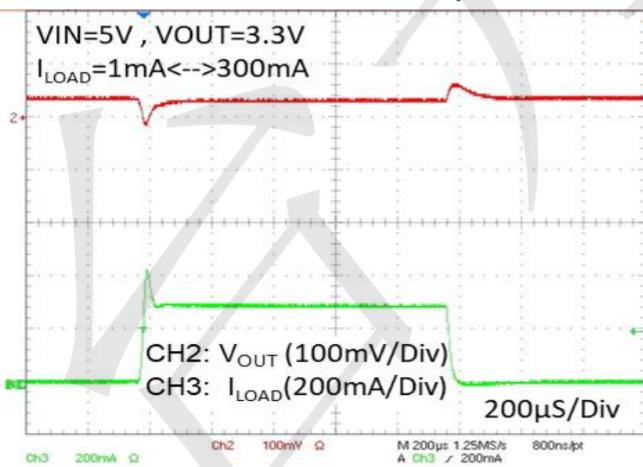


Load Transient Response II

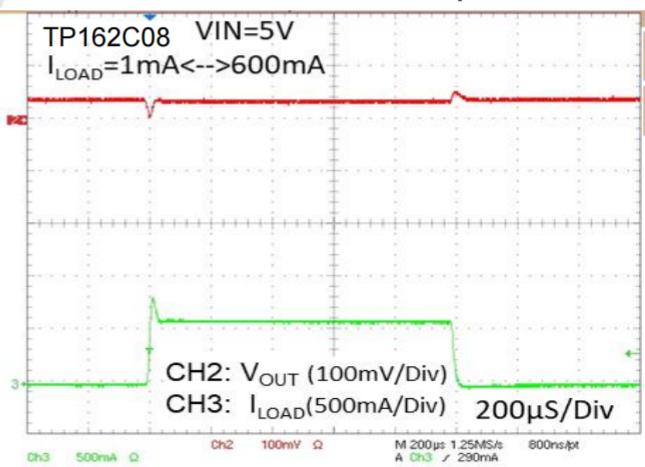


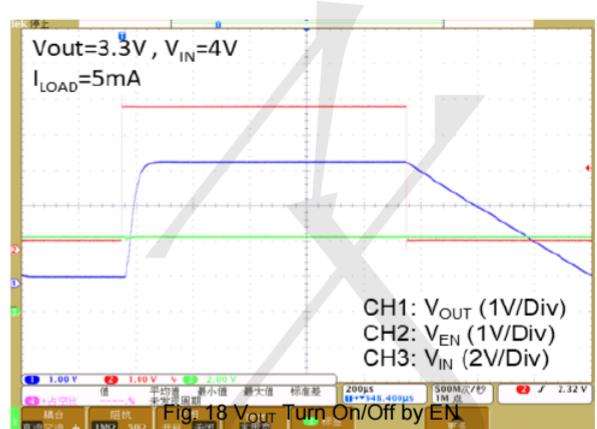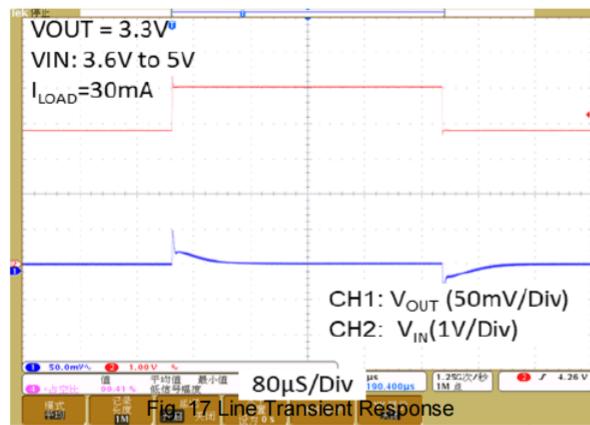

BLOCK DIAGRAM

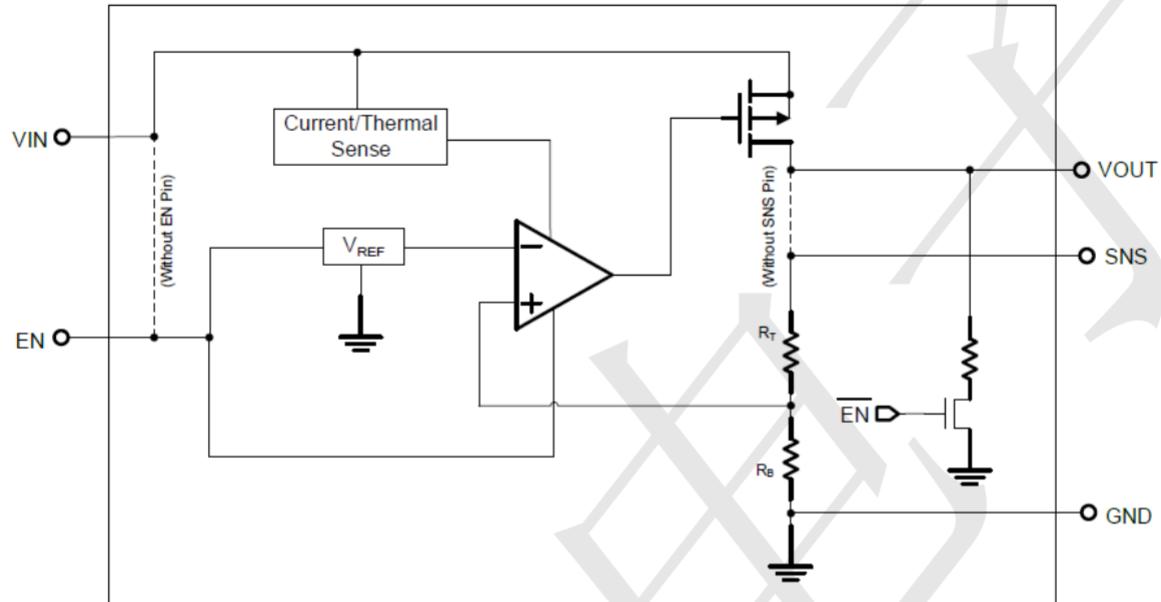

Package information
SOT23-5

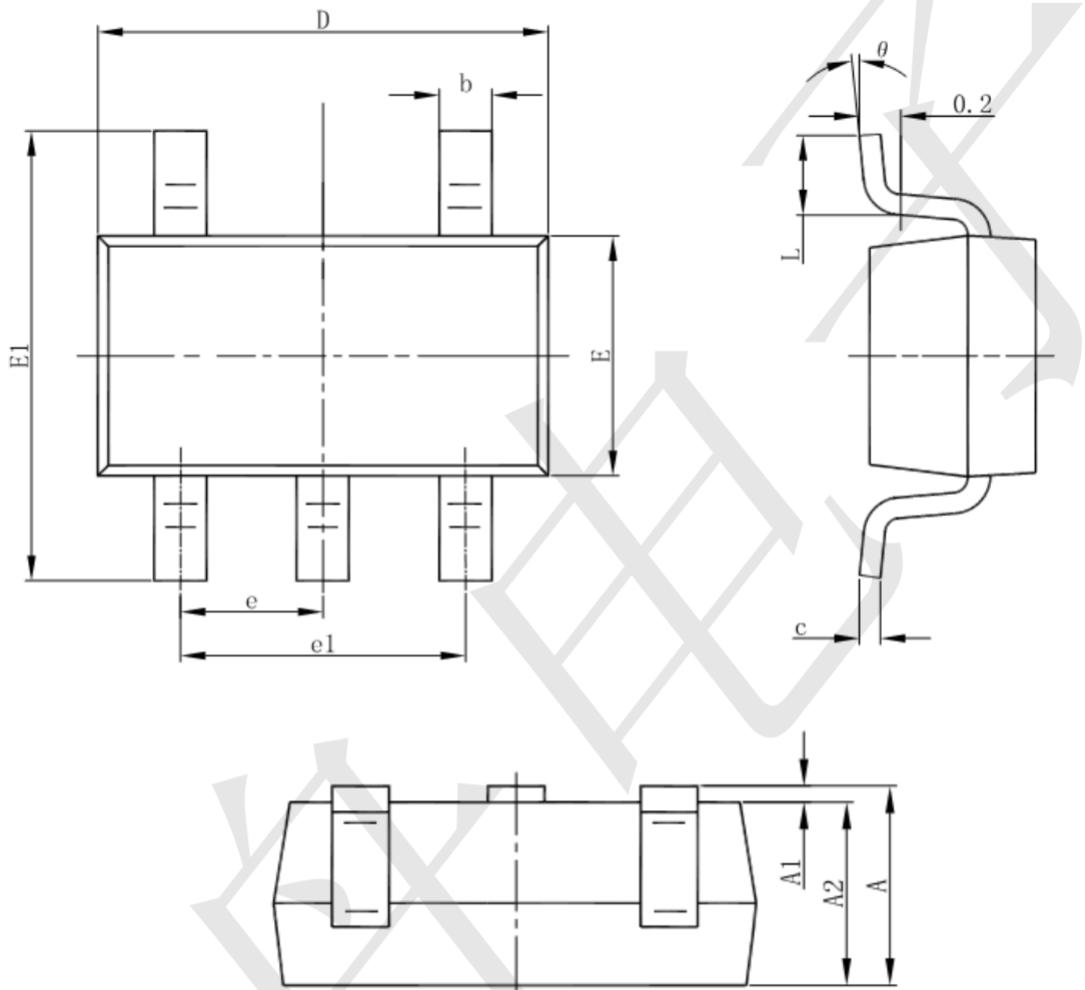

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [TECH PUBLIC](#) manufacturer:

Other Similar products are found below :

[LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [714954EB](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L79M05T-E](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [ZTS6538SE](#) [UA78L09CLP](#) [UA78L09CLPR](#) [CAT6221-PPTD-GT3](#) [MC78M09CDTRK](#) [NCV51190MNTAG](#) [78M05](#) [HT7150-1](#) [UM1540DB-18](#) [XC6234H281VR-G](#) [WL2834CA-6/TR](#) [TPL730F33-5TR](#) [TLS850F1TA V50](#) [TPS549B22RVFR](#) [UM1540DB-33](#) [WL9200P3-50B](#) [WL9100P3-33B](#) [WL9005D4-33](#) [XC6219B152MR](#) [WL2855K33-3/TR](#) [PJ54BM33SE](#) [PJ9500M25SA](#) [MD7218E33PC1](#) [H7533-2PR](#) [SK7812AU](#) [SD1A30](#) [78L33](#) [TP78L33T3](#) [L78L33ACUTR](#) [SK6513ST3A-50](#) [SK6054D4-09](#) [SK6054D4-18](#) [SK6054D4-11](#) [SK6054D4-10](#) [LM79L12F](#)