

## Features

- \* 350W peak pulse power (8/20 $\mu$ s)
- \* Low operating :24V
- \* Ultra low capacitance: 0.8 pF typical
- \* Ultra low leakage: nA level
- \* Low clamping voltage
- \* Protects one power line or data line
- \* Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test  
Air discharge:  $\pm$ 30kV  
Contact discharge:  $\pm$ 30kV
  - IEC61000-4-5 (Lightning) 6A (8/20 $\mu$ s)
  - IEC61000-4-4 (EFT) 40A (5/50ns)
- \* RoHS Compliant


## Mechanical Characteristics

- \* Package: SOD-323
- \* Ultra low leakage: nA level
- \* Case Material: “Green” Molding Compound.
- \* UL Flammability Classification Rating 94V-0
- \* Moisture Sensitivity: Level 3 per J-STD-020
- \* Shipping Qty :3000pcs/7Inch Tape & Reel

## Applications

- \* Ethernet 10/100/1000 Base T
- \* SMART Phones
- \* Handheld - Wireless Systems
- \* Portable Instrumentation
- \* USB Interface

## Dimensions and Pin Configuration




**Marking:U24**

**Absolute Maximum Ratings** (Tamb=25°C unless otherwise specified)

| Parameter                       | Symbol | Value       | Unit |
|---------------------------------|--------|-------------|------|
| Peak Pulse Power (8/20μs)       | Ppk    | 350         | W    |
| Peak Pulse Current (8/20μs)     | IPP    | 6           | A    |
| ESD per IEC 61000-4-2 (Air)     | VESD   | ±30         | kV   |
| ESD per IEC 61000-4-2 (Contact) |        | ±30         |      |
| Operating Temperature Range     | TJ     | -55 to +125 | °C   |
| Storage Temperature Range       | Tstg   | -55 to +150 | °C   |

**Electrical Characteristics** (TA=25°C unless otherwise specified)


| Symbol    | Parameter                           |
|-----------|-------------------------------------|
| $V_{RWM}$ | Nominal Reverse Working Voltage     |
| $I_R$     | Reverse Leakage Current @ $V_{RWM}$ |
| $V_{BR}$  | Reverse Breakdown Voltage @ $I_T$   |
| $I_T$     | Test Current for Reverse Breakdown  |
| $V_C$     | Clamping Voltage @ $I_{PP}$         |
| $I_{PP}$  | Maximum Peak Pulse Current          |
| $C_{ESD}$ | Parasitic Capacitance               |
| $V_R$     | Reverse Voltage                     |
| f         | Small Signal Frequency              |

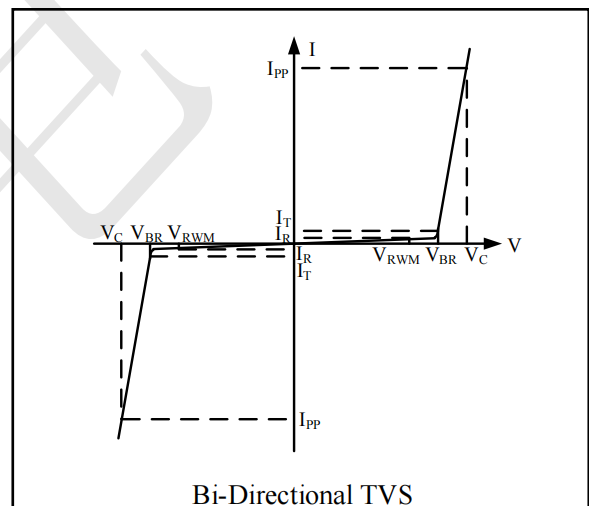


| Parameter               | Symbol    | Test Condition                        | Min  | Typ | Max | Unit |
|-------------------------|-----------|---------------------------------------|------|-----|-----|------|
| Reverse Working Voltage | $V_{RWM}$ |                                       |      |     | 24  | V    |
| Breakdown Voltage       | $V_{BR}$  | $I_T = 1\text{mA}$                    | 26.5 |     |     | V    |
| Reverse Leakage Current | $I_R$     | $V_{RWM} = 24\text{V}$                |      |     | 0.2 | μA   |
| Clamping Voltage        | $V_C$     | $I_{PP} = 1\text{A}$ (8 x 20μs pulse) |      |     | 43  | V    |
| Clamping Voltage        | $V_C$     | $I_{PP} = 6\text{A}$ (8 x 20us pulse) |      |     | 50  | V    |
| Junction Capacitance    | $C_J$     | $V_R = 0\text{V}$ , f = 1MHz          |      | 0.8 |     | pF   |

**Electrical Characteristics ( $T_A=25^\circ\text{C}$  unless otherwise specified)**


**Fig1. 8/20 $\mu\text{s}$  Pulse Waveform**

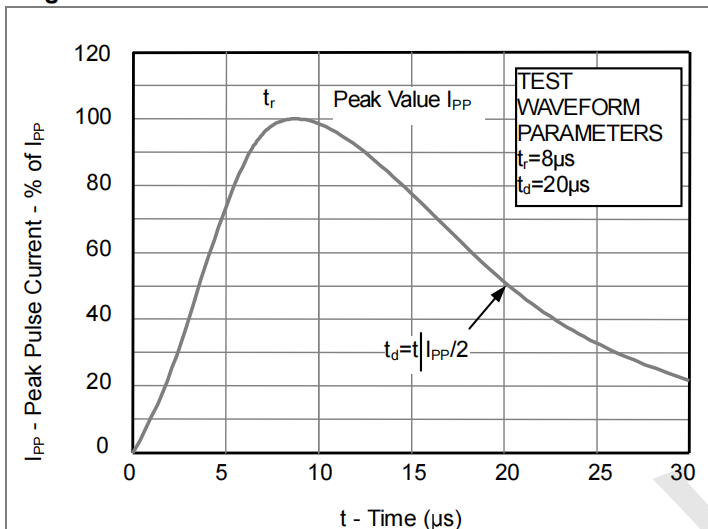


**Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)**

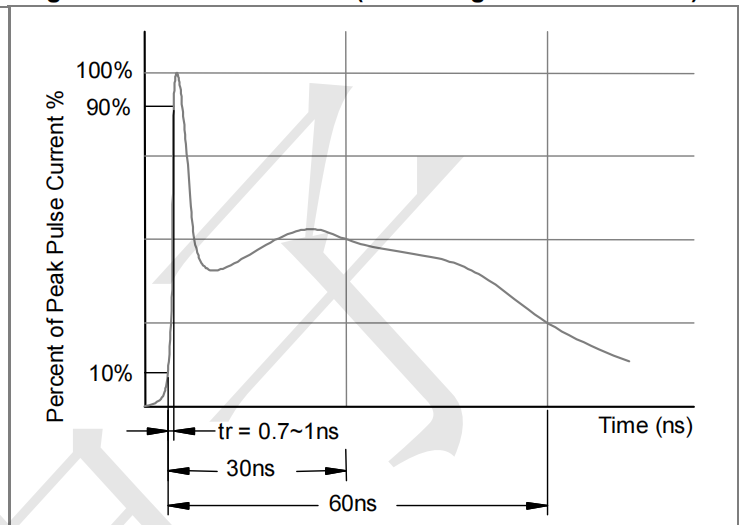

**Fig3. Power Derating Curve**

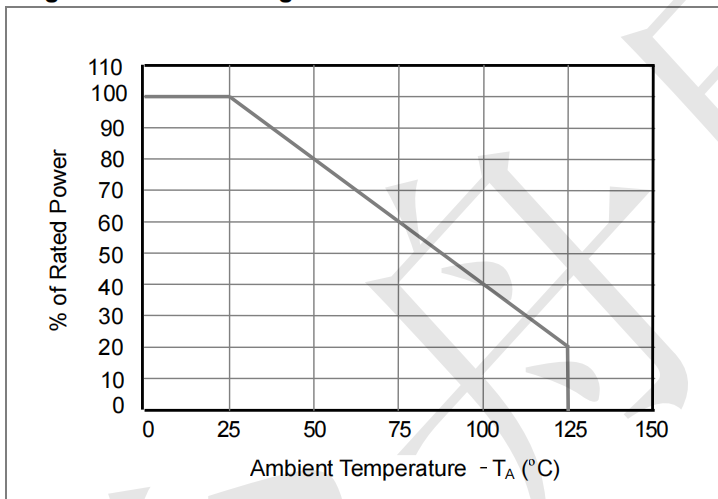


**Outline Drawing - SOD-323**

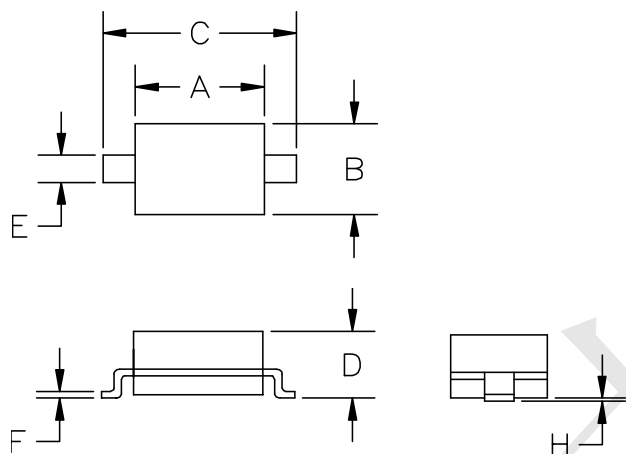

| SYM | DIMENSIONS  |      |        |       |
|-----|-------------|------|--------|-------|
|     | MILLIMETERS |      | INCHES |       |
|     | MIN         | MAX  | MIN    | MAX   |
| A   | 1.50        | 1.80 | 0.060  | 0.071 |
| B   | 1.20        | 1.40 | 0.045  | 0.054 |
| C   | 2.30        | 2.70 | 0.090  | 0.107 |
| D   | -           | 1.10 | -      | 0.043 |
| E   | 0.30        | 0.40 | 0.012  | 0.016 |
| F   | 0.10        | 0.25 | 0.004  | 0.010 |
| H   | -           | 0.10 | -      | 0.004 |

**Land Pattern - SOD-323**

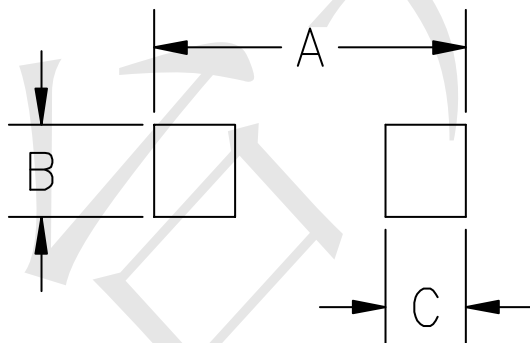

| SYM | DIMENSIONS  |        |
|-----|-------------|--------|
|     | MILLIMETERS | INCHES |
| A   | 3.15        | 0.120  |
| B   | 0.80        | 0.031  |
| C   | 0.80        | 0.031  |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [TECH PUBLIC](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)  
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)  
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)  
[ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)  
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)  
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)