



TECH PUBLIC

台舟电子

TP1722A-33PXA

300mA Low Dropout Linear Regulator

WWW.SOT23.COM.TW

FEATURE

- Very Low Dropout Voltage of 170mV at Output Current 300mA
- Guaranteed 300mA Output Current
- Low Ground Current at 90 μ A
- Stable with low ESR Ceramic Capacitors
- Fast Transient Response
- Current-limiting and Thermal Protection
- SOT89 Package
- RoHS Compliant and 100% Lead (Pb)-Free
- Output Voltage: 3.3V

APPLICATIONS

- Voltage Regulator for LAN Card, CD-ROM, and DVD
- Wireless Communication Systems
- Battery Powered Systems

Block Diagram



TECH PUBLIC


台舟电子

TP1722A-33PXA

300mA Low Dropout Linear Regulator

WWW.SOT23.COM.TW

Typical Application Circuit

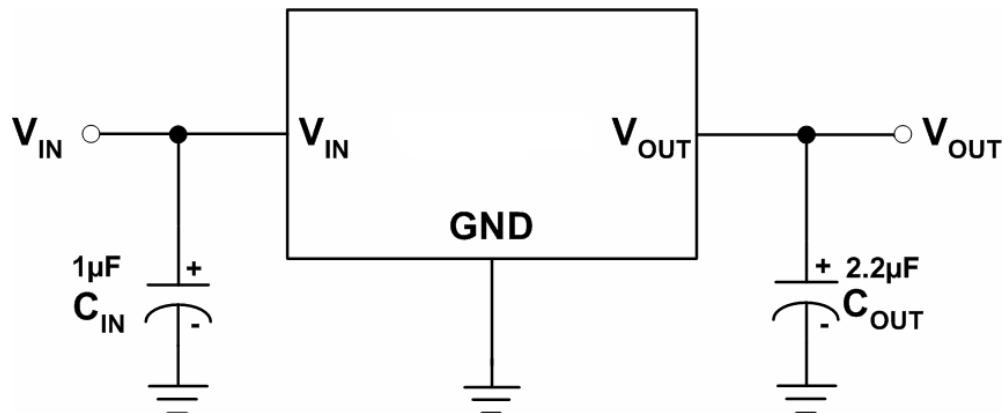

Pin Assignment

SOT89 Package

Absolute Maximum Ratings

| | |
|--|----------------|
| ■ Input Voltage ----- | -0.3V to 6V |
| ■ Operating Junction Temperature Range ----- | -40°C to 125°C |
| ■ Storage Temperature Range ----- | -65°C to 150°C |
| ■ Power Dissipation , P_D @ $T_A=25^\circ C$ | |
| SOT-89 ----- | 0.5W |
| ■ Package Thermal Resistance | |
| SOT-89, J_A ----- | 300°C/W |



TECH PUBLIC

台舟电子

TP1722A-33PXA

300mA Low Dropout Linear Regulator


WWW.SOT23.COM.TW

Electrical Characteristics

Unless otherwise specified, all limits guaranteed for $V_{IN} = V_O + 0.5V$, $C_{IN} = C_{OUT} = 2.2\mu F$, $T_J = 25^\circ C$.

| Symbol | Parameter | Conditions | | | | Unit |
|--------------|------------------------------|---|-----|------|------|------------------------|
| | | | Min | Typ | Max. | |
| V_{IN} | Input Voltage | | 2.5 | | 5.5 | V |
| ΔV_O | Output Voltage Tolerance | $100\mu A \leq I_{OUT} \leq 300mA$ $V_{IN}=V_O+0.5V$, | -3 | | +3 | % of $V_{OUT(NOM)}$ |
| I_O | Maximum Output Current | Continuous | 300 | | | mA |
| I_{LIMIT} | Output Current Limit | | 350 | | | mA |
| I_Q | Supply Current | $I_{OUT}=0mA$ | | 90 | 200 | μA |
| V_{DO} | Dropout Voltage | $I_{OUT}=300mA$ | | 170 | | mV |
| ΔV_O | Line Regulation | $I_{OUT} = 1mA, (V_O + 0.5V) \leq V_I \leq 5.5V$ | | 0.05 | 0.2 | %/V |
| | Load Regulation | $1mA \leq I_{OUT} \leq 300mA$ | | 15 | 35 | mV |
| T_{SD} | Thermal Shutdown Temperature | | | 160 | | $^\circ C$ |
| | Thermal Shutdown Hysteresis | | | 20 | | |

3-pin SOT89 Outline Dimensions

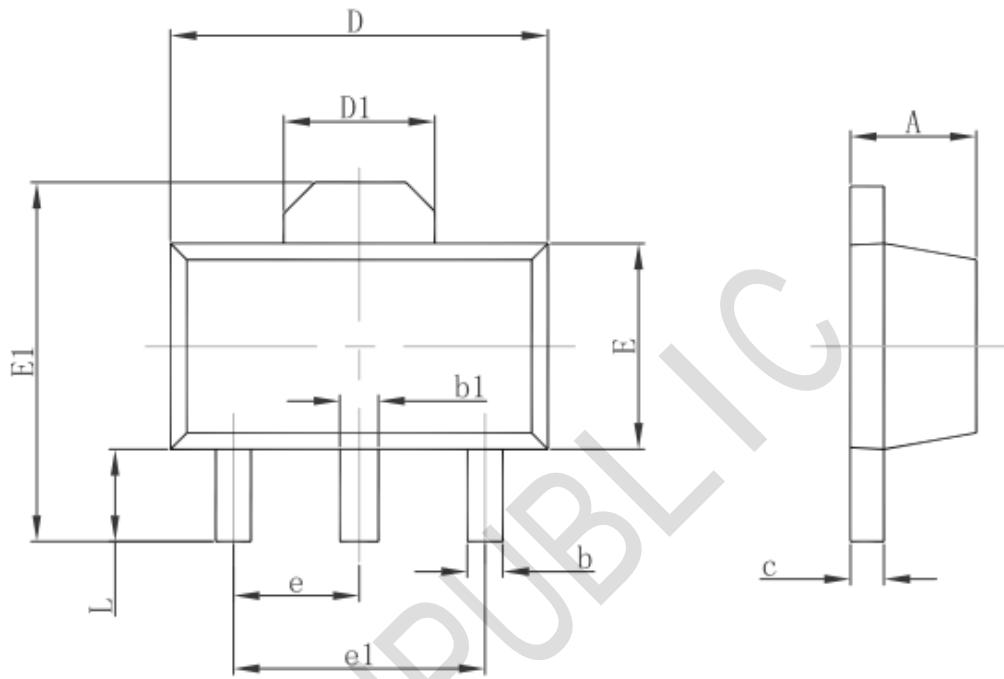

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 1.400 | 1.600 | 0.055 | 0.063 |
| b | 0.320 | 0.520 | 0.013 | 0.020 |
| b1 | 0.400 | 0.580 | 0.016 | 0.023 |
| c | 0.350 | 0.440 | 0.014 | 0.017 |
| D | 4.400 | 4.600 | 0.173 | 0.181 |
| D1 | 1.550 REF. | | 0.061 REF. | |
| E | 2.300 | 2.600 | 0.091 | 0.102 |
| E1 | 3.940 | 4.250 | 0.155 | 0.167 |
| e | 1.500 TYP. | | 0.060 TYP. | |
| e1 | 3.000 TYP. | | 0.118 TYP. | |
| L | 0.900 | 1.200 | 0.035 | 0.047 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LDO Voltage Regulators category:

Click to view products by TECH PUBLIC manufacturer:

Other Similar products are found below :

[M38D29FFHP#U1](#) [702103A](#) [717726C](#) [742457H](#) [MP20051DN-LF-Z](#) [R5F111PGGFB#30](#) [AP7363-SP-13](#) [NCP103AMX285TCG](#)
[NCV8664CST33T3G](#) [NCV8752AMX28TCG](#) [L9454](#) [AP7362-HA-7](#) [LX13043CLD](#) [TCR3DF185,LM\(CT](#) [TCR3DF24,LM\(CT](#)
[TCR3DF285,LM\(CT](#) [TCR3DF31,LM\(CT](#) [TCR3DF45,LM\(CT](#) [TLF4949EJ](#) [L9708](#) [L970813TR](#) [030014BB](#) [059985X](#) [EAN61387601](#)
[EAN61573601](#) [NCP121AMX173TCG](#) [NCP4687DH15T1G](#) [NCV8703MX30TCG](#) [701326R](#) [702087BB](#) [755078E](#) [TCR2EN28,LF\(S](#)
[LM1117DT-1.8/NO](#) [LT1086CM#TRPBF](#) [AZ1085S2-1.5TRE1](#) [MAX15101EWL+T](#) [NCV8170AXV250T2G](#) [SCD337BTG](#)
[TCR3DF27,LM\(CT](#) [TCR3DF19,LM\(CT](#) [TCR3DF125,LM\(CT](#) [TCR2EN18,LF\(S](#) [MAX15103EWL+T](#) [TS2937CZ-5.0 C0](#) [MAX8878EUK30-T](#) [MAX663CPA](#) [NCV4269CPD50R2G](#) [NCV8716MT30TBG](#) [AZ1117IH-1.2TRG1](#) [MP2013GQ-P](#)