

## Features

- General rectification
- Low  $V_F$ ; Low  $I_R$
- High reliability


## Applications

- surface mount schottky barrier rectifier

## Ordering Information

- Shipping Qty:3000/7inch Tape& Reel

SOD323

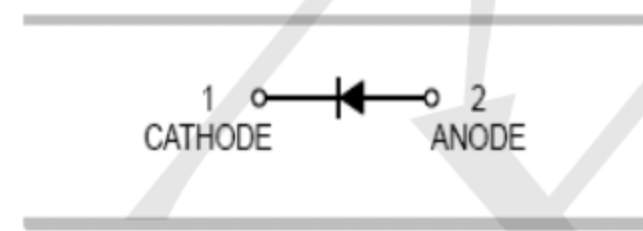

## Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	TPB1A30-323	TPB1A40-323	Units
Peak Repetitive Reverse Voltage	$V_{RRM}$	30	40	V
RMS Reverse Voltage	$V_{RMS}$	21	28	V
Maximum Average Forward Output Current	$I_{F(AV)}$	1		A
Peak Forward Surge Current, 8.3ms Single Half-sine-wave	$I_{FSM}$	10		A

## Thermal Characteristics ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	TPB1A30-323	TPB1A40-323	Units
Power Dissipation	$P_D$	250		mW
Typical Thermal Resistance per leg	$R_{\theta JA}^*$	400		$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	$T_J$	125		$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55 to +150		$^\circ\text{C}$

\* Part mounted on FR-4 board with recommended pad layout

## Electrical Characteristics ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test conditions	Min.	Typ.	Max.	Units
Forward Voltage	$V_F^*$	$I_F=1\text{A}$ <b>TPB1A30-323</b>	-	-	0.55	V
		$I_F=1\text{A}$ <b>TPB1A40-323</b>			0.60	
		$I_F=3\text{A}$ <b>TPB1A30-323</b>			0.875	
		$I_F=3\text{A}$ <b>TPB1A40-323</b>	-	-	0.90	
Maximum Peak Reverse Current	$I_R^{**}$	$V_R=30\text{V}$ <b>TPB1A30-323</b> $V_R=40\text{V}$ <b>TPB1A40-323</b>	-	-	1	mA
Capacitance Between Terminals	$C_T$	$V_R=4\text{V}, f=1\text{MHz}$	-	39	120	pF

**Features**  
**Typical Electrical Characteristic Curves**

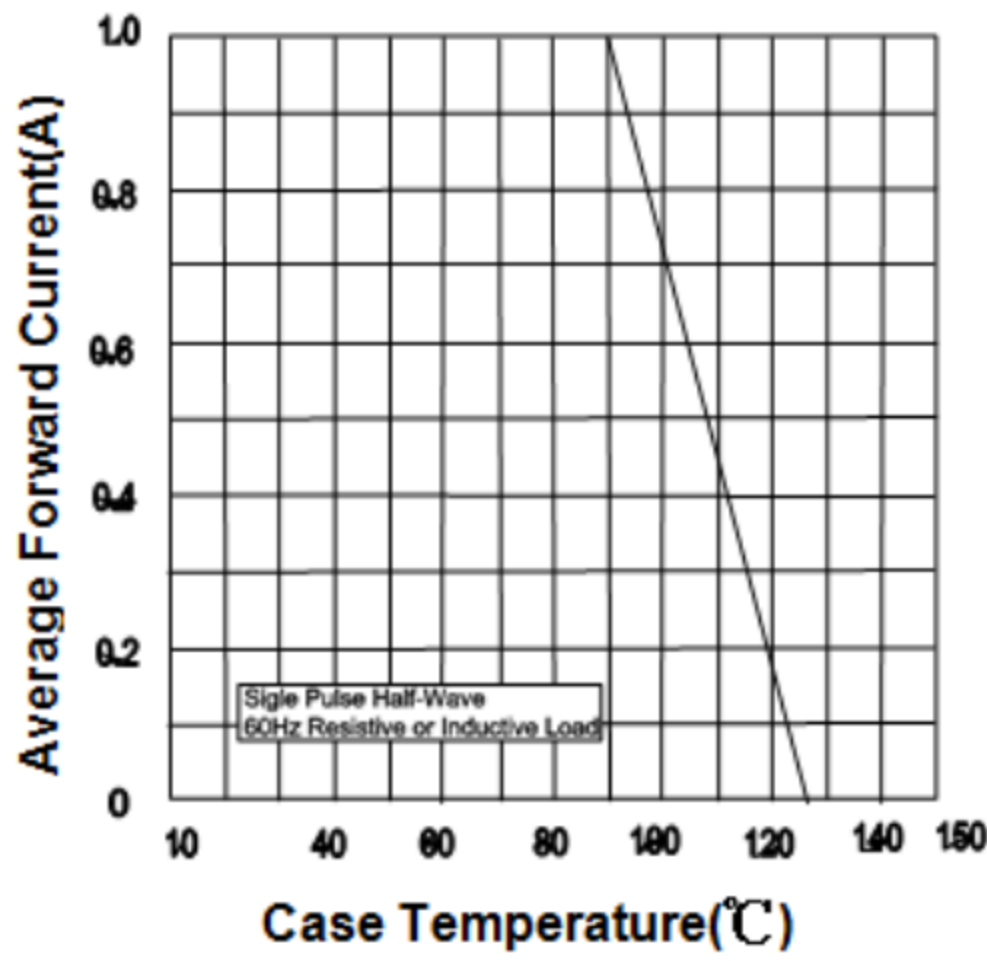


Fig.1 Forward Current Derating Curve

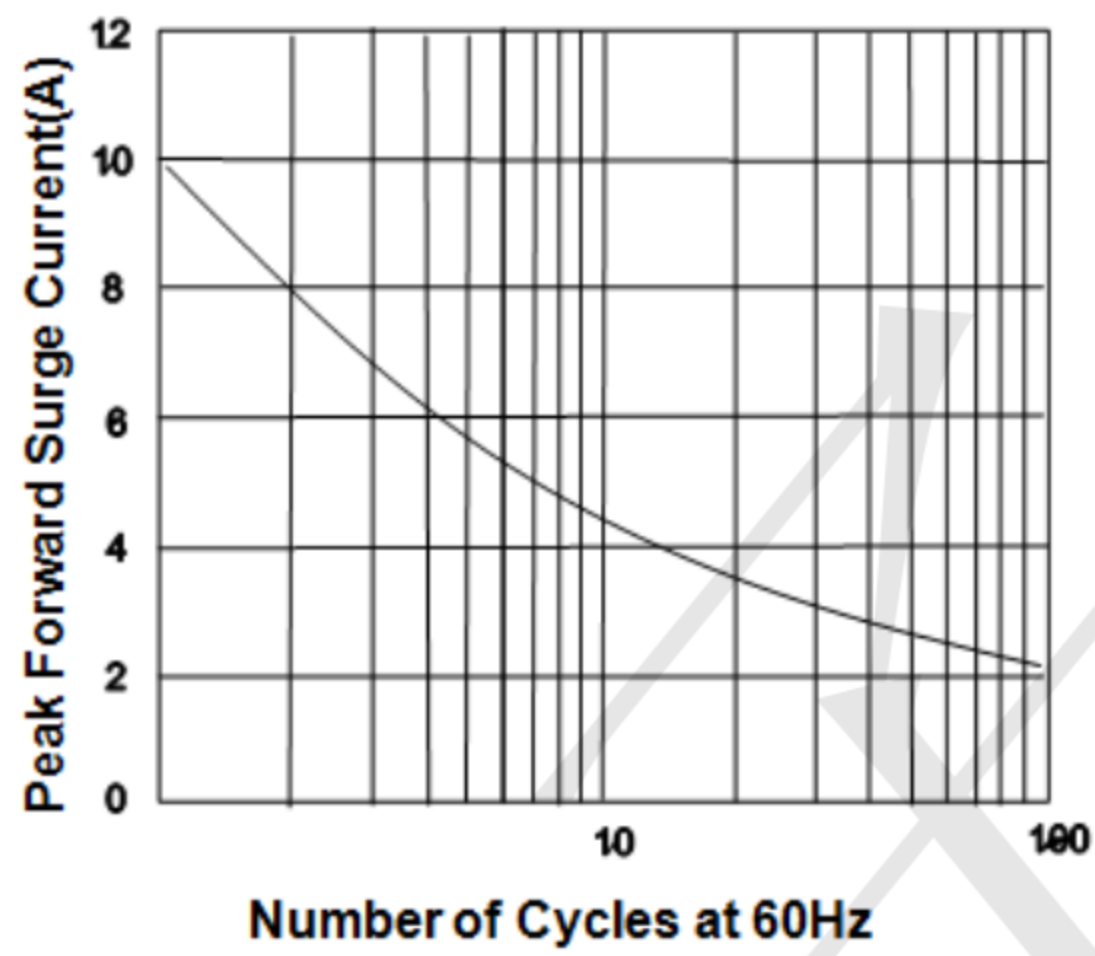


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

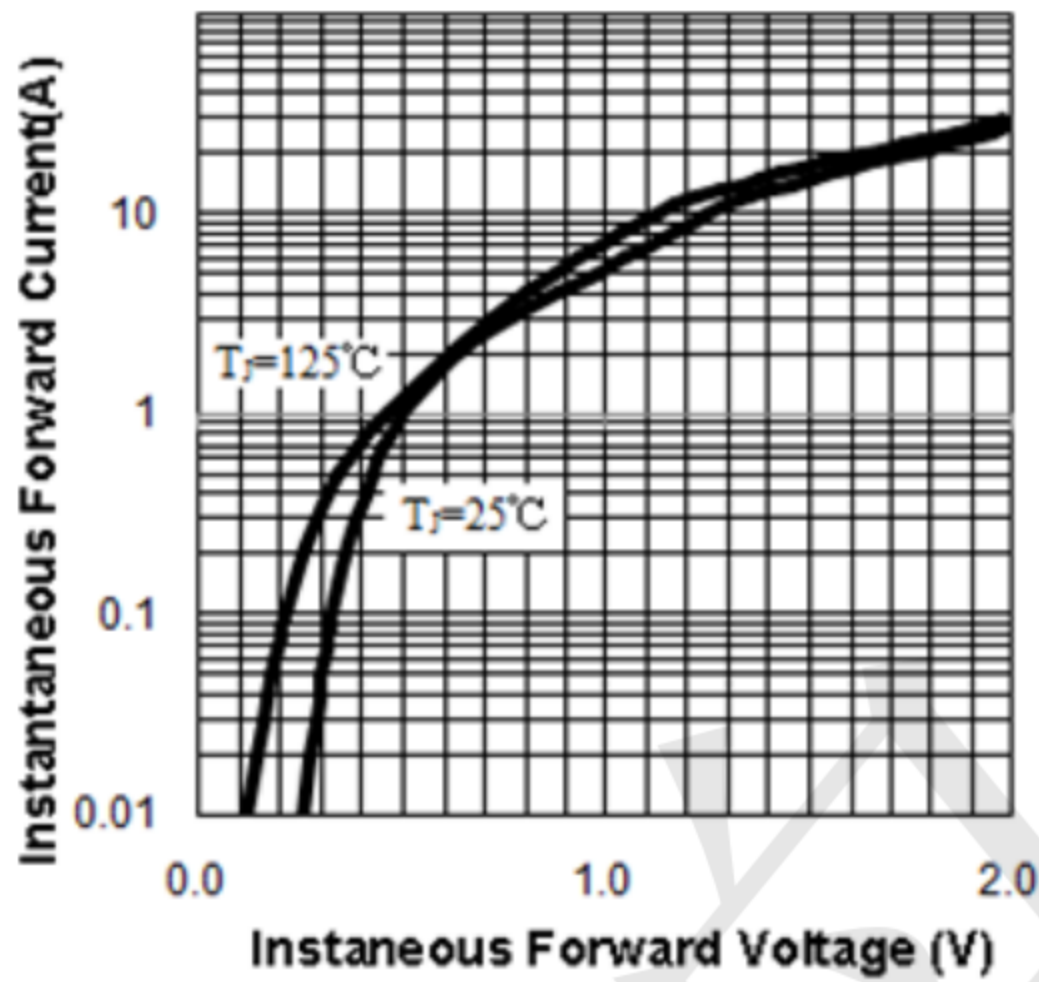


Fig.3 Typical Instantaneous Forward Characteristics


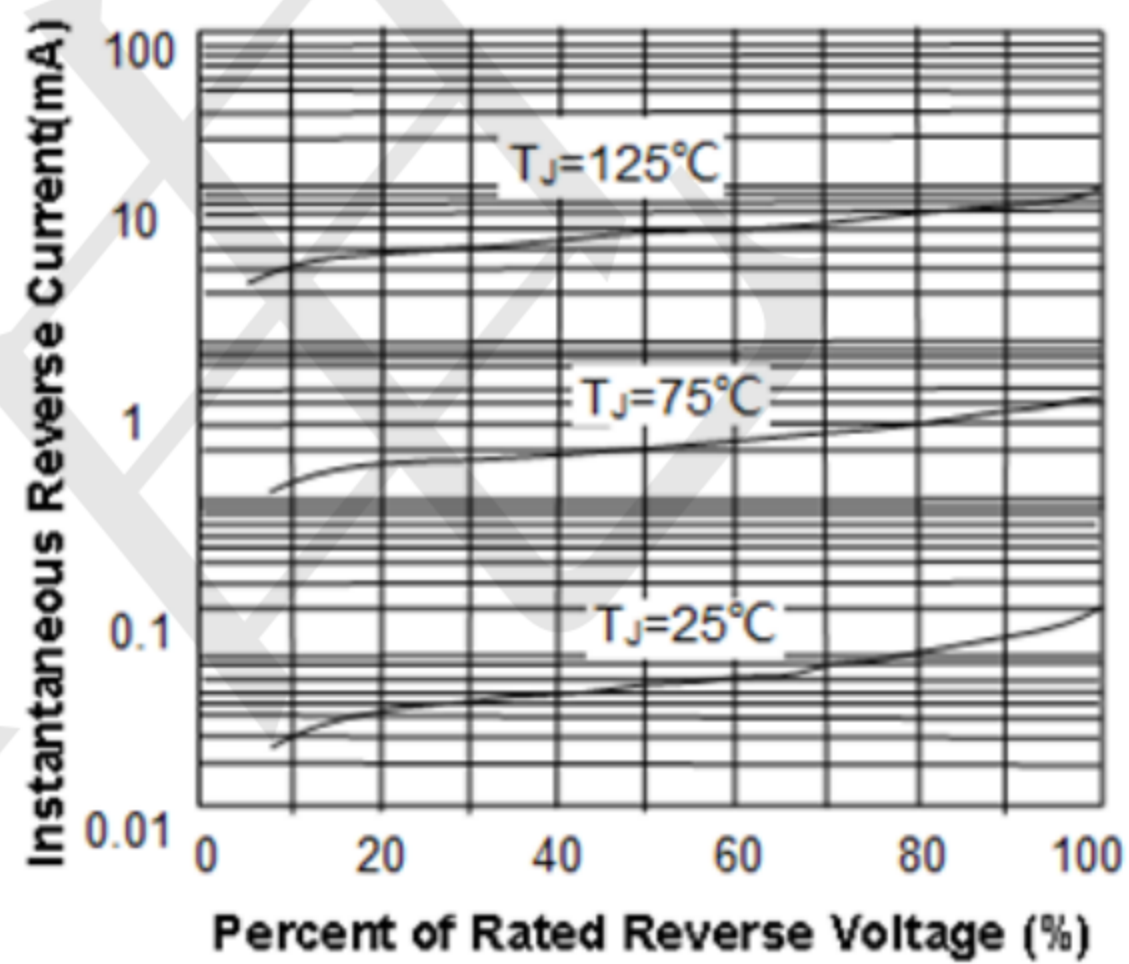



Fig.4 Typical Reverse Characteristics

**Features**  
**Outline Drawing - SOD323**

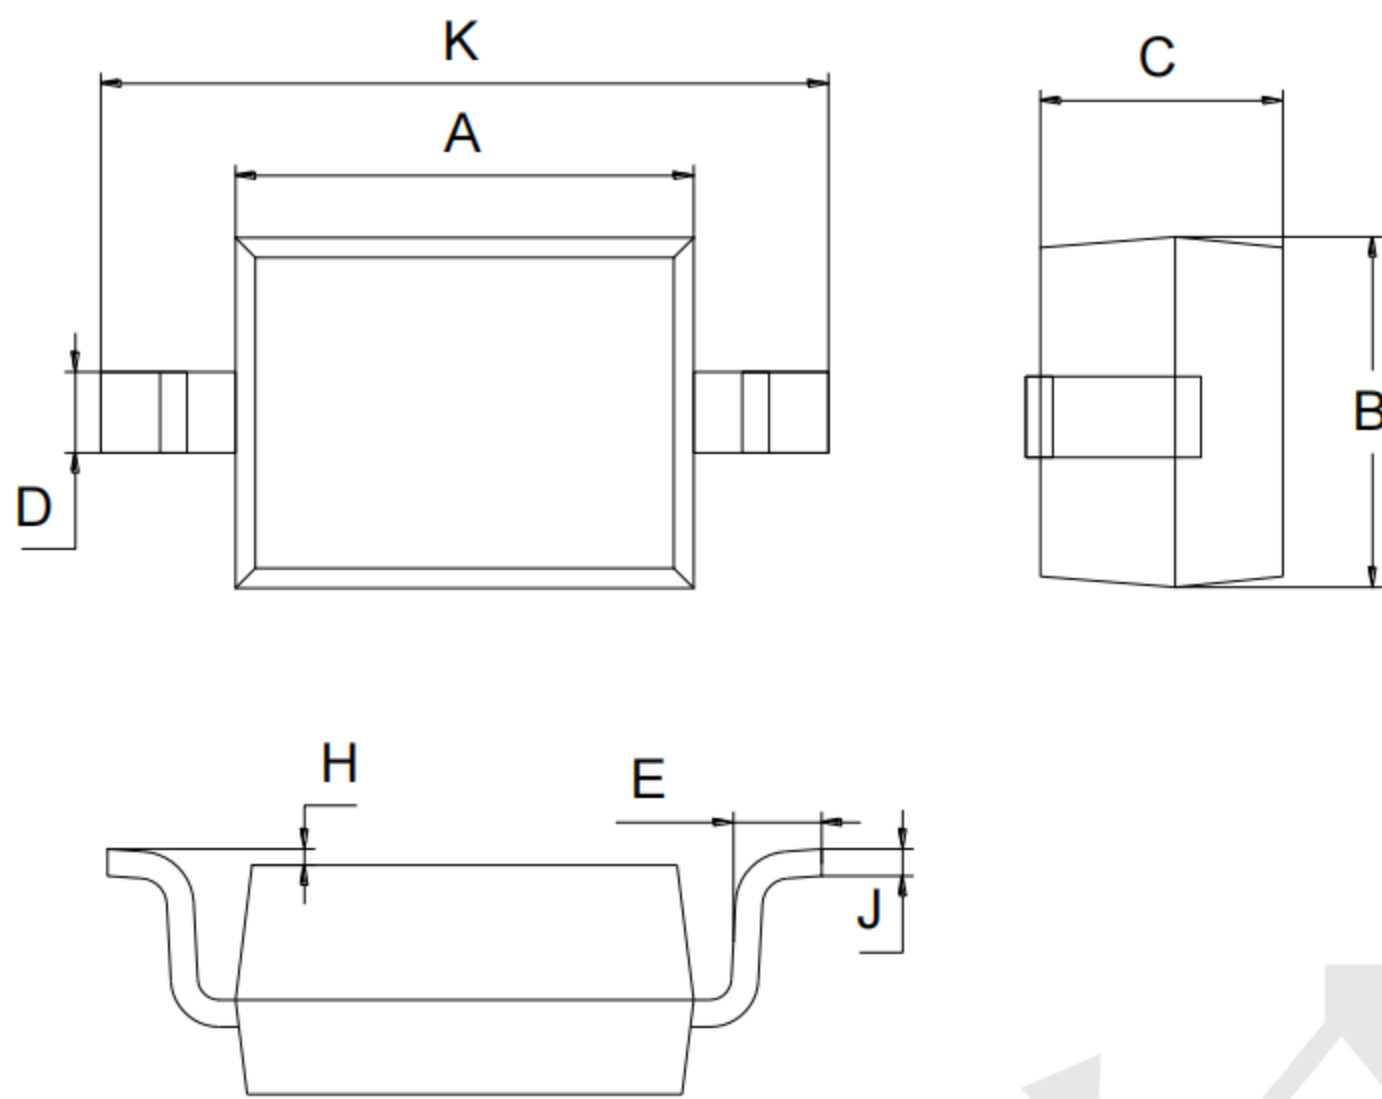

SOD-323		
Dim	Min	Max
A	1.60	1.80
B	1.20	1.40
C	0.80	0.90
D	0.25	0.35
E	0.22	0.42
H	0.02	0.10
J	0.05	0.15
K	2.55	2.75

**Mounting Pad Layout-SOD323 (unit: mm)**

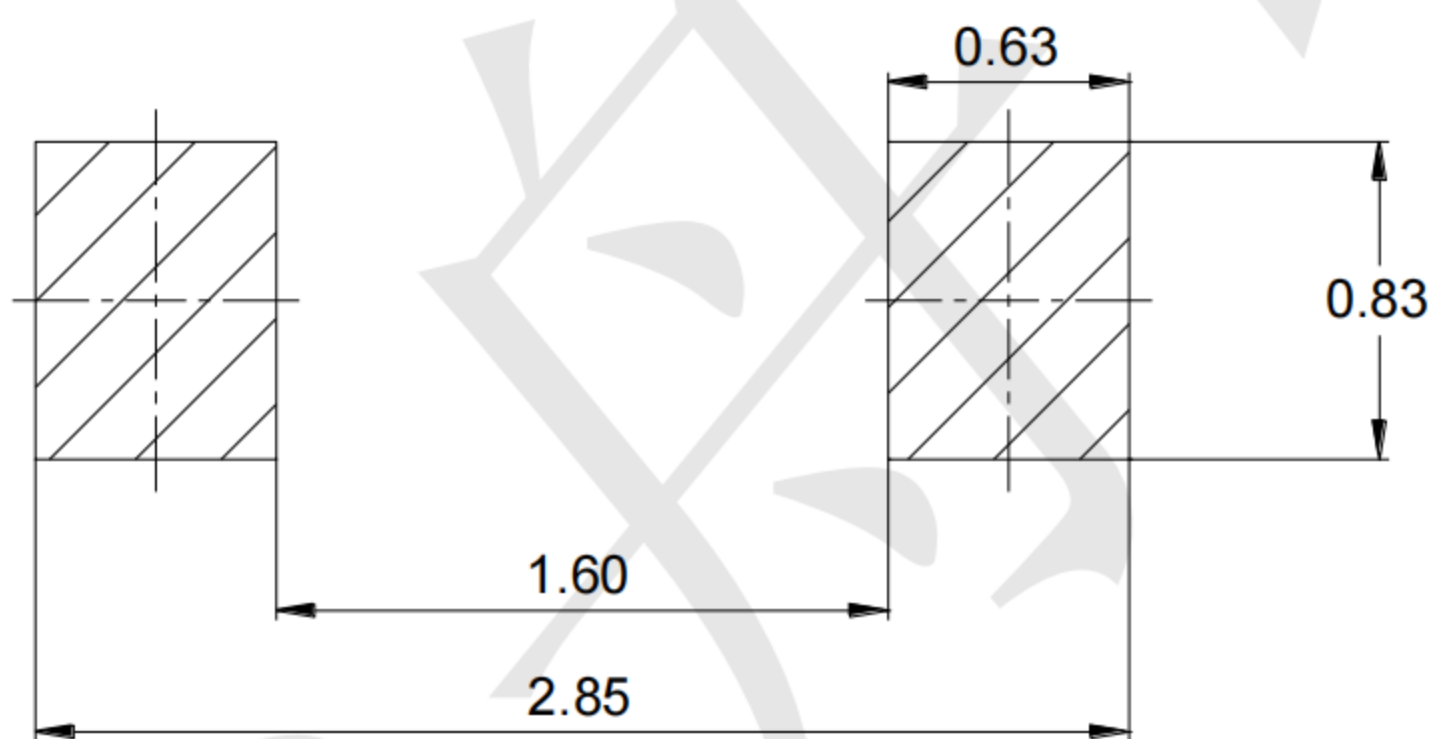

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [TECH PUBLIC](#) manufacturer:*

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAT 54-02LRH E6327](#)  
[NRVBAF360T3G](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SK310-T](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [GA01SHT18](#)  
[CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRA140TRPBF](#) [MBRB30H30CT-1G](#) [BAT 15-04R E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#)  
[SB007-03C-TB-E](#) [SK33B-TP](#) [NRVBB20100CTT4G](#) [NRVBM120LT1G](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#)  
[ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [CDBQC0240LR-HF](#) [ACDBA260LR-HF](#)  
[ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#) [1N5819T-G](#)  
[B0530WSQ-7-F](#) [PDS1040Q-13](#) [B160BQ-13-F](#) [SDM05U20CSP-7](#) [B140S1F-7](#)