



Features

- High current gain
- Excellent h_{FE} linearity
- Low noise

Mechanical data


- Case: SOT-363
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208

Ordering Information

- Shipping Qty:3000/7inch Tape& Reel



Circuit Diagram

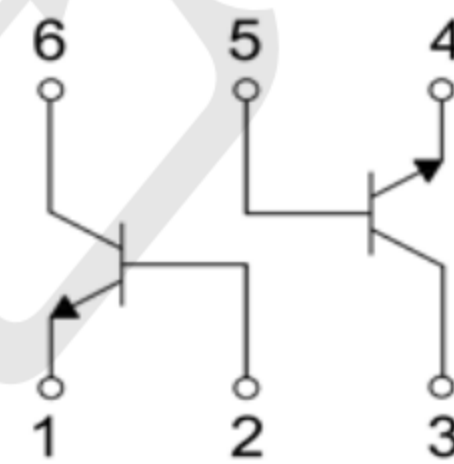

Absolute Maximum Ratings (T_{amb}=25°C unless otherwise specified)

Parameter	Symbol	TPBC846S	Unit
Collector-Base Voltage	V_{CBO}	80	V
Collector-Emitter Voltage	V_{CEO}	65	V
Emitter-Base Voltage	V_{EBO}	6	V
Collector Current (Continuous)	I_C	100	mA
Collector Current (Peak)	I_{CM}	200	mA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation (Collector)	P_D	300	mW
Thermal Resistance Junction-to-Air *1	$R_{\theta JA}$	417	°C/W
Thermal Resistance Junction-to-Case *1	$R_{\theta JC}$	260	°C/W
Thermal Resistance Junction-to-Lead *1	$R_{\theta JL}$	320	°C/W
Operating Junction Temperature	T_J	-55 ~ +150	°C
Storage Temperature Range	T_{STG}	-55 ~ +150	°C



Electrical Characteristics NPN 4401 (TA=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 10\mu A, I_E = 0$	80	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 10mA, I_B = 0$	65	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 10\mu A, I_C = 0$	6	-	-	V
Collector Cut-off Current	I_{CBO}	$V_{CB} = 30V, I_E = 0$	-	-	15	nA
		$V_{CB} = 30V, I_E = 0$ $T_J = 150^\circ C$	-	-	5	μA
Emitter-base Cut-off Current	I_{EBO}	$V_{EB} = 5V, I_C = 0$	-	-	100	nA
Collector-emitter Cut-off Current	I_{CEO}	$V_{CE} = 30V, I_B = 0$	-	-	1	mA
DC Current Gain	h_{FE}	$V_{CE} = 5V, I_C = 10\mu A$	-	250	-	-
DC Current Gain		$V_{CE} = 5V, I_C = 2mA$	200	-	450	-
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 10mA, I_B = 0.5mA$	-	0.09	0.25	V
		$I_C = 100mA, I_B = 5mA$	-	0.20	0.60	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 10mA, I_B = 0.5mA$	-	0.70	0.90	V
		$I_C = 100mA, I_B = 5mA$	-	0.90	1.10	V
Base-Emitter Voltage	$V_{BE(ON)}$	$V_{CE} = 5V, I_C = 2mA$	0.58	0.66	0.70	V
		$V_{CE} = 5V, I_C = 10mA$	-	-	0.77	V
Transition Frequency	f_T	$V_{CE} = 5V, I_C = 10mA$ $f = 100MHz$	100	-	-	MHz



Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise Specified)

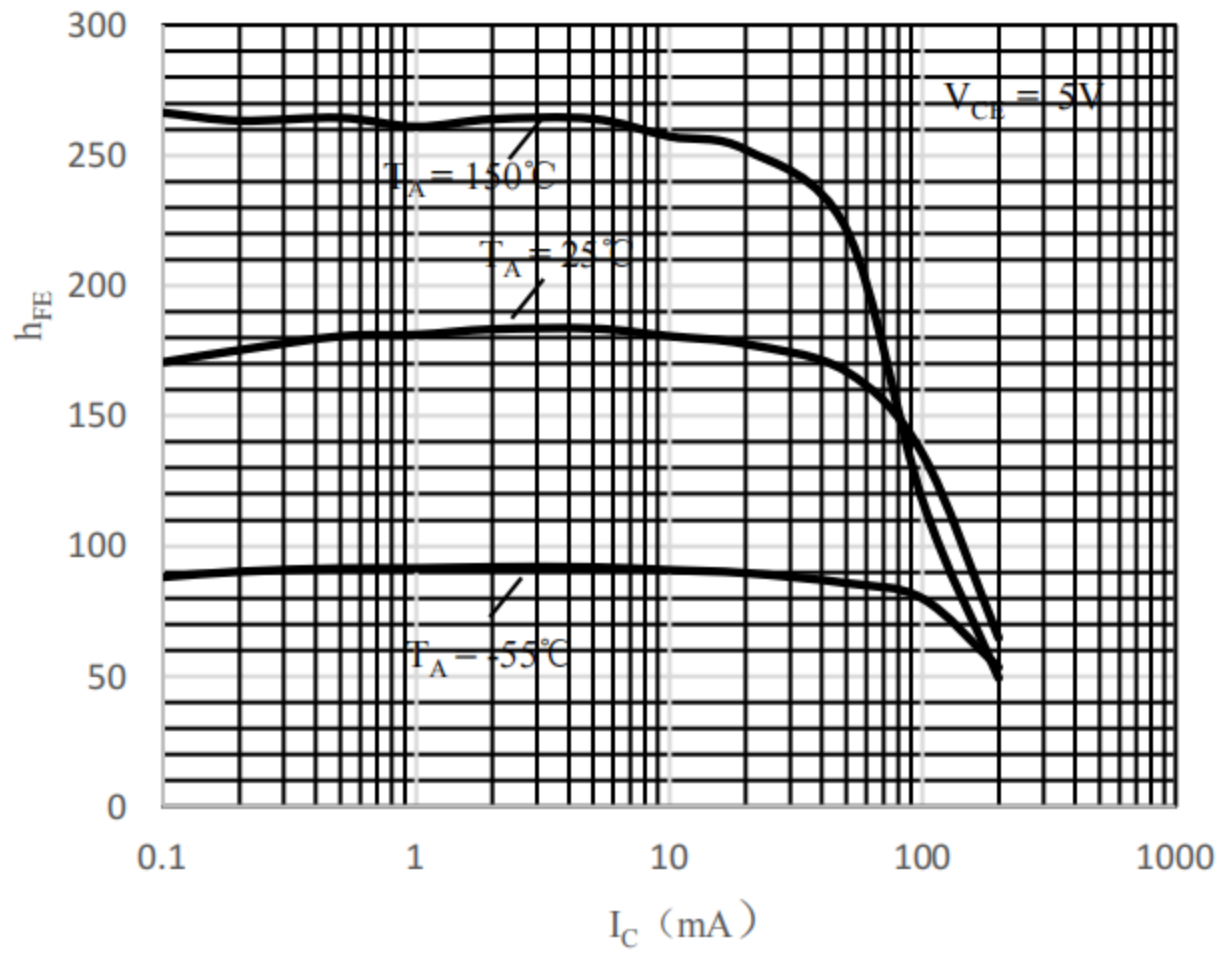


Fig 1 h_{FE} vs. I_C

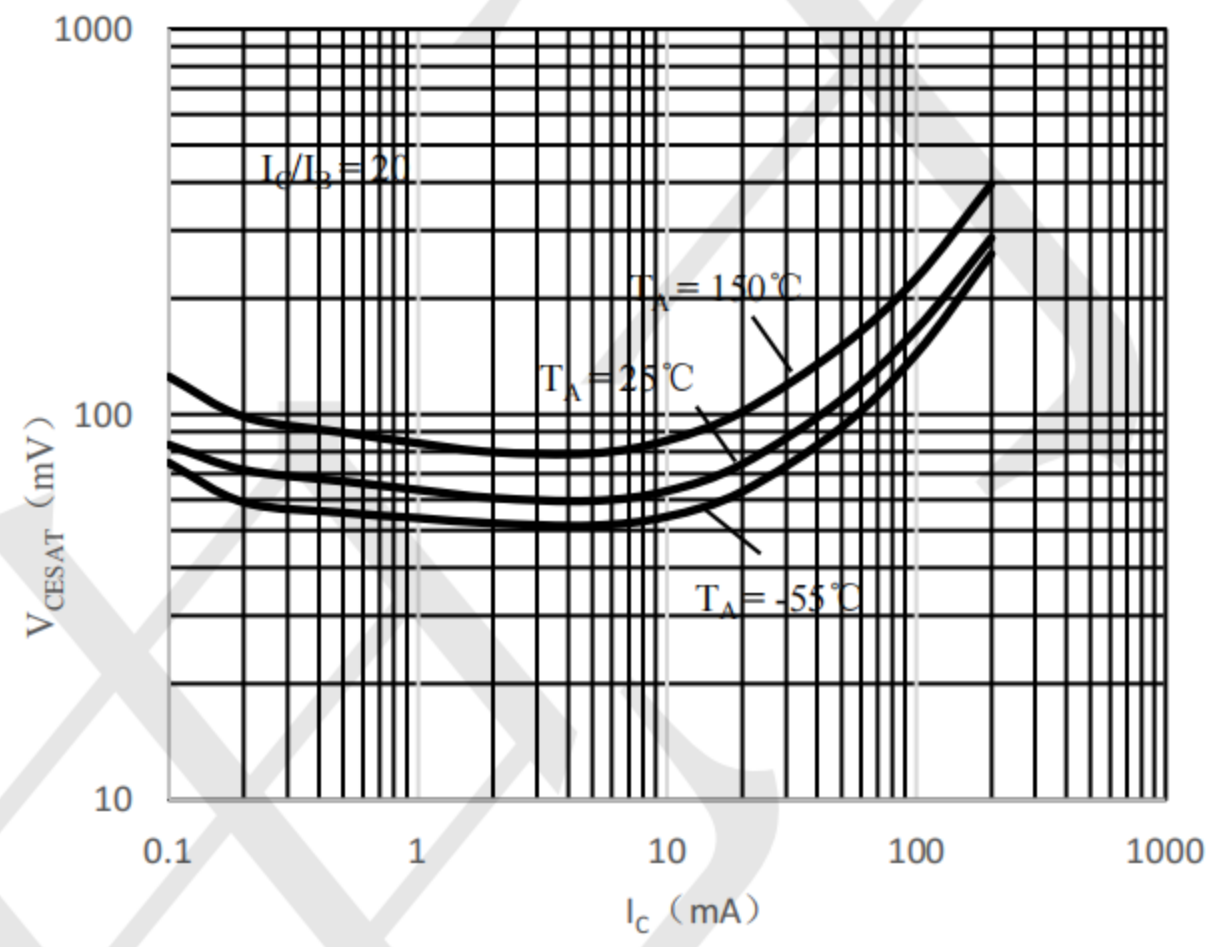


Fig 2 $V_{CE(sat)}$ vs. I_C

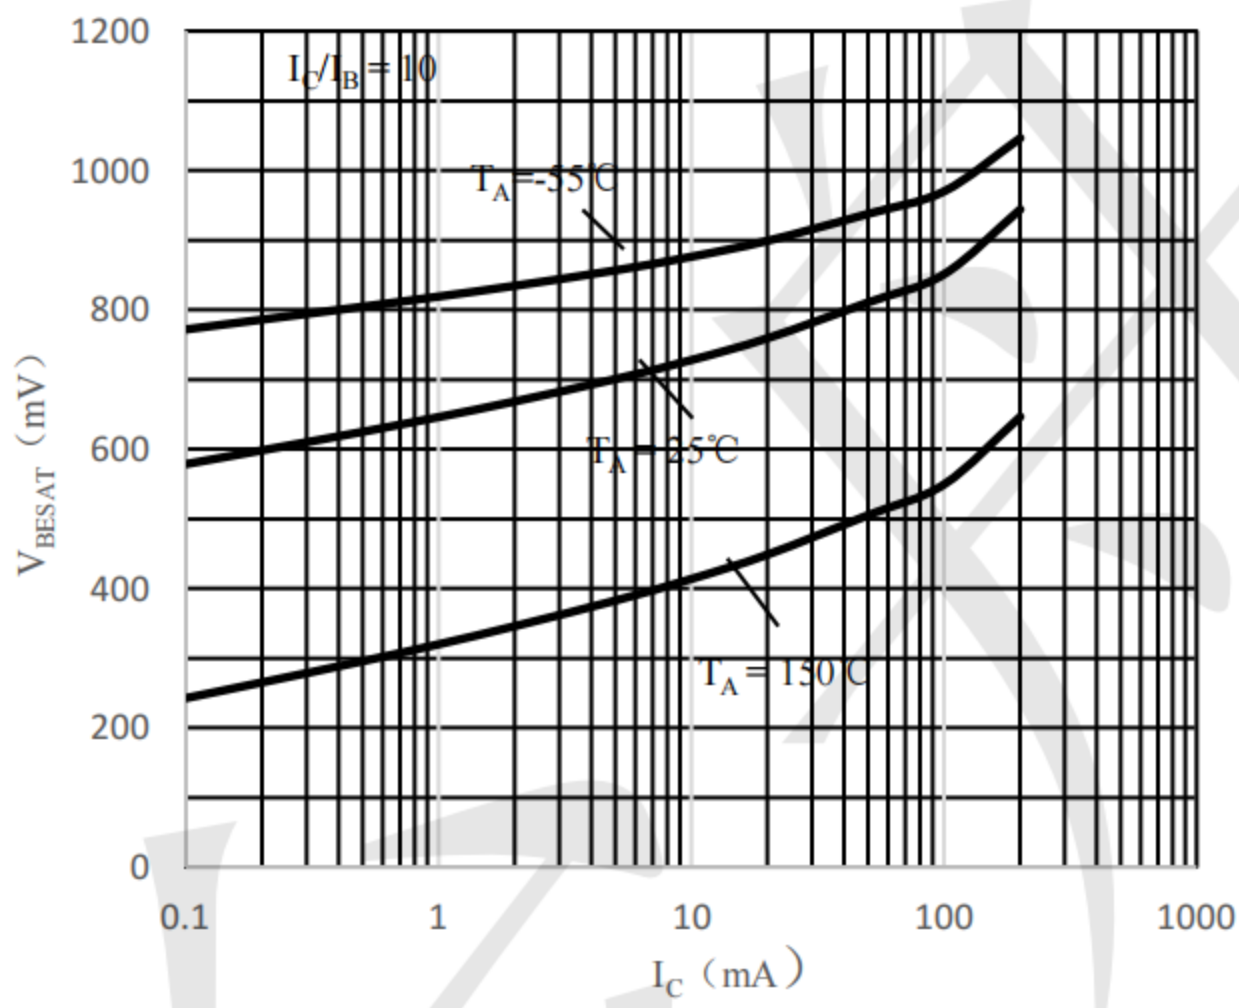


Fig 3 $V_{BE(sat)}$ vs. I_C

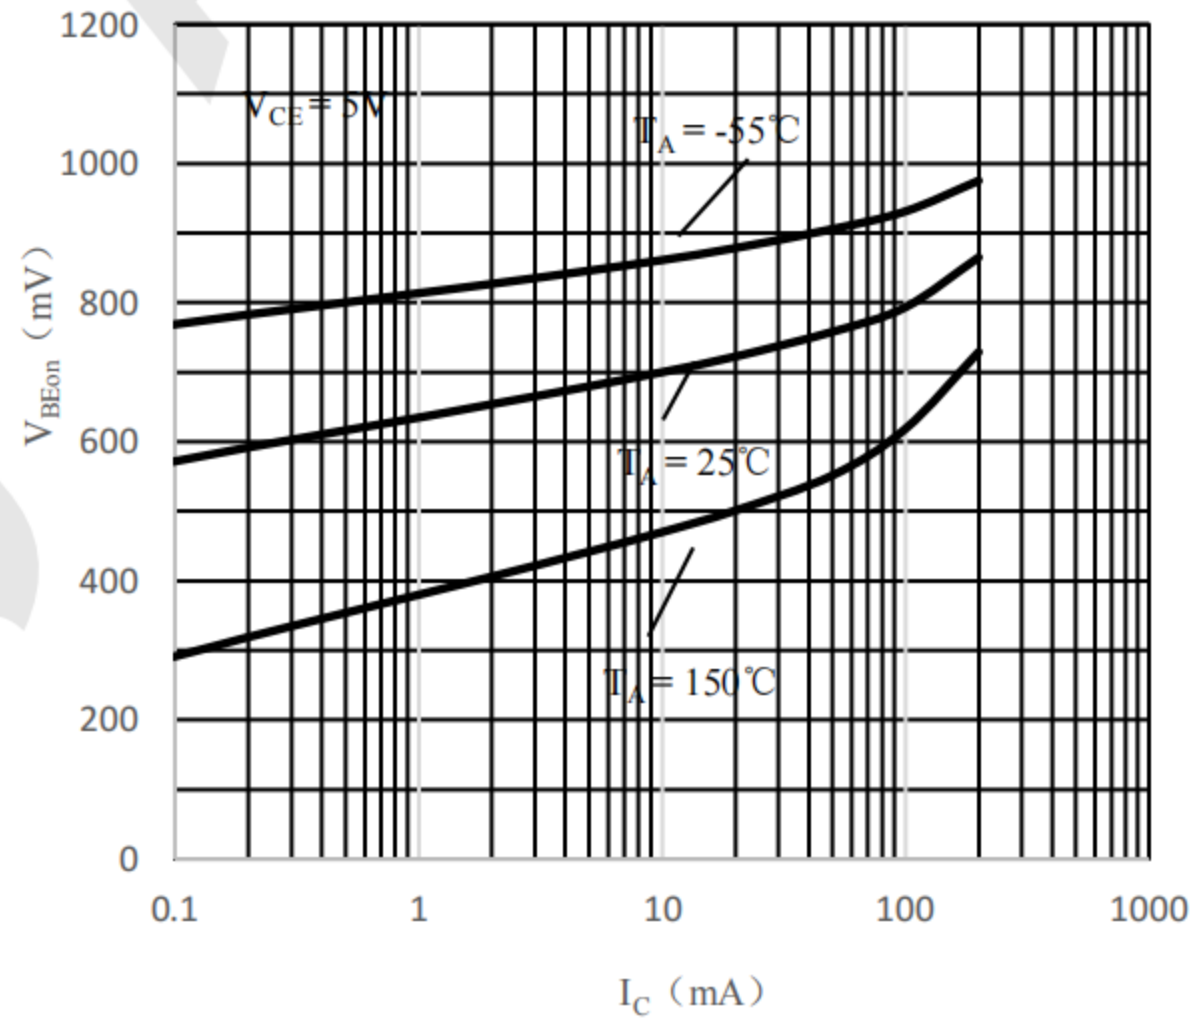


Fig 4 $V_{BE(on)}$ vs. I_C



Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise Specified)

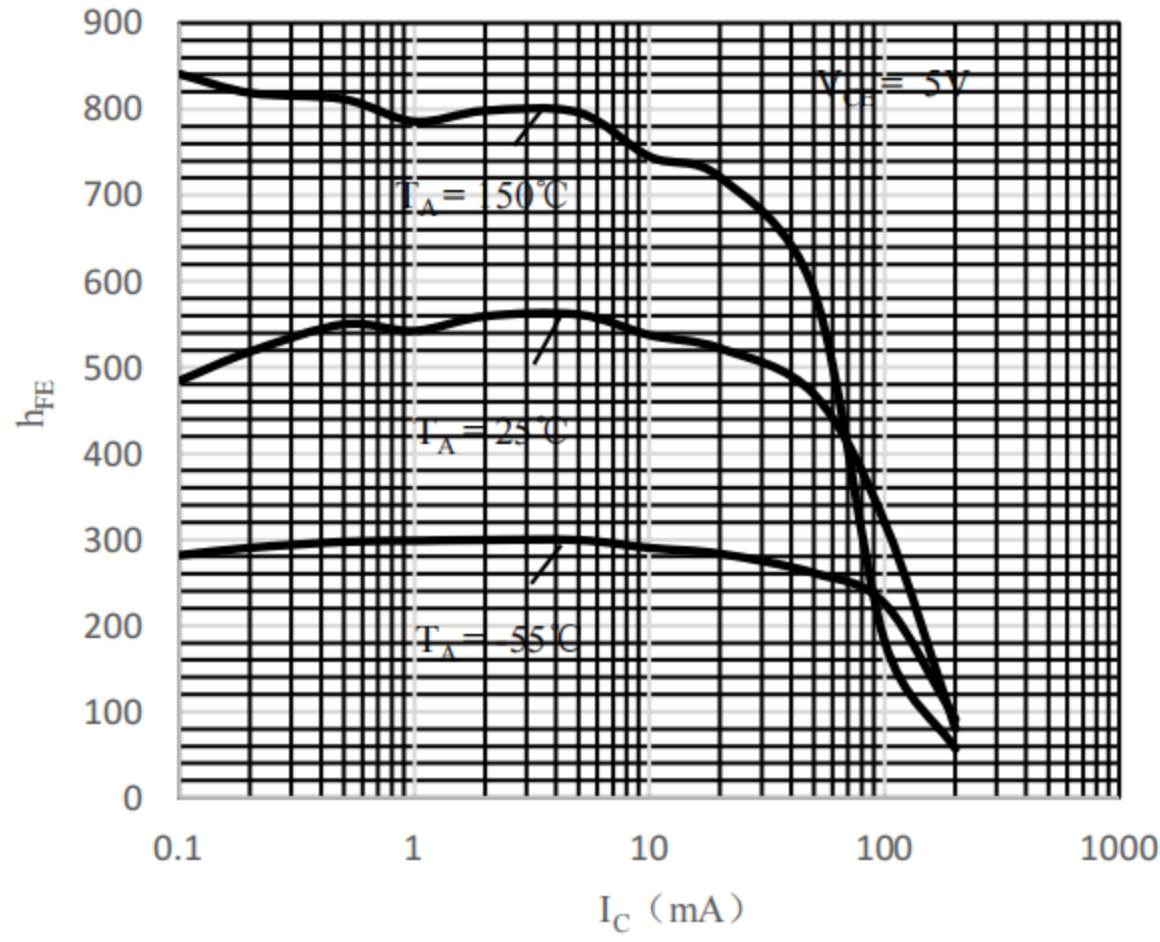


Fig 1 h_{FE} vs. I_C

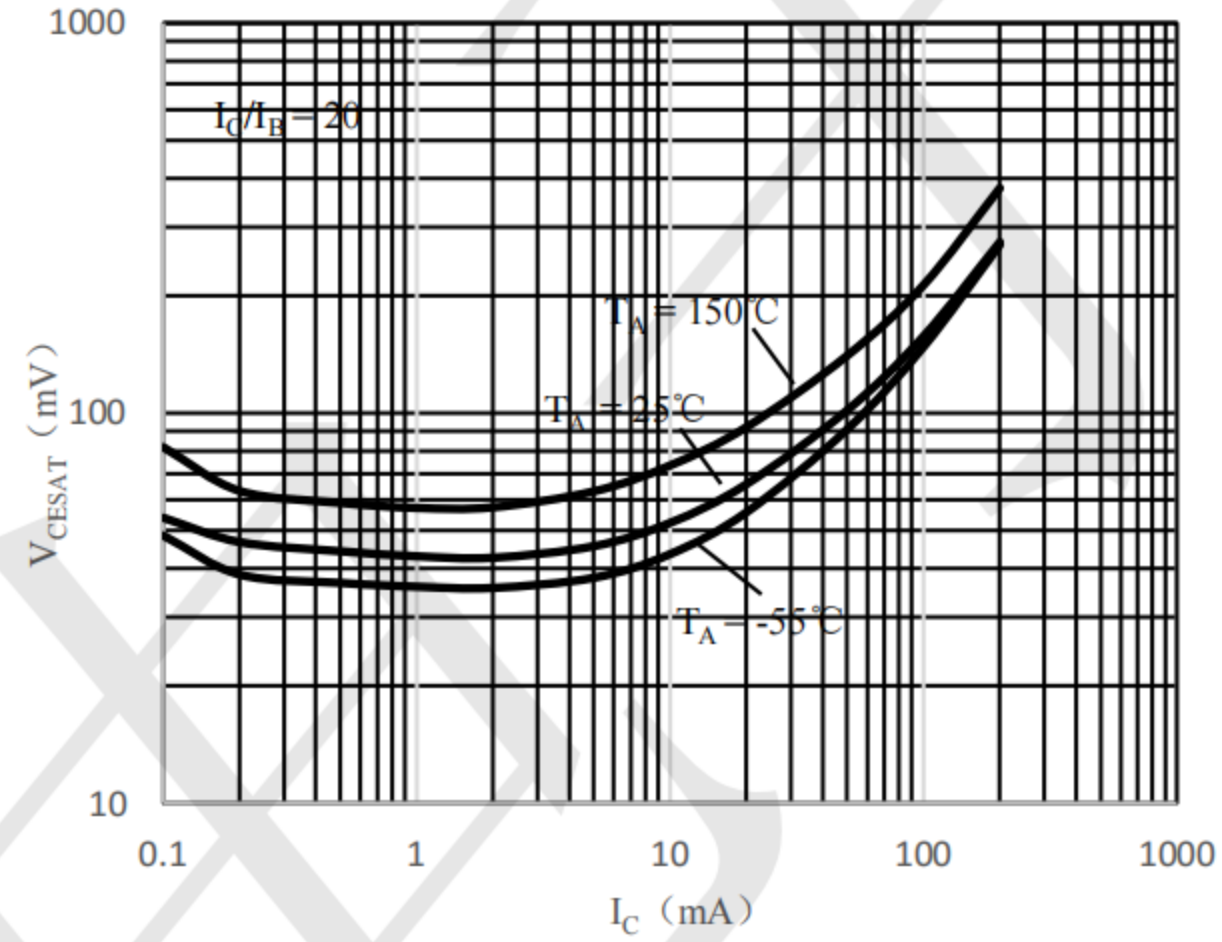


Fig 2 $V_{CE(sat)}$ vs. I_C

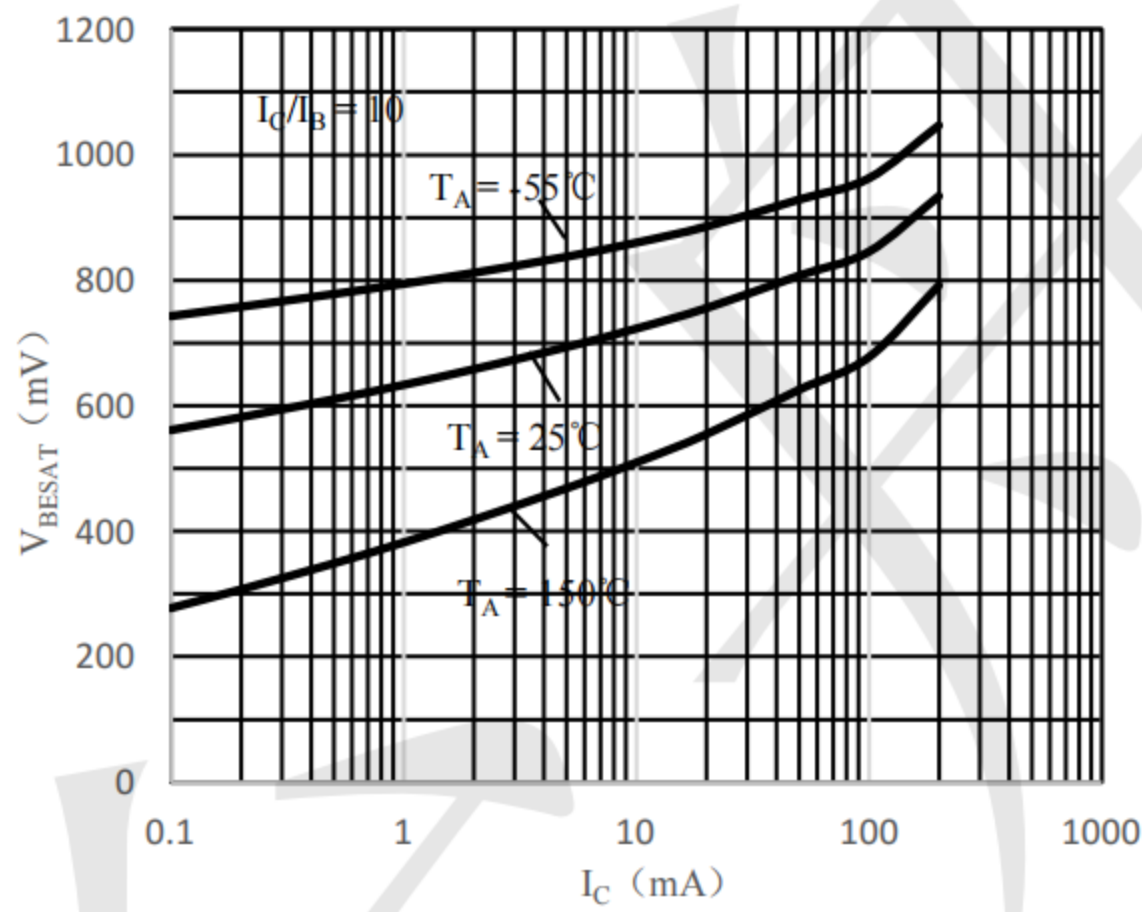


Fig 3 $V_{BE(sat)}$ vs. I_C

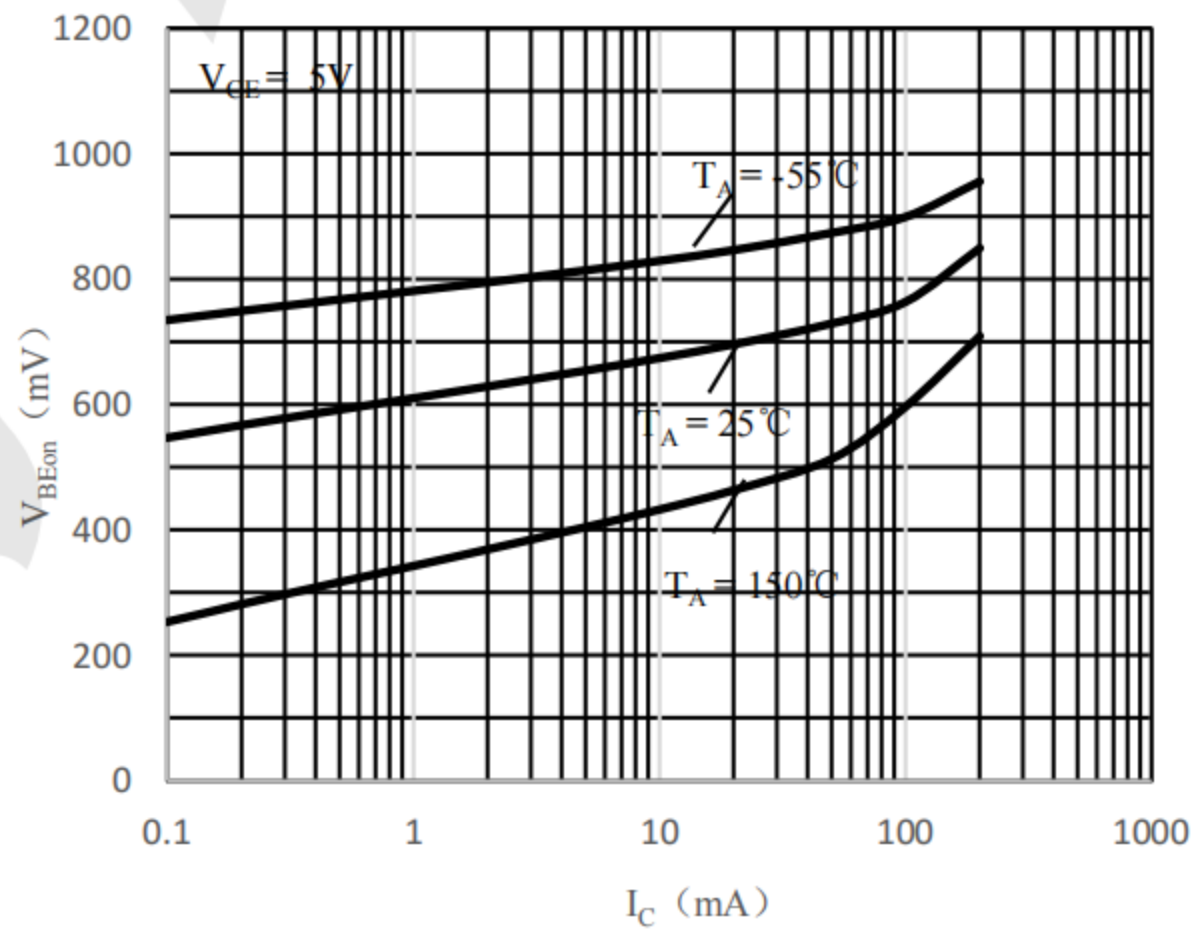


Fig 4 $V_{BE(on)}$ vs. I_C



Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise Specified)

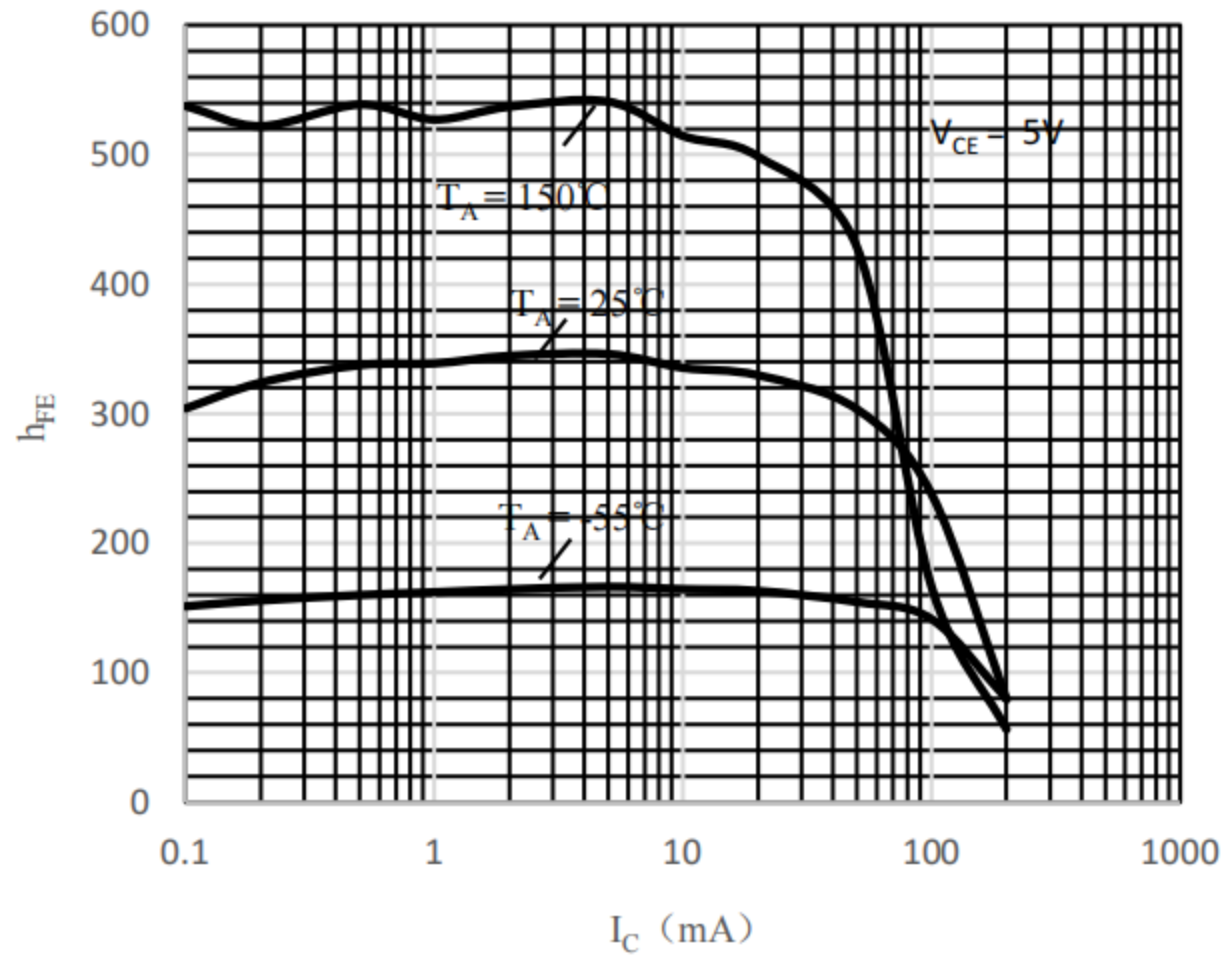


Fig 1 h_{FE} vs. I_C

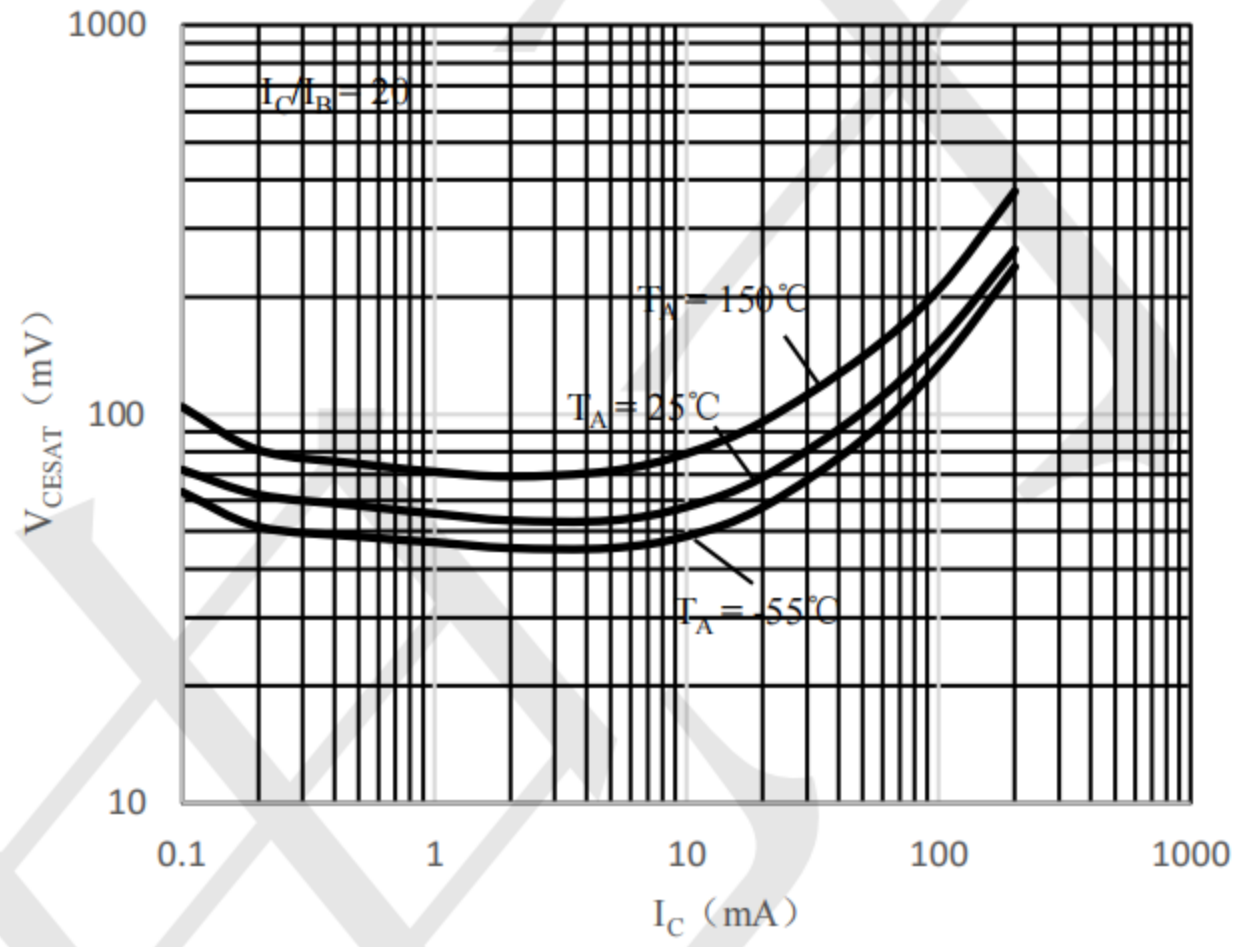


Fig 2 $V_{CE(sat)}$ vs. I_C

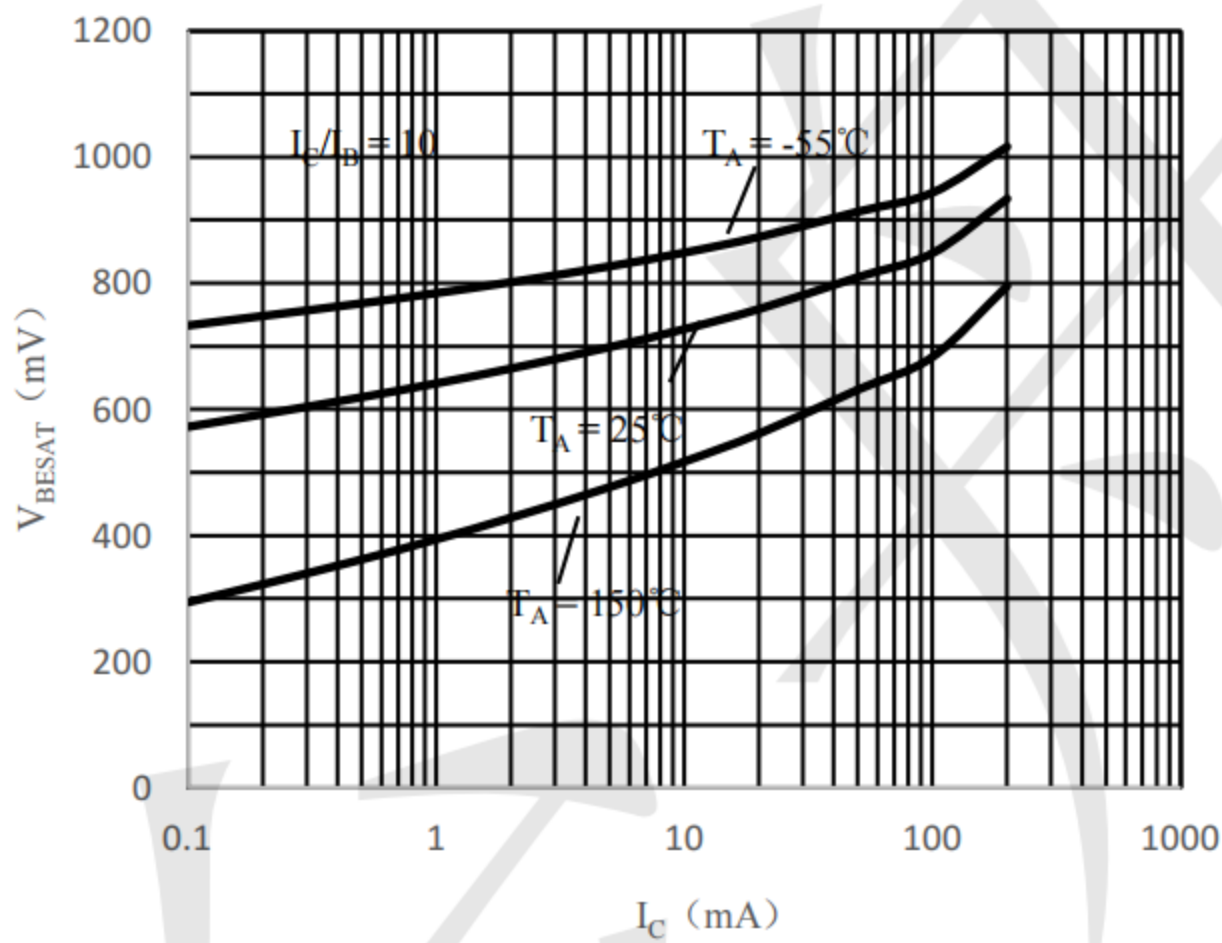


Fig 3 $V_{BE(sat)}$ vs. I_C


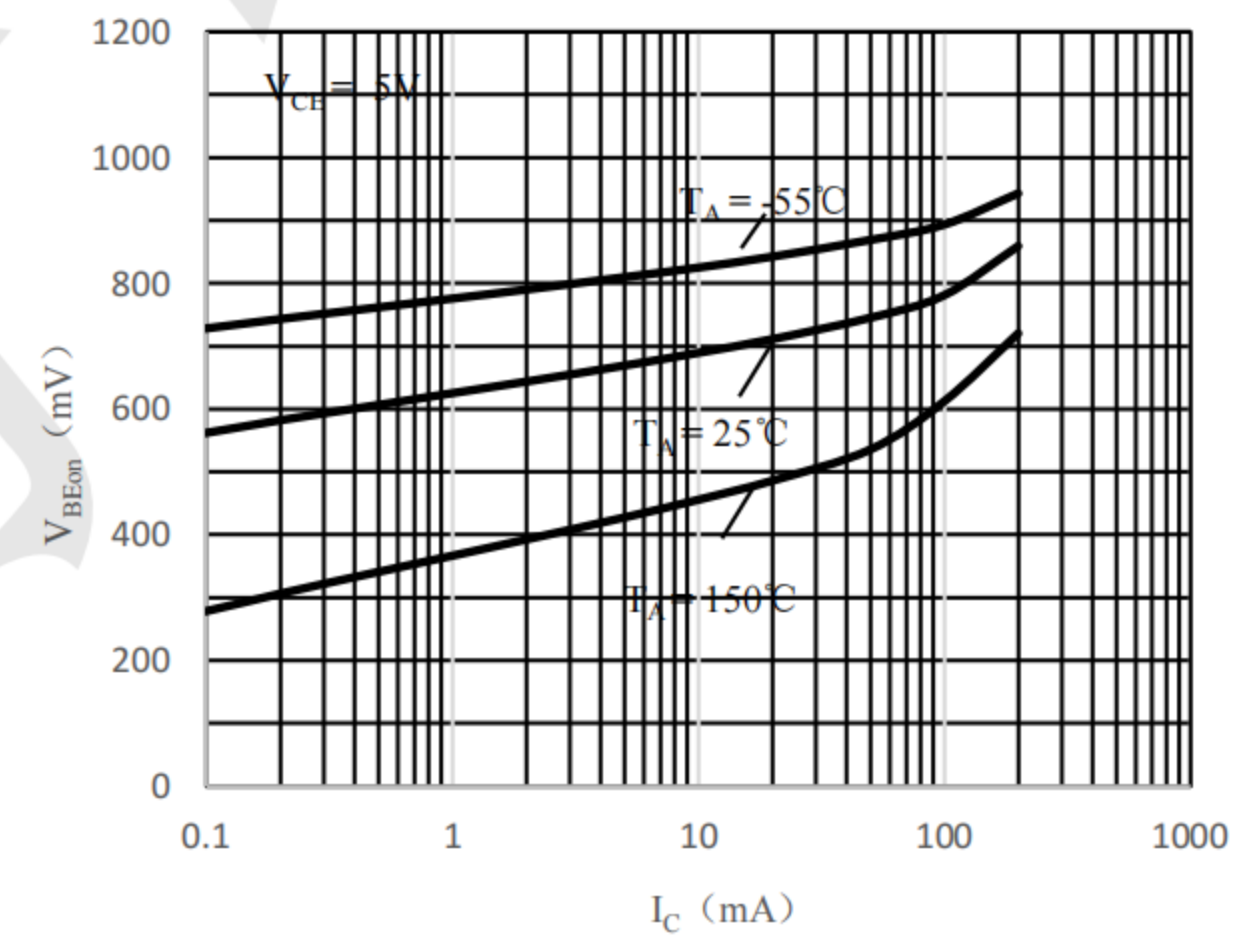


Fig 4 $V_{BE(on)}$ vs. I_C




Outline Drawing - SOT363 (unit: mm)

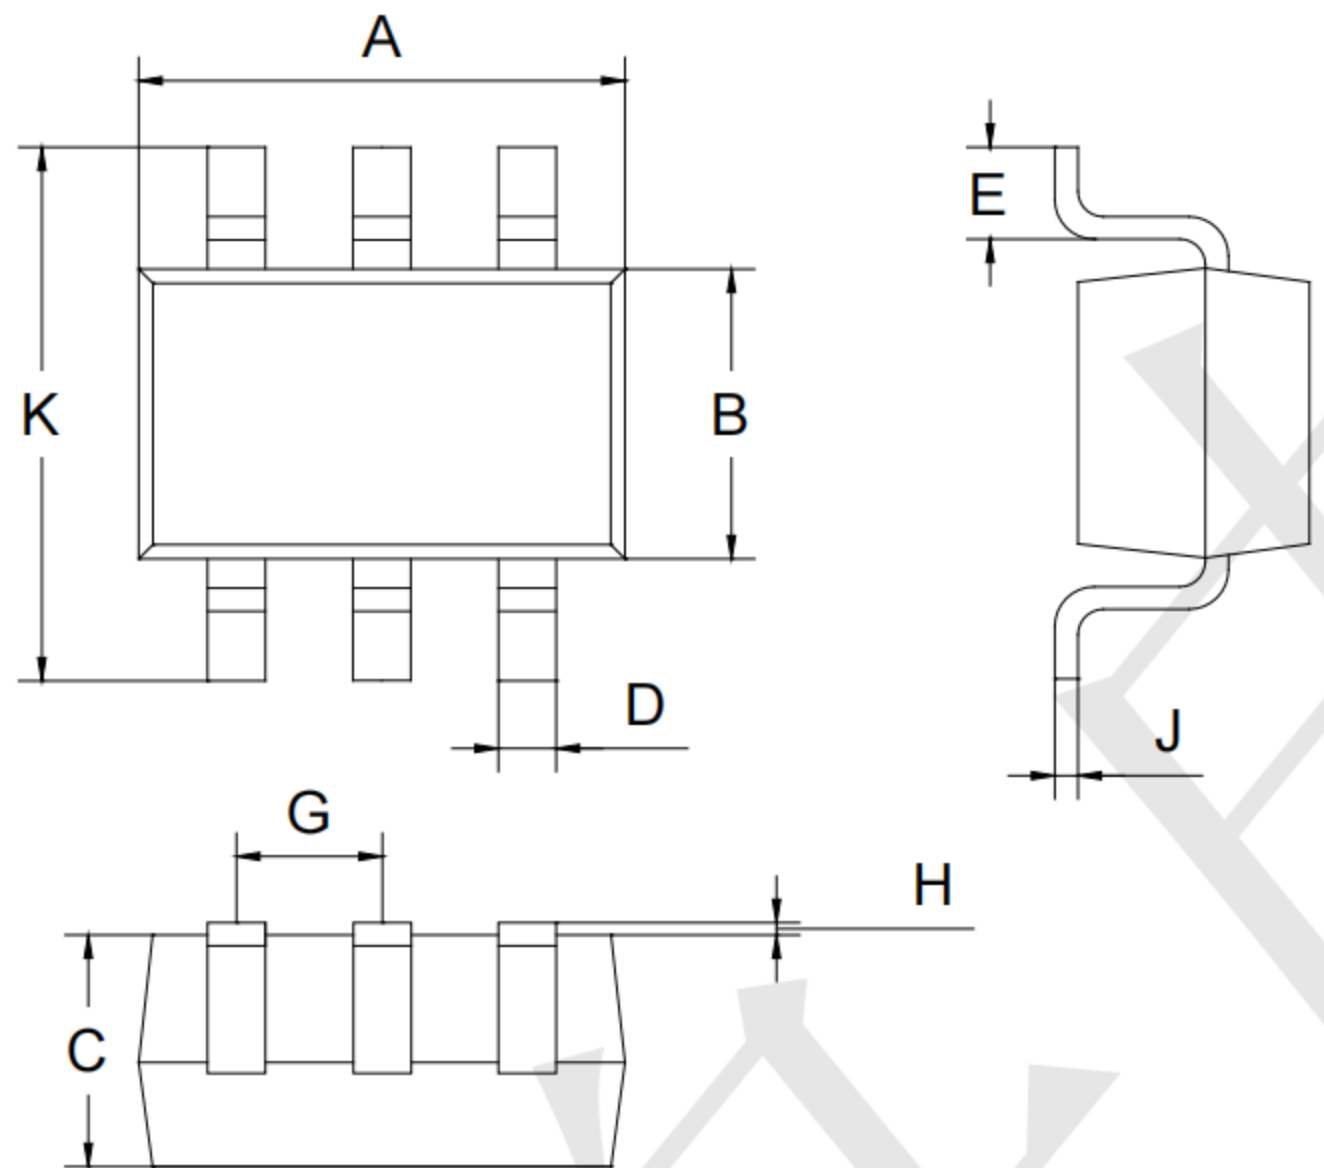

SOT-363		
Dim	Min	Max
A	2.00	2.20
B	1.15	1.35
C	0.85	1.05
D	0.15	0.35
E	0.25	0.40
G	0.60	0.70
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

Mounting Pad Layout-SOT363 (unit: mm)

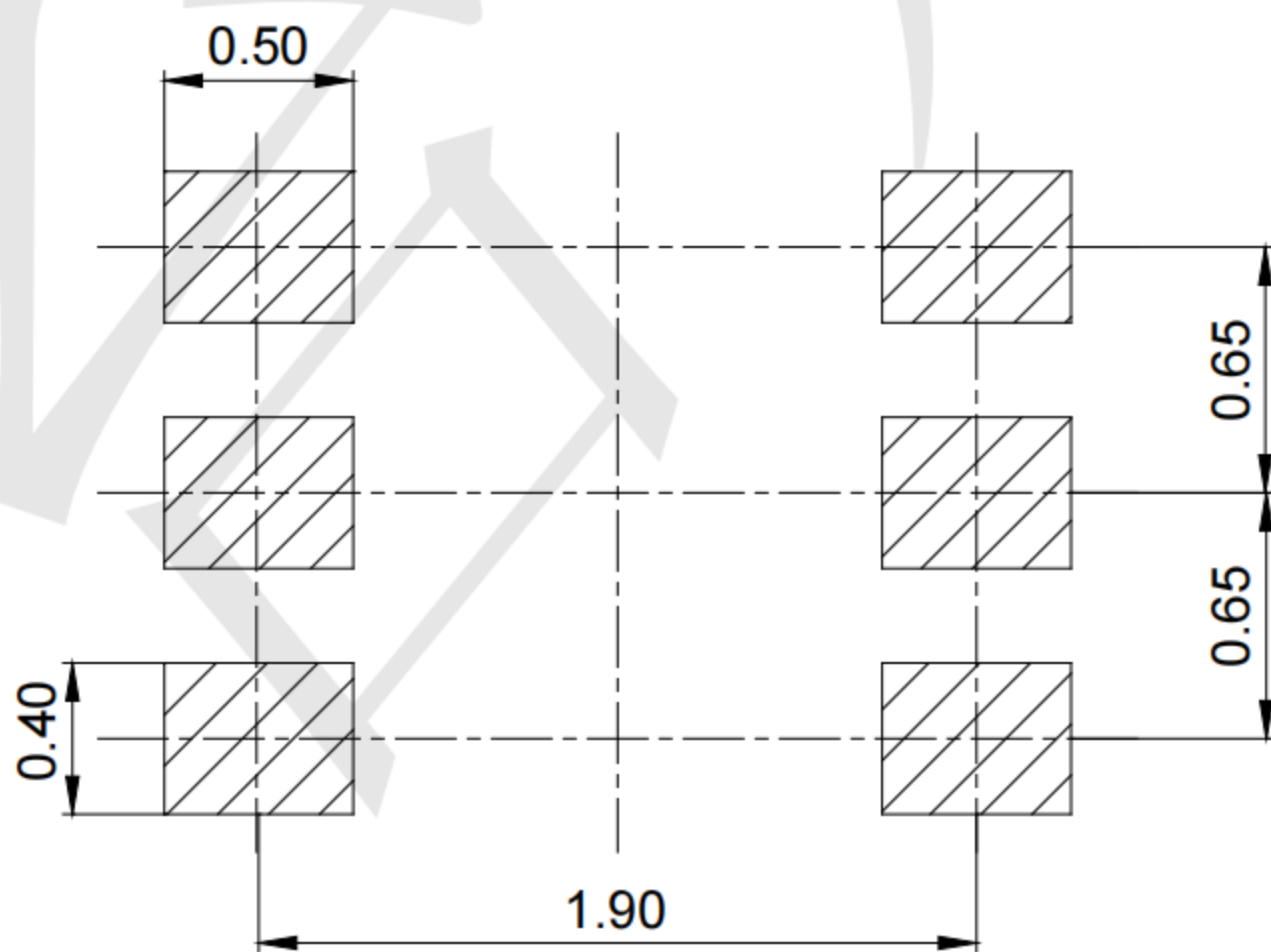

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [TECH PUBLIC manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N4403](#) [2N6728](#)
[2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-](#)
[TL-E](#) [MCH4021-TL-E](#) [Jantx2N5416](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[TTA1452B,S4X\(S](#) [2N3879](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANTX2N3735](#) [JANSR2N2222AUB](#)
[CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#)
[MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#)