

**Features**

- $V_{DS}$  -20V
- $I_D$  -1.4A
- $R_{DS(ON)}$ ( at  $V_{GS}=2.5V$ ) <140m $\Omega$
- $R_{DS(ON)}$ ( at  $V_{GS}=4.5V$ ) <100m $\Omega$

**Applications**


- Battery protection
- Load switch
- Power management

**Ordering Information**

Part Number	Qty per Reel	Reel Size
TPCJ2101	3000	7"



SOT323

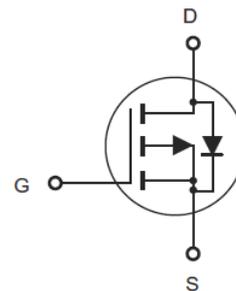


**Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$  unless otherwise specified)**

Parameter	Symbol	Value	Unit
Drain-source voltage	$V_{DS}$	-20	V
Gate-source voltage	$V_{GS}$	$\pm 8$	V
Continuous drain current	$I_D$	-1.4	A
Pulsed drain current ( $t_p=10\mu\text{s}$ )	$I_{DM}$	-3.0	
Power dissipation	$P_D$	0.29	W
Thermal resistance from junction to ambient	$R_{\theta JA}$	431	$^\circ\text{C}/\text{W}$
Junction temperature range	$T_J$	150	$^\circ\text{C}$
Storage temperature range	$T_{STG}$	-50 ~ +150	$^\circ\text{C}$

**Electrical Characteristics** ( $T_A=25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
<b>OFF CHARACTERISTICS</b>						
Drain-source breakdown voltage	$V_{DSS}$	$V_{GS} = 0V, I_D = -250\mu A$	-20			V
Gate-source leakage	$I_{GSS}$	$V_{DS} = 0V, V_{GS} = \pm 8V$			$\pm 100$	nA
Zero gate voltage drain current	$I_{DSS}$	$V_{DS} = -20V, V_{GS} = 0V$			-1	$\mu A$
<b>OFF CHARACTERISTICS (note 1)</b>						
Gate-source threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\mu A$	-0.45	-0.7		V
Drain-source on-state resistance	$R_{DS(on)}$	$V_{GS} = -4.5V, I_D = -1.0A$			100	m $\Omega$
		$V_{GS} = -2.5V, I_D = -0.5A$			140	
		$V_{GS} = -1.8V, I_D = -0.3A$			210	
<b>CHARGE AND CAPACITANCES (note 3)</b>						
Input capacitance	$C_{iss}$	$V_{DS} = -8.0V, V_{GS} = 0V,$ $f = 1MHz$		640		pF
Output capacitance	$C_{oss}$			120		
Reverse transfer capacitance	$C_{rss}$			82		
<b>SWITCHING CHARACTERISTICS (note 2,3)</b>						
Turn-on delay time	$t_{d(on)}$	$V_{GS} = -4.5V, V_{DD} = -4.0V$ $I_D = -1.0A, R_g = 6.2\Omega$		6.2		nS
Rise time	$t_r$			15		
Turn-off delay time	$t_{d(off)}$			26		
Fall time	$t_f$			18		
<b>DRAIN-SOURCE BODY DIODE CHARACTERISTICS</b>						
Forward Diode Voltage	$V_{SD}$	$V_{GS} = 0V, I_S = -0.3A$		-0.62	-1.2	V

### Outline Drawing - SOT323

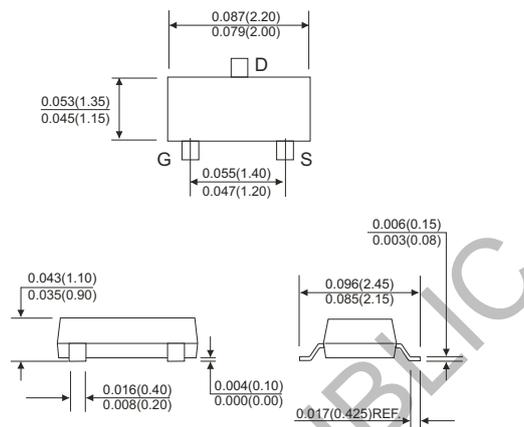

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [TECH PUBLIC](#) manufacturer:*

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)  
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)  
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)  
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)  
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)  
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)