

## Features

- ◆ 250W peak pulse power(8/20 $\mu$ s)
- ◆ Protects two bi-directional lines
- ◆ Ultra low leakage: nA level
- ◆ Operating voltage: 36V
- ◆ Low clamping voltage
- ◆ Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test  
Air discharge:  $\pm$ 30kV  
Contact discharge:  $\pm$ 30kV
  - IEC61000-4-4 (EFT) 40A (5/50ns)
  - IEC61000-4-5 (Lightning) 4A (8/20 $\mu$ s)
- ◆ RoHS Compliant


## Mechanical Characteristics

- ◆ Package: SOT-23
- ◆ Lead Finish: Matte Tin
- ◆ Case Material: “Green” Molding Compound.
- ◆ UL Flammability Classification Rating 94V-0
- ◆ Moisture Sensitivity: Level 3 per J STD 020
- ◆ Shipping Qty :3000pcs/7Inch Tape & Reel

## Applications

- ◆ Cellular Handsets and Accessories
- ◆ Notebooks and Handhelds
- ◆ Portable Instrumentation
- ◆ Set Top Box
- ◆ Industrial Controls

## Dimensions and Pin Configuration



**Marking: P36KC**

**P** = TECH PUBLIC LOGO

**Absolute Maximum Ratings** (Tamb=25°C unless otherwise specified)


| Parameter                       | Symbol           | Value       | Unit |
|---------------------------------|------------------|-------------|------|
| Peak Pulse Power (8/20μs)       | Ppk              | 250         | W    |
| Peak Pulse Current (8/20μs)     | I <sub>PP</sub>  | 4           | A    |
| ESD per IEC 61000-4-2 (Air)     | V <sub>ESD</sub> | ± 30        | kV   |
| ESD per IEC 61000-4-2 (Contact) |                  | ± 30        |      |
| Operating Temperature Range     | T <sub>J</sub>   | -55 to +125 | °C   |
| Storage Temperature Range       | T <sub>stg</sub> | -55 to +150 | °C   |

**Electrical Characteristics** (TA=25°C unless otherwise specified)


| Parameter               | Symbol           | Min  | Typ | Max | Unit | Test Condition  |
|-------------------------|------------------|------|-----|-----|------|---|
| Reverse Working Voltage | V <sub>RWM</sub> |      |     | 36  | V    |   |
| Breakdown Voltage       | V <sub>BR</sub>  | 39.5 |     |     | V    | I <sub>T</sub> = 1mA  |
| Reverse Leakage Current | I <sub>R</sub>   |      |     | 0.1 | μA   | V <sub>RWM</sub> = 36V                                      |
| Clamping Voltage        | V <sub>C</sub>   |      |     | 48  | V    | I <sub>PP</sub> = 1A (8 x 20μs pulse)                       |
| Clamping Voltage        | V <sub>C</sub>   |      |     | 65  | V    | I <sub>PP</sub> = 3.5A (8 x 20μs pulse)                     |
| Junction Capacitance    | C <sub>J</sub>   |      | 13  | 20  | pF   | V <sub>R</sub> =0, f=1MHz, Pin 1 to Pin 3 or Pin 2 to Pin 3 |

**Typical Performance Characteristics (T<sub>A</sub>=25°C unless otherwise Specified)**


**Fig1. 8/20μs Pulse Waveform**

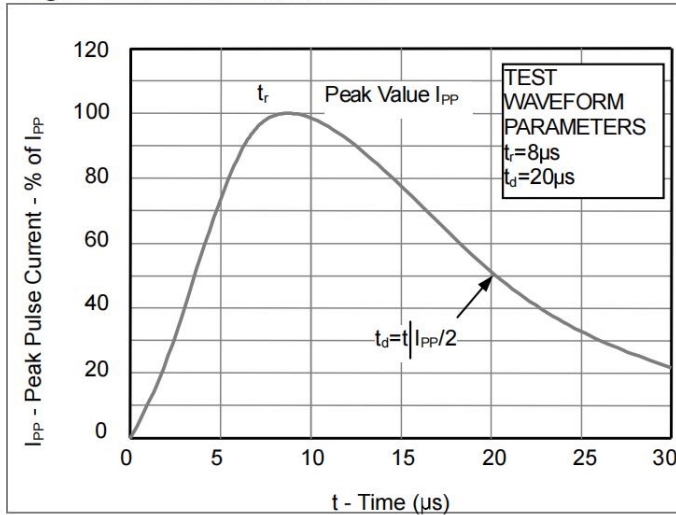


**Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)**

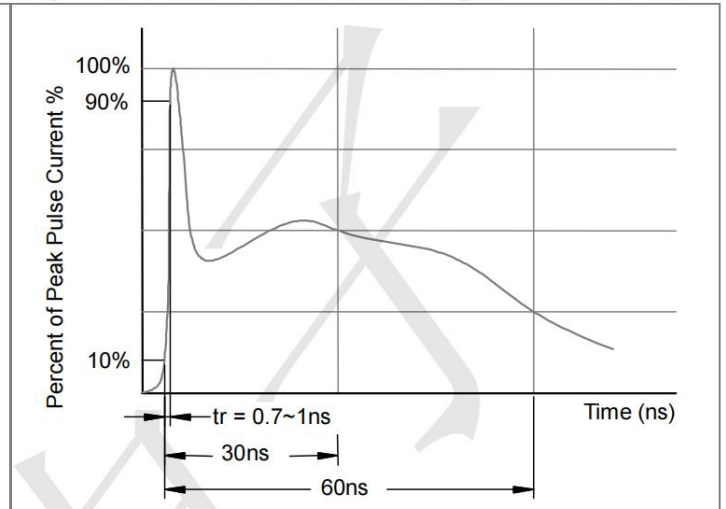


**Fig3. Power Derating Curve**

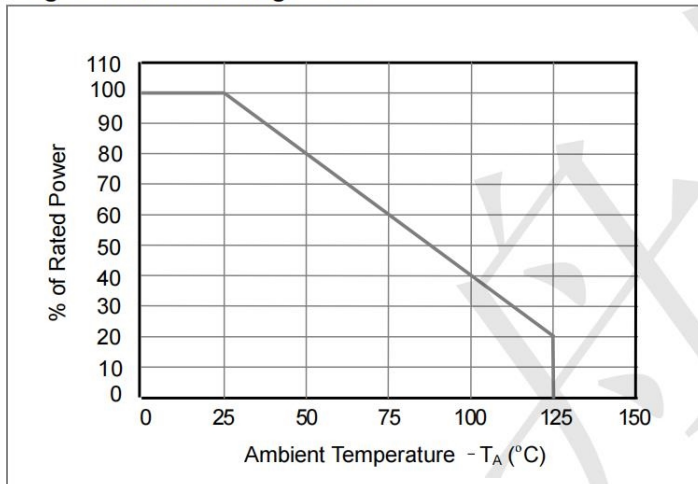

## Outline Drawing - SOT23

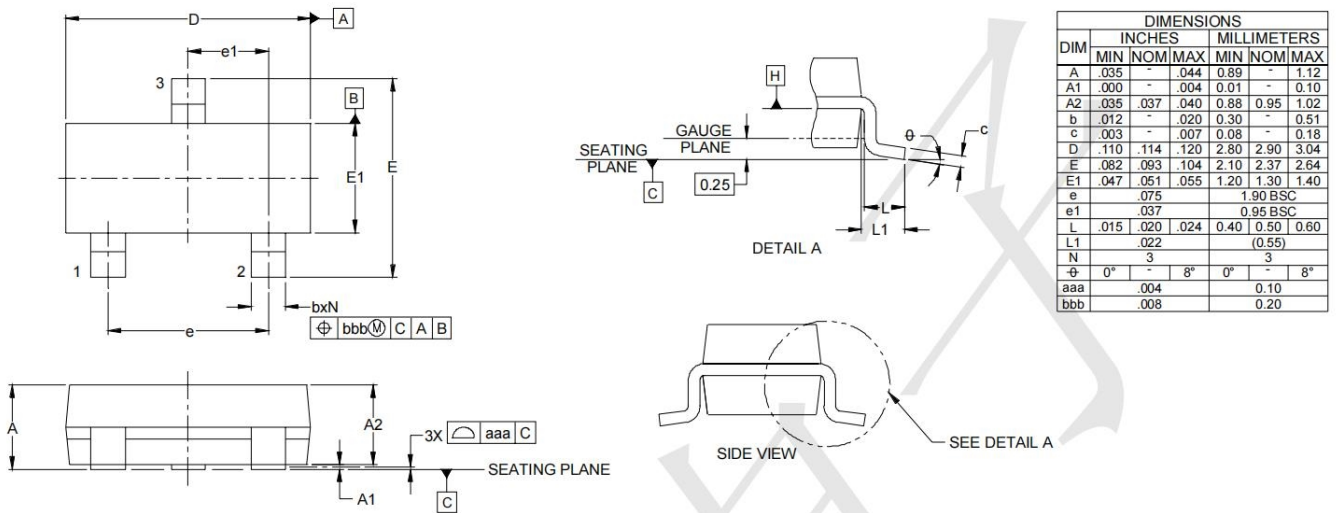

## Land Pattern - SOT23

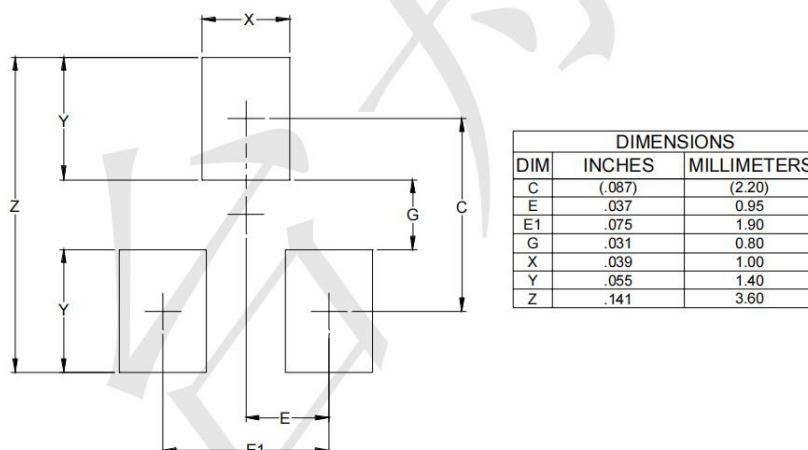

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [TECH PUBLIC](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)  
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-](#)  
[HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#)  
[1SMB33CAT3G-XYZ](#) [MMAD1108/TR13](#) [5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#)