

Features

- Reverse stand-off voltage: 5V max.
- Transient protection for each line according to IEC61000-4-2 (ESD): $\pm 30\text{kV}$ (contact discharge)
IEC61000-4-5 (surge): 5A (8/20 μs)
- Low capacitance: $C_{\text{I/O-GND}} = 0.65\text{pF typ.}$ ($V_{\text{CC}} = \text{floated}$)
 $C_{\text{I/O-GND}} = 0.35\text{pF typ.}$ ($V_{\text{CC}} = 5\text{V}$)
- Ultra-low leakage current: $I_{\text{R}} < 1\text{nA typ.}$
- Low clamping voltage: $V_{\text{CL}} = 16.5\text{V @ } I_{\text{PP}} = 16\text{A (TLP)}$
- Solid-state silicon technology

Mechanical Characteristics

- JEDEC SOT23-6L package
- Molding compound flammability rating: UL 94V-0


Applications

- USB 2.0
- HDMI 1.3
- SATA and eSATA
- DVI
- IEEE 1394
- PCI Express
- Portable Electronics
- Notebooks

Ordering Information

Part Number	Qty per Reel	Reel Size
TPESD0504S6-A	3000	7"

Dimensions and Pin Configuration

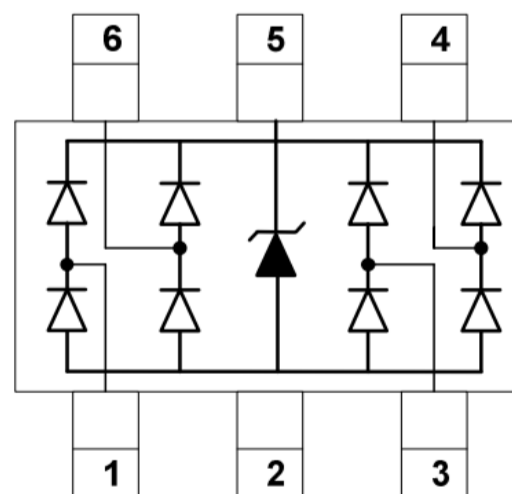

Marking: C16PJ

Absolute Maximum Ratings (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Rating	Unit
Peak pulse power ($t_p = 8/20\mu s$)	P_{pk}	150	W
Peak pulse current ($t_p = 8/20\mu s$)	I_{PP}	5	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 30	kV
ESD according to IEC61000-4-2 contact discharge		± 30	
Junction temperature	T_J	125	°C
Operating temperature	T_{OP}	-40~85	°C
Lead temperature	T_L	260	°C
Storage temperature	T_{STG}	-55~150	°C

Electrical Characteristics (TA=25°C unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Reverse stand-off voltage	V_{RWM}				5.0	V
Reverse leakage current	I_R	$V_{RWM} = 5V$			1	μA
Reverse breakdown voltage	V_{BR}	$I_{BR} = 1mA$	7.0	8.0	9.0	V
Forward voltage	V_F	$I_F = 10mA$	0.6	0.9	1.2	V
Clamping voltage ¹⁾	V_{CL}	$I_{PP} = 16A, t_p = 100ns$		16.5		V
Dynamic resistance ¹⁾	R_{DYN}			0.45		Ω
Clamping voltage ²⁾	V_{CL}	$I_{PP} = 1A, t_p = 8/20\mu s$			10	V
		$I_{PP} = 5A, t_p = 8/20\mu s$			15	V
Junction capacitance	$C_{I/O-GND}$	$V_R = 0V, f = 1MHz, V_{CC} = \text{floated},$ Any I/O to GND		0.65	1.0	pF
		$V_R = 0V, f = 1MHz, V_{CC} = 5V,$ Any I/O to GND		0.35	0.50	pF
	$C_{I/O-I/O}$	$V_R = 0V, f = 1MHz,$ Any I/O to I/O		0.35	0.50	pF

Characteristic Curves

Fig1. 8/20 μ s Pulse Waveform

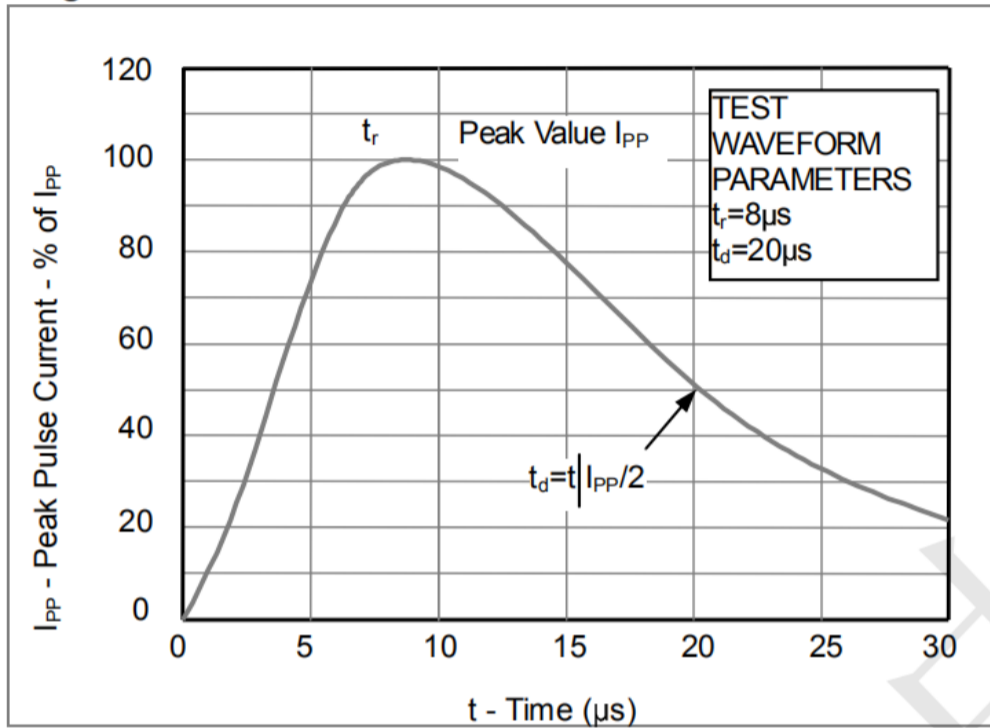


Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)



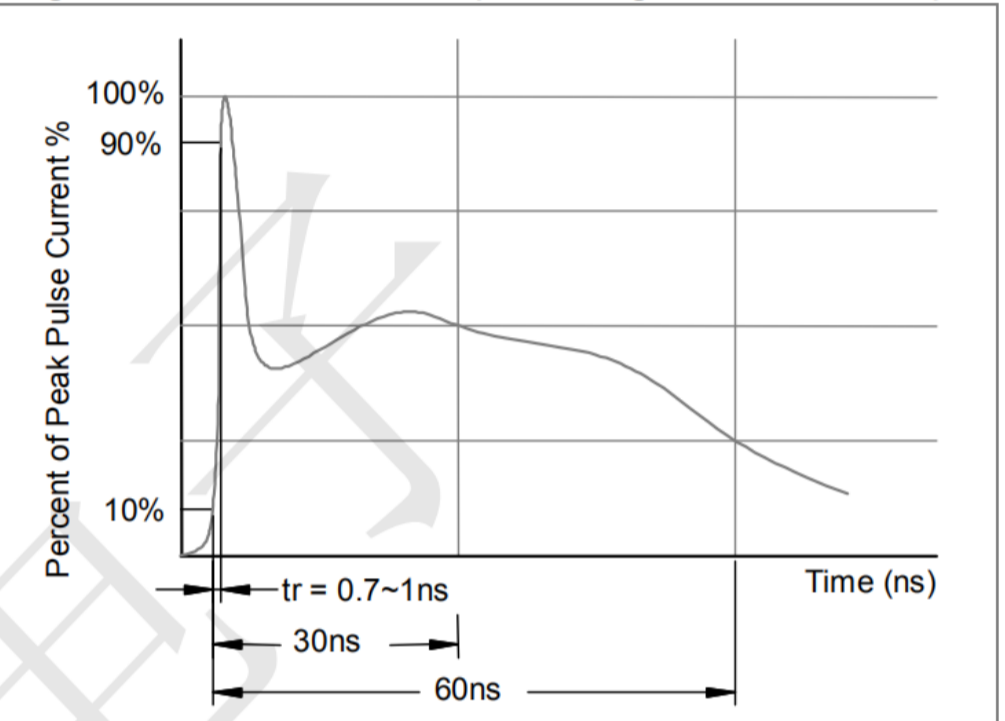



Fig3. Power Derating Curve

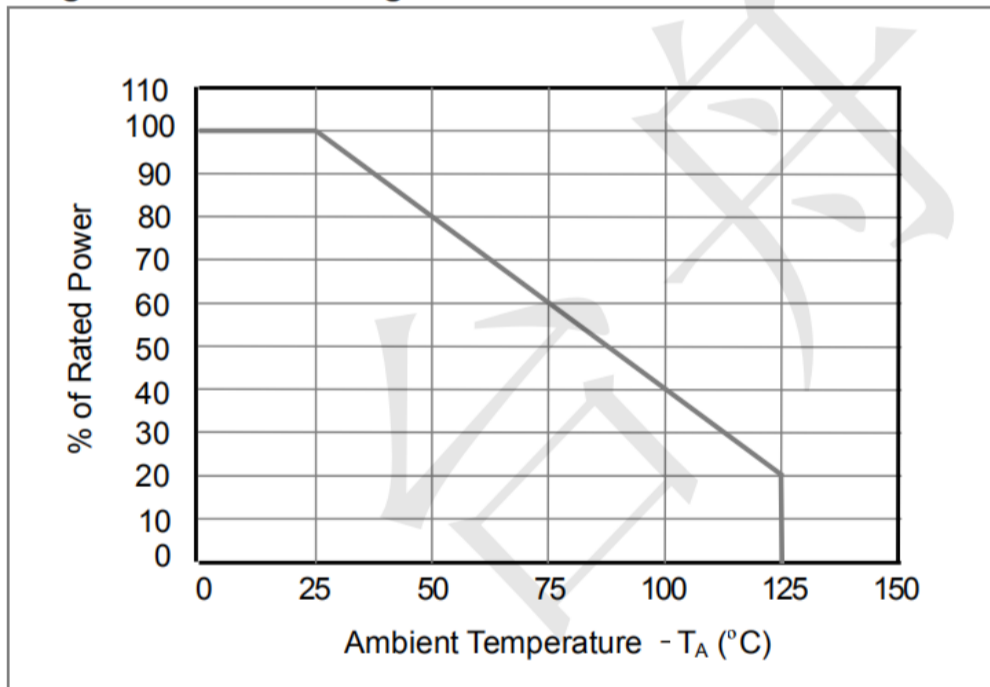

Outline Drawing - SOT23-6

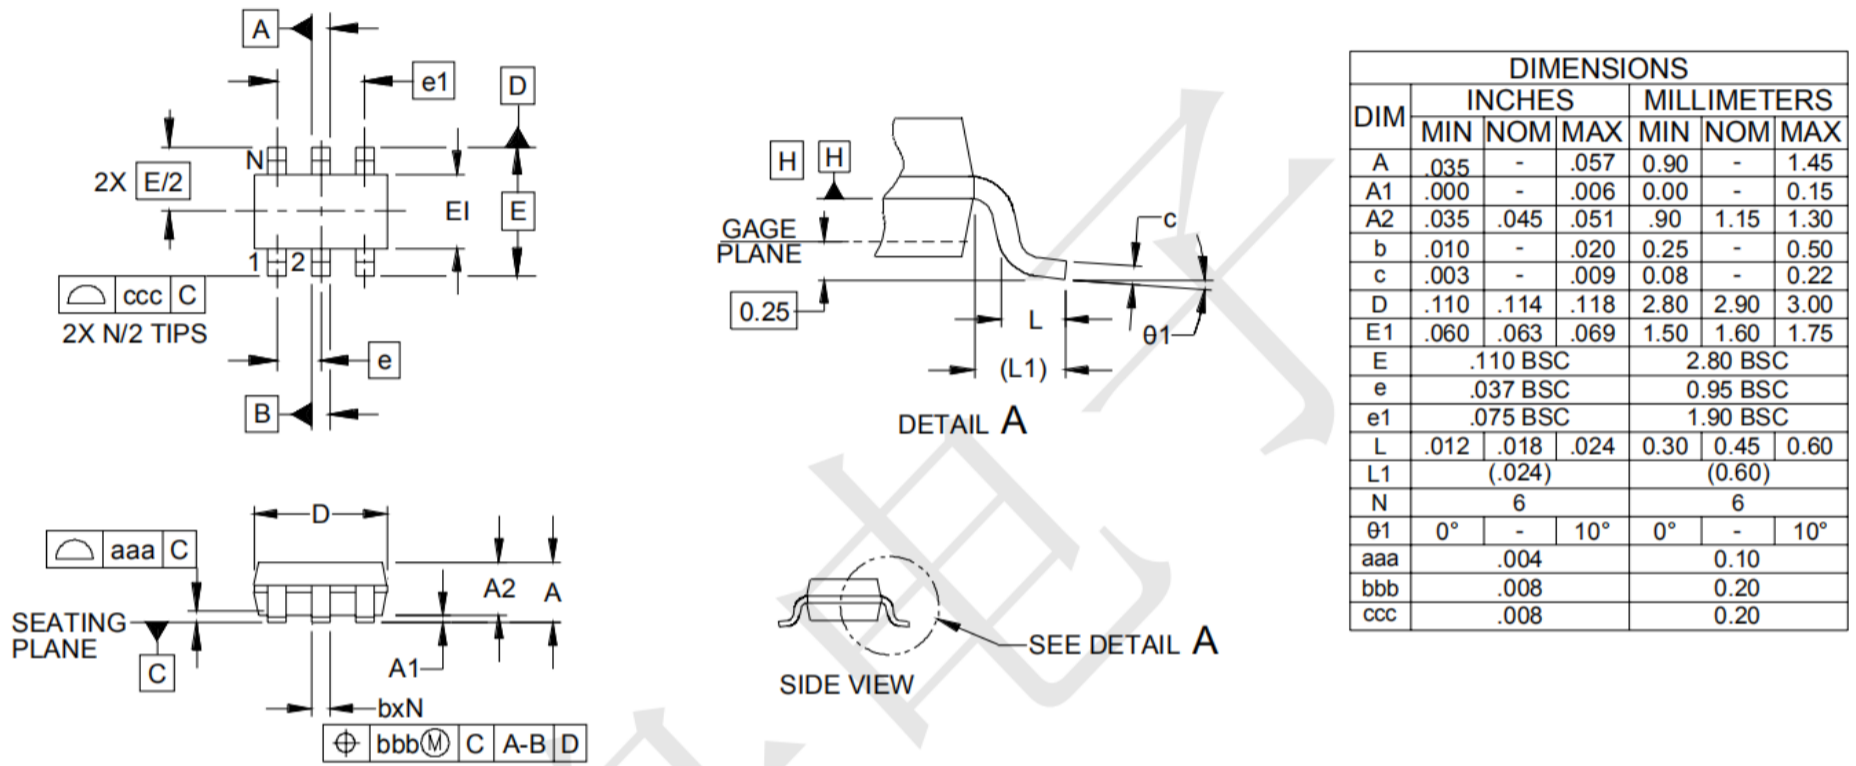

Land Pattern - SOT23-6

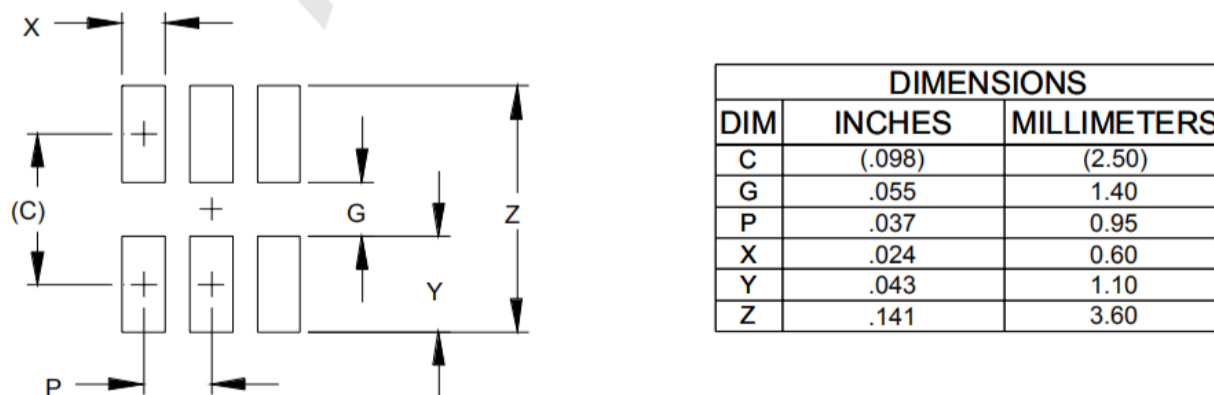

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [TECH PUBLIC](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#)
[CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [MMAD1108/TR13](#)
[5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#) [5KP90A](#) [5KP90CA](#)