


Product Summary

V_{DS}	$R_{DS(ON)}$ MAX	I_D MAX
250V	1.3Ω	2A


Application

- Load/Power Switching
- Interfacing Switching
- Logic Level Shift

Package and Pin Configuration



Circuit diagram



Marking: 2N20

Maximum Ratings (@ $T_C = 25^\circ\text{C}$ unless otherwise specified)






Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	250	V
Gate-Source Voltage	V_{GS}	±20	
Continuous Drain Current	$I_{D@TC=25^\circ\text{C}}$	2.0	A
Continuous Drain Current	$I_{D@TC=100^\circ\text{C}}$	1.0	
Pulsed Drain Current ①	I_{DM}	8	
Continuous Source Current	I_S	2	
Single Pulse Avalanche Energy	EAS	1.25	mJ
Power Dissipation ②	PD	1.5	W
Thermal Resistance from Junction to Ambient ($t \leq 5\text{s}$)	$R_{\theta JA}$	85	$^\circ\text{C/W}$
Operating Junction	T_J	-55~+150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55~+151	

Electrical Characteristics (@ T_c = 25°C unless otherwise specified)



Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static Parameters ③						
Drain-Source Breakdown Voltage	BVDSS	VGS = 0V, ID = 250μA	250			V
Gate Threshold Voltage	VGS(th)	VDS = VGS, ID = 250μA	1.5	2.2	3	V
Gate-Body leakage Current	IGSS	VDS = 0V, VGS = ±20V			±100	nA
Zero Gate Voltage Drain Current	IDSS	VDS = 150V, VGS = 0V			1	μA
Static Drain-Source On-Resistance	RDS(on)	VGS = 10V, ID = 4A		1.3	1.7	Ω
Forward Transconductance	gFs	VDS = 10V, ID = 4A		25		S
Diode Forward Voltage	VSD	IS = 1A, VGS = 0V			1.2	V
Dynamic Parameters ④						
Input Capacitance	Ciss	VDS = 15V, VGS = 0V, f = 1MHz		1097		pF
Output Capacitance	Coss			25		pF
Reverse Transfer Capacitance	Crss			14		pF
Total Gate Charge	Qg	VGS = 4.5V, VDS = 200V, ID = 1.5A		17		nC
Gate Source Charge	Qgs			3		nC
Gate Drain Charge	Qgd			12		nC
Gate Resistance	Rg	f = 1MHz		2.45		Ω
Switching Parameters ④						
Turn-On Delay Time	td(on)	VGS = 10V, VDD = 125V, RG = 6Ω, ID = 1A, RG = 1255 Ω		19		ns
Turn-On Rise Time	tr			4		ns
Turn-Off Delay Time	td(off)			48		ns
Turn-Off Fall Time	tf			13		ns




Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

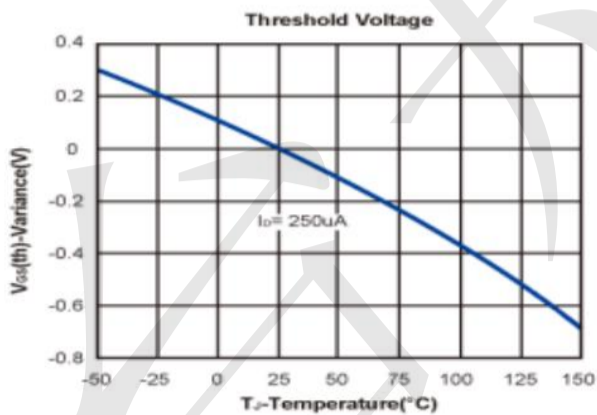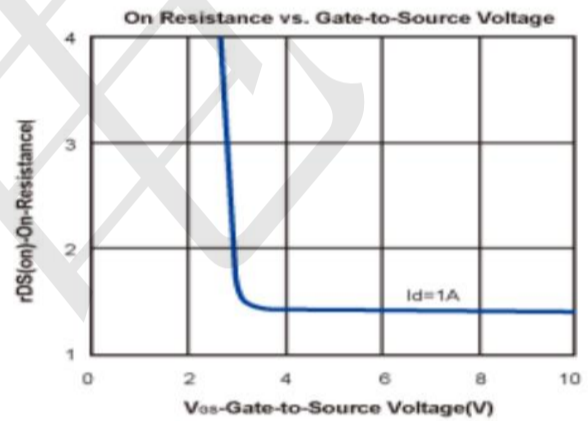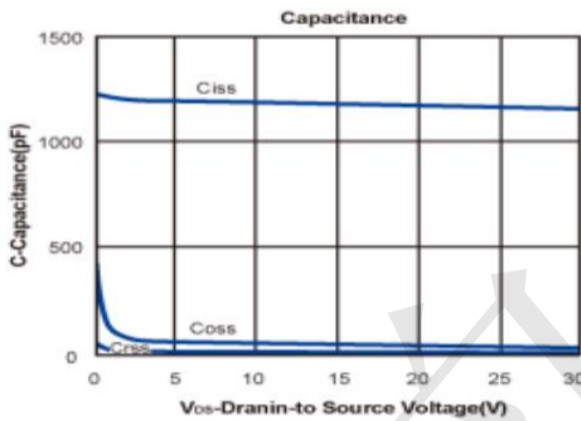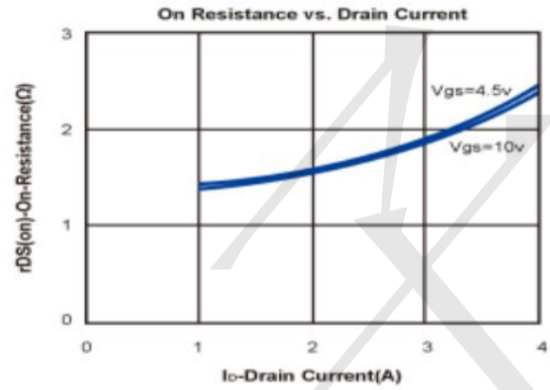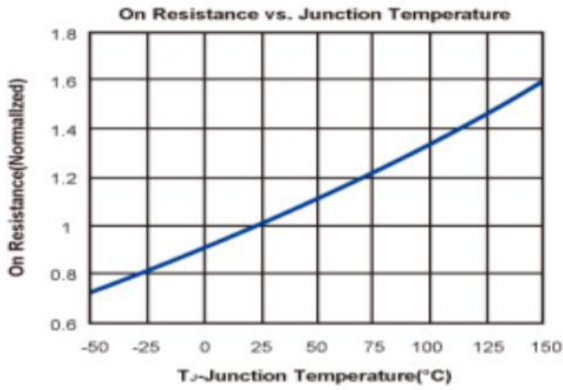

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

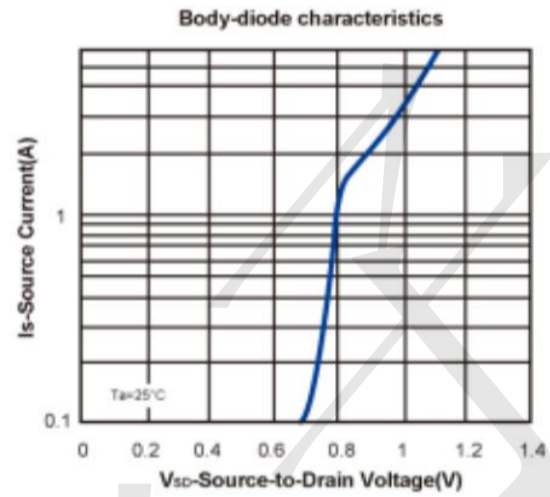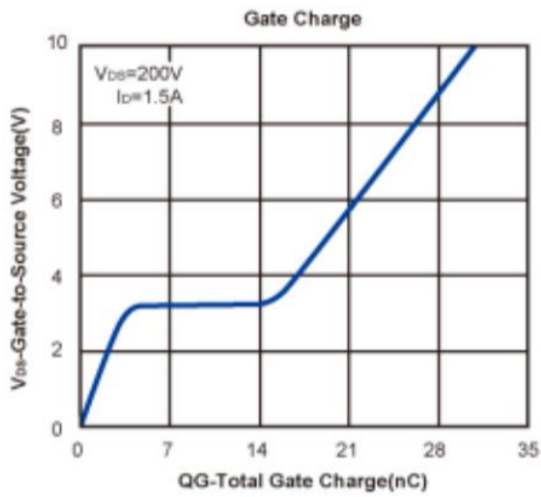


SOT23-3L Package Outline Dimensions (Unit: mm)

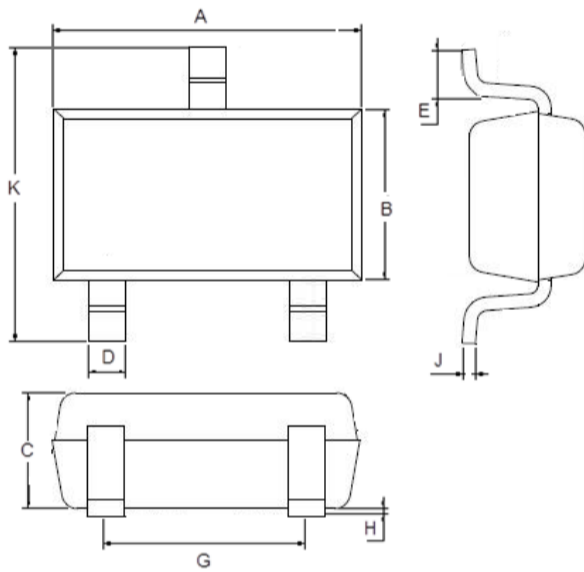

Dimension	Min.	Max.
A	2.80	3.00
B	1.50	1.70
C	1.00	1.20
D	0.35	0.45
E	0.35	0.55
G	1.80	2.00
H	0.02	0.10
J	0.10	0.20
K	2.60	3.00

Mounting Pad Layout (Unit: mm)

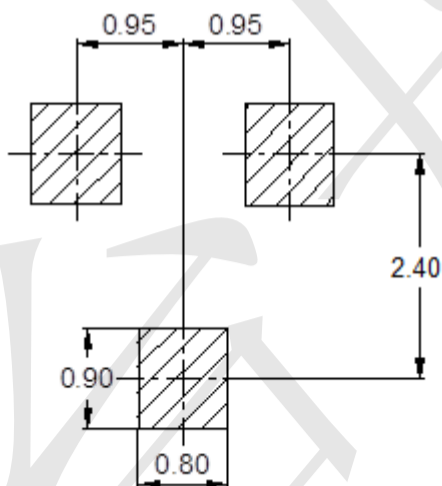

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [TECH PUBLIC](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [TK100A10N1,S4X\(S](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [TK31J60W5,S1VQ\(O](#) [TK31J60W,S1VQ\(O](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#)
[DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#)
[DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [IPS60R360PFD7SAKMA1](#)
[DMN2990UFB-7B](#) [SSM3K35CT,L3F](#) [IPLK60R1K0PFD7ATMA1](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPWS65R035CFD7AXKSA1](#)
[MCQ7328-TP](#) [SSM3J143TU,LXHF](#) [DMN12M3UCA6-7](#) [PJMF280N65E1_T0_00201](#) [PJMF380N65E1_T0_00201](#)
[PJMF280N60E1_T0_00201](#) [PJMF600N65E1_T0_00201](#) [PJMF900N65E1_T0_00201](#)