


Product Summary

- 60V/ 5A
 $R_{DS(ON)} = 25m\Omega (Typ) @ V_{GS} = -10V$
 $R_{DS(ON)} = 30m\Omega (Typ) @ V_{GS} = -4.5V$
- Reliable and Rugged
- Lead Free and Green Devices Available (RoHS Compliant)


Application

- DC-DC Converters.
- Load Switch.
- Power Management.

Package and Pin Configuration



Circuit diagram



Marking:



Absolute Maximum Ratings ($T_A=25^{\circ}C$ unless otherwise noted)


Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	5	A
Pulsed Drain Current (note 1)	I_{DM}	30	A
Power Dissipation	P_D	1.7	A
Thermal Resistance from Junction to Ambient (note 2)	$R_{\theta JA}$	106	$^{\circ}C/W$
Junction Temperature	T_J	150	$^{\circ}C$
Storage Temperature	T_{STG}	-55~+150	$^{\circ}C$

Electrical Characteristics (T_A=25°C unless otherwise noted)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} =0V, I _D =250μA	60			V
Gate-Threshold Voltage ^(Note3)	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	1.0		3.0	V
Gate-Body Leakage Current	I _{GSS}	V _{GS} =± 20V, V _{DS} =0V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =60V, V _{GS} =0V			1	μA
Drain-Source On-Resistance ^(Note3)	R _{DS(on)}	V _{GS} =10V, I _D =3A		25	29	mΩ
		V _{GS} =4.5V, I _D =3A		30	35	
Forward Transconductance ^(Note3)	g _{fs}	V _{DS} =5V, I _D =4.5A	11			S
Dynamic Characteristics^(Note4)						
Input Capacitance	C _{iss}	V _{DS} =30V, V _{GS} =0V, f=1MHz		500		pF
Output Capacitance	C _{oss}		60			
Reverse Transfer Capacitance	C _{rss}		25			
Switching Characteristics^(Note4)						
Total Gate Charge	Q _g	V _{DS} =48V, V _{GS} =10V, I _D =15A		12		nC
Gate-Source Charge	Q _{gs}		4.1			
Gate-Drain Charge	Q _{gd}		4.5			
Turn-on Delay Time	t _{d(on)}	V _{DD} =30V, V _{GS} =10V, I _D =2A, R _G =3Ω, R _L =6.7Ω		5.0		ns
Turn-on Rise Time	t _r		2.6			
Turn-off Delay Time	t _{d(off)}		16.1			
Turn-off Fall Time	t _f		2.3			
Drain-Source Diode Characteristics						
Diode Forward Voltage ^(Note3)	V _{SD}	V _{GS} =0V, I _S =20A			1.2	V
Diode Forward Current ^(Note2)	I _S				20	A
Reverse Recovery Time	t _{rr}	I _F =20A, di/dt=100A/μs ^(Note4)		35		nS
Reverse Recovery Charge	Q _{rr}				53	
Forward Turn-On Time	t _{on}	Intrinsic turn-on time is negligible (turn-on is dominated by LS+LD)				



SOT23-6 Package Information

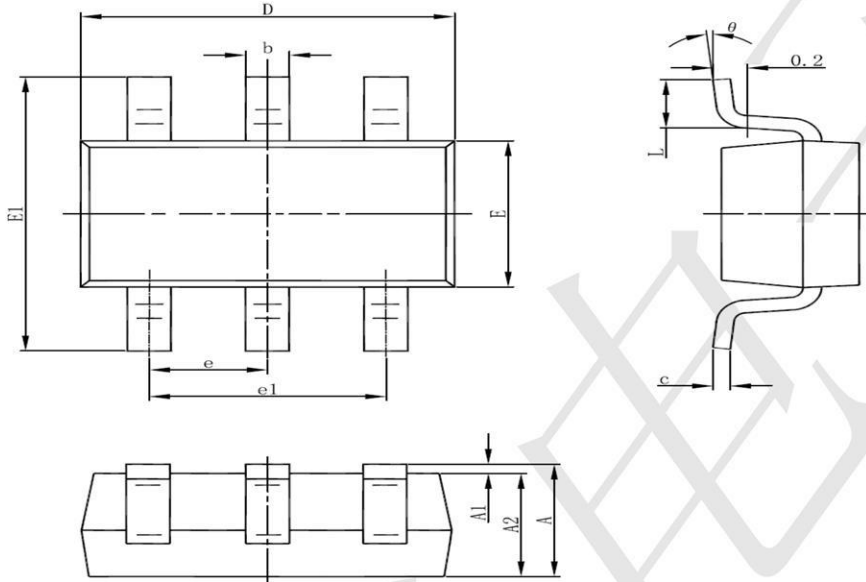

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
theta	0°	8°	0°	8°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [TECH PUBLIC](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [TK100A10N1,S4X\(S](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [TK31J60W5,S1VQ\(O](#) [TK31J60W,S1VQ\(O](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#)
[DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#)
[DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [IPS60R360PFD7SAKMA1](#)
[DMN2990UFB-7B](#) [SSM3K35CT,L3F](#) [IPLK60R1K0PFD7ATMA1](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPWS65R035CFD7AXKSA1](#)
[MCQ7328-TP](#) [SSM3J143TU,LXHF](#) [DMN12M3UCA6-7](#) [PJMF280N65E1_T0_00201](#) [PJMF380N65E1_T0_00201](#)
[PJMF280N60E1_T0_00201](#) [PJMF600N65E1_T0_00201](#) [PJMF900N65E1_T0_00201](#)