

#### 600mA, 2uA, Higt PSRR Voltage Reaulators

#### www.sot23.com.tw

#### Features

- 2µA Ground Current at no Load
- ±2% Output Accuracy
- 600mA Output Current
- 10nA Disable Current (by option)
- Wide Operating Input Voltage Range: 1.2V to 5.5V
- Dropout Voltage: 0.32V at 600mA/ Vout 3.3V
- Support Fixed Output Voltage 1.2V, 1.5V, 1.6V, 1.8V,
   2.5V, 2.8V, 3.0V, 3.3V
- Stable with Ceramic or Tantalum Capacitor
- Current Limit Protection
   Over Temperature Protection
- SOT23-5 Packages

#### Applications

- Portable, Battery Powered Equipment
- Low Power Microcontrollers
- Laptop, Palmtops and PDAs
- Wireless Communication Equipment
- Audio/Video Equipment
- Car Navigation Systems


#### General Descri tion

The TPRT9080 series are a group of low-dropout (LDO) voltage regulators offering the benefits of wide input voltage range from 1.2V to 5.5V, low dropout voltage, low power consumption, and miniaturized packaging. Quiescent current of only 2μA makes these devices ideal for powering the battery-powered, always-on systems that require very little idle=state power dissipation to a longer service life. There is an option of

shutdown mode by selecting the parts with the EN pin and pulling it low. The shutdown current in this mode goes down to only 10nA (typical).

The TPRT9080 series of linear regulators are stable with the ceramic output capacitor over its wide input range from 1.2V to 5.5V and the entire range of output load current ( 0mA to 600mA ).

#### Ordering Information

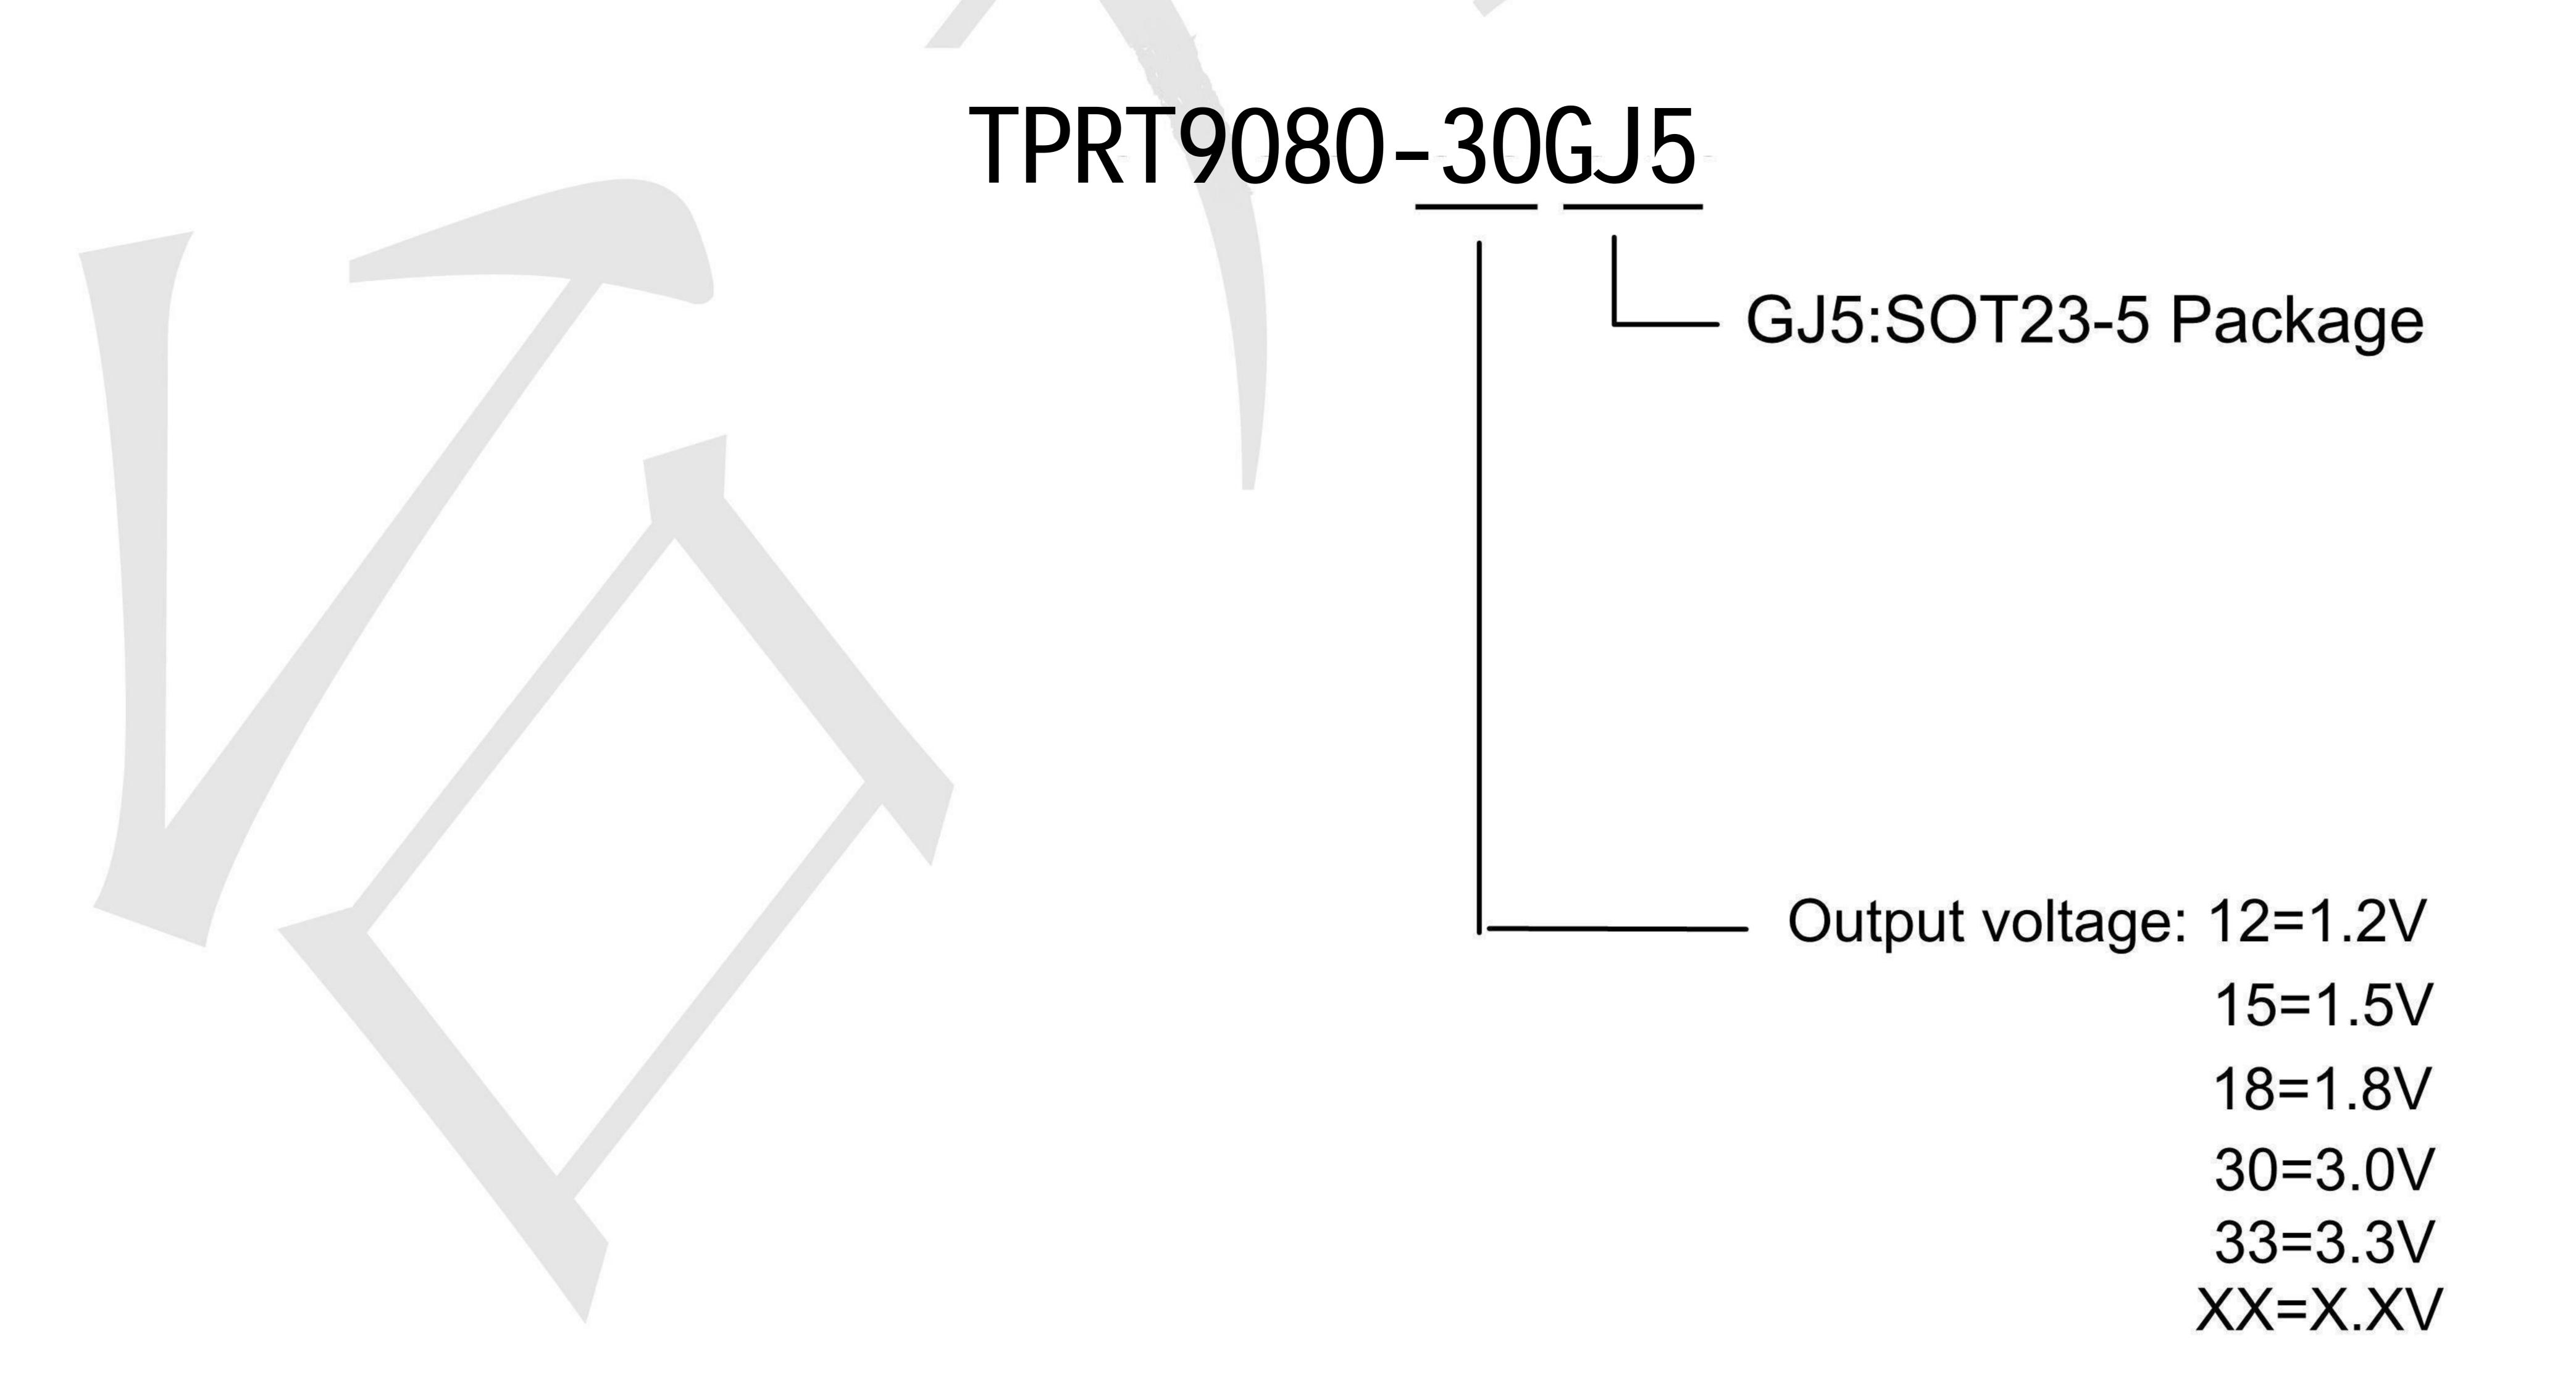




#### 600mA, 2uA, Higt PSRR Voltage Reaulators

www.sot23.com.tw

#### PIN CONFIGURATION

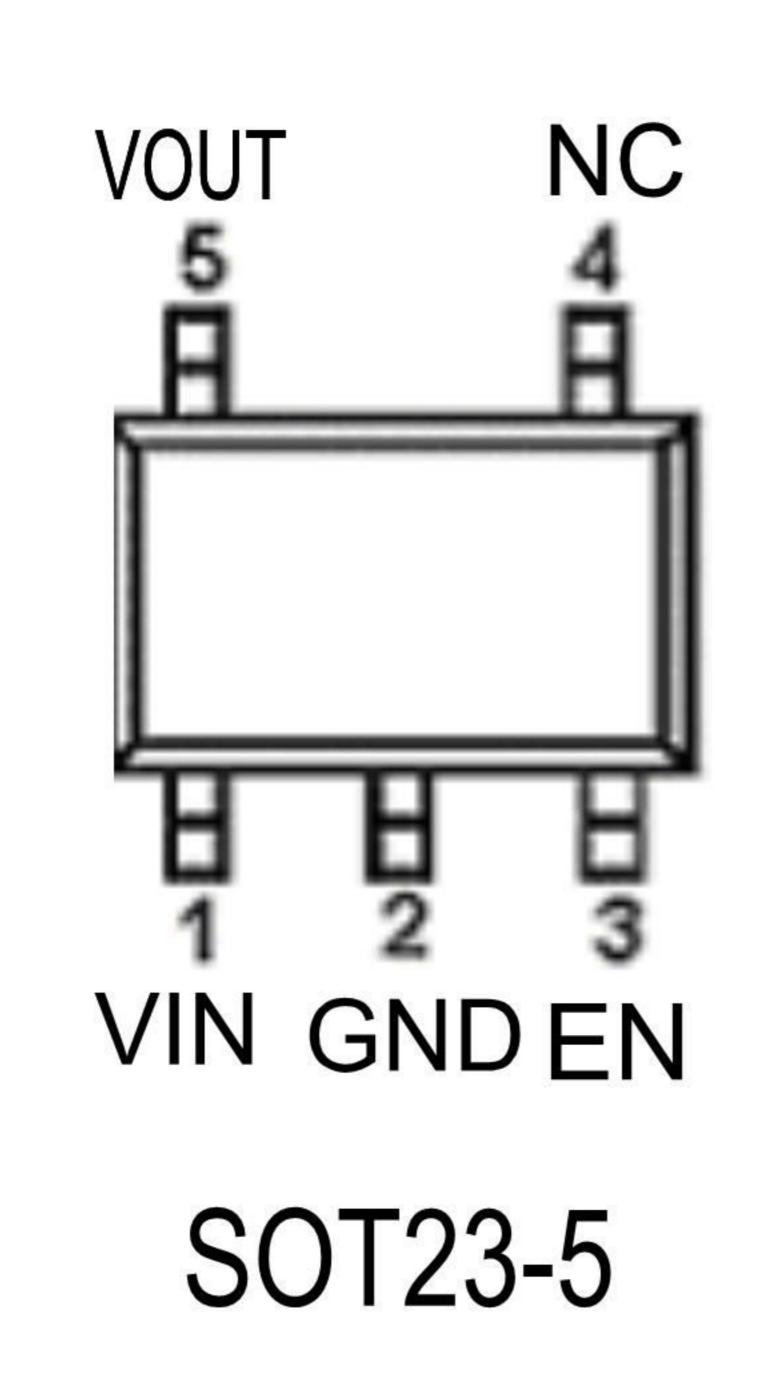

#### Typical Application Circuit

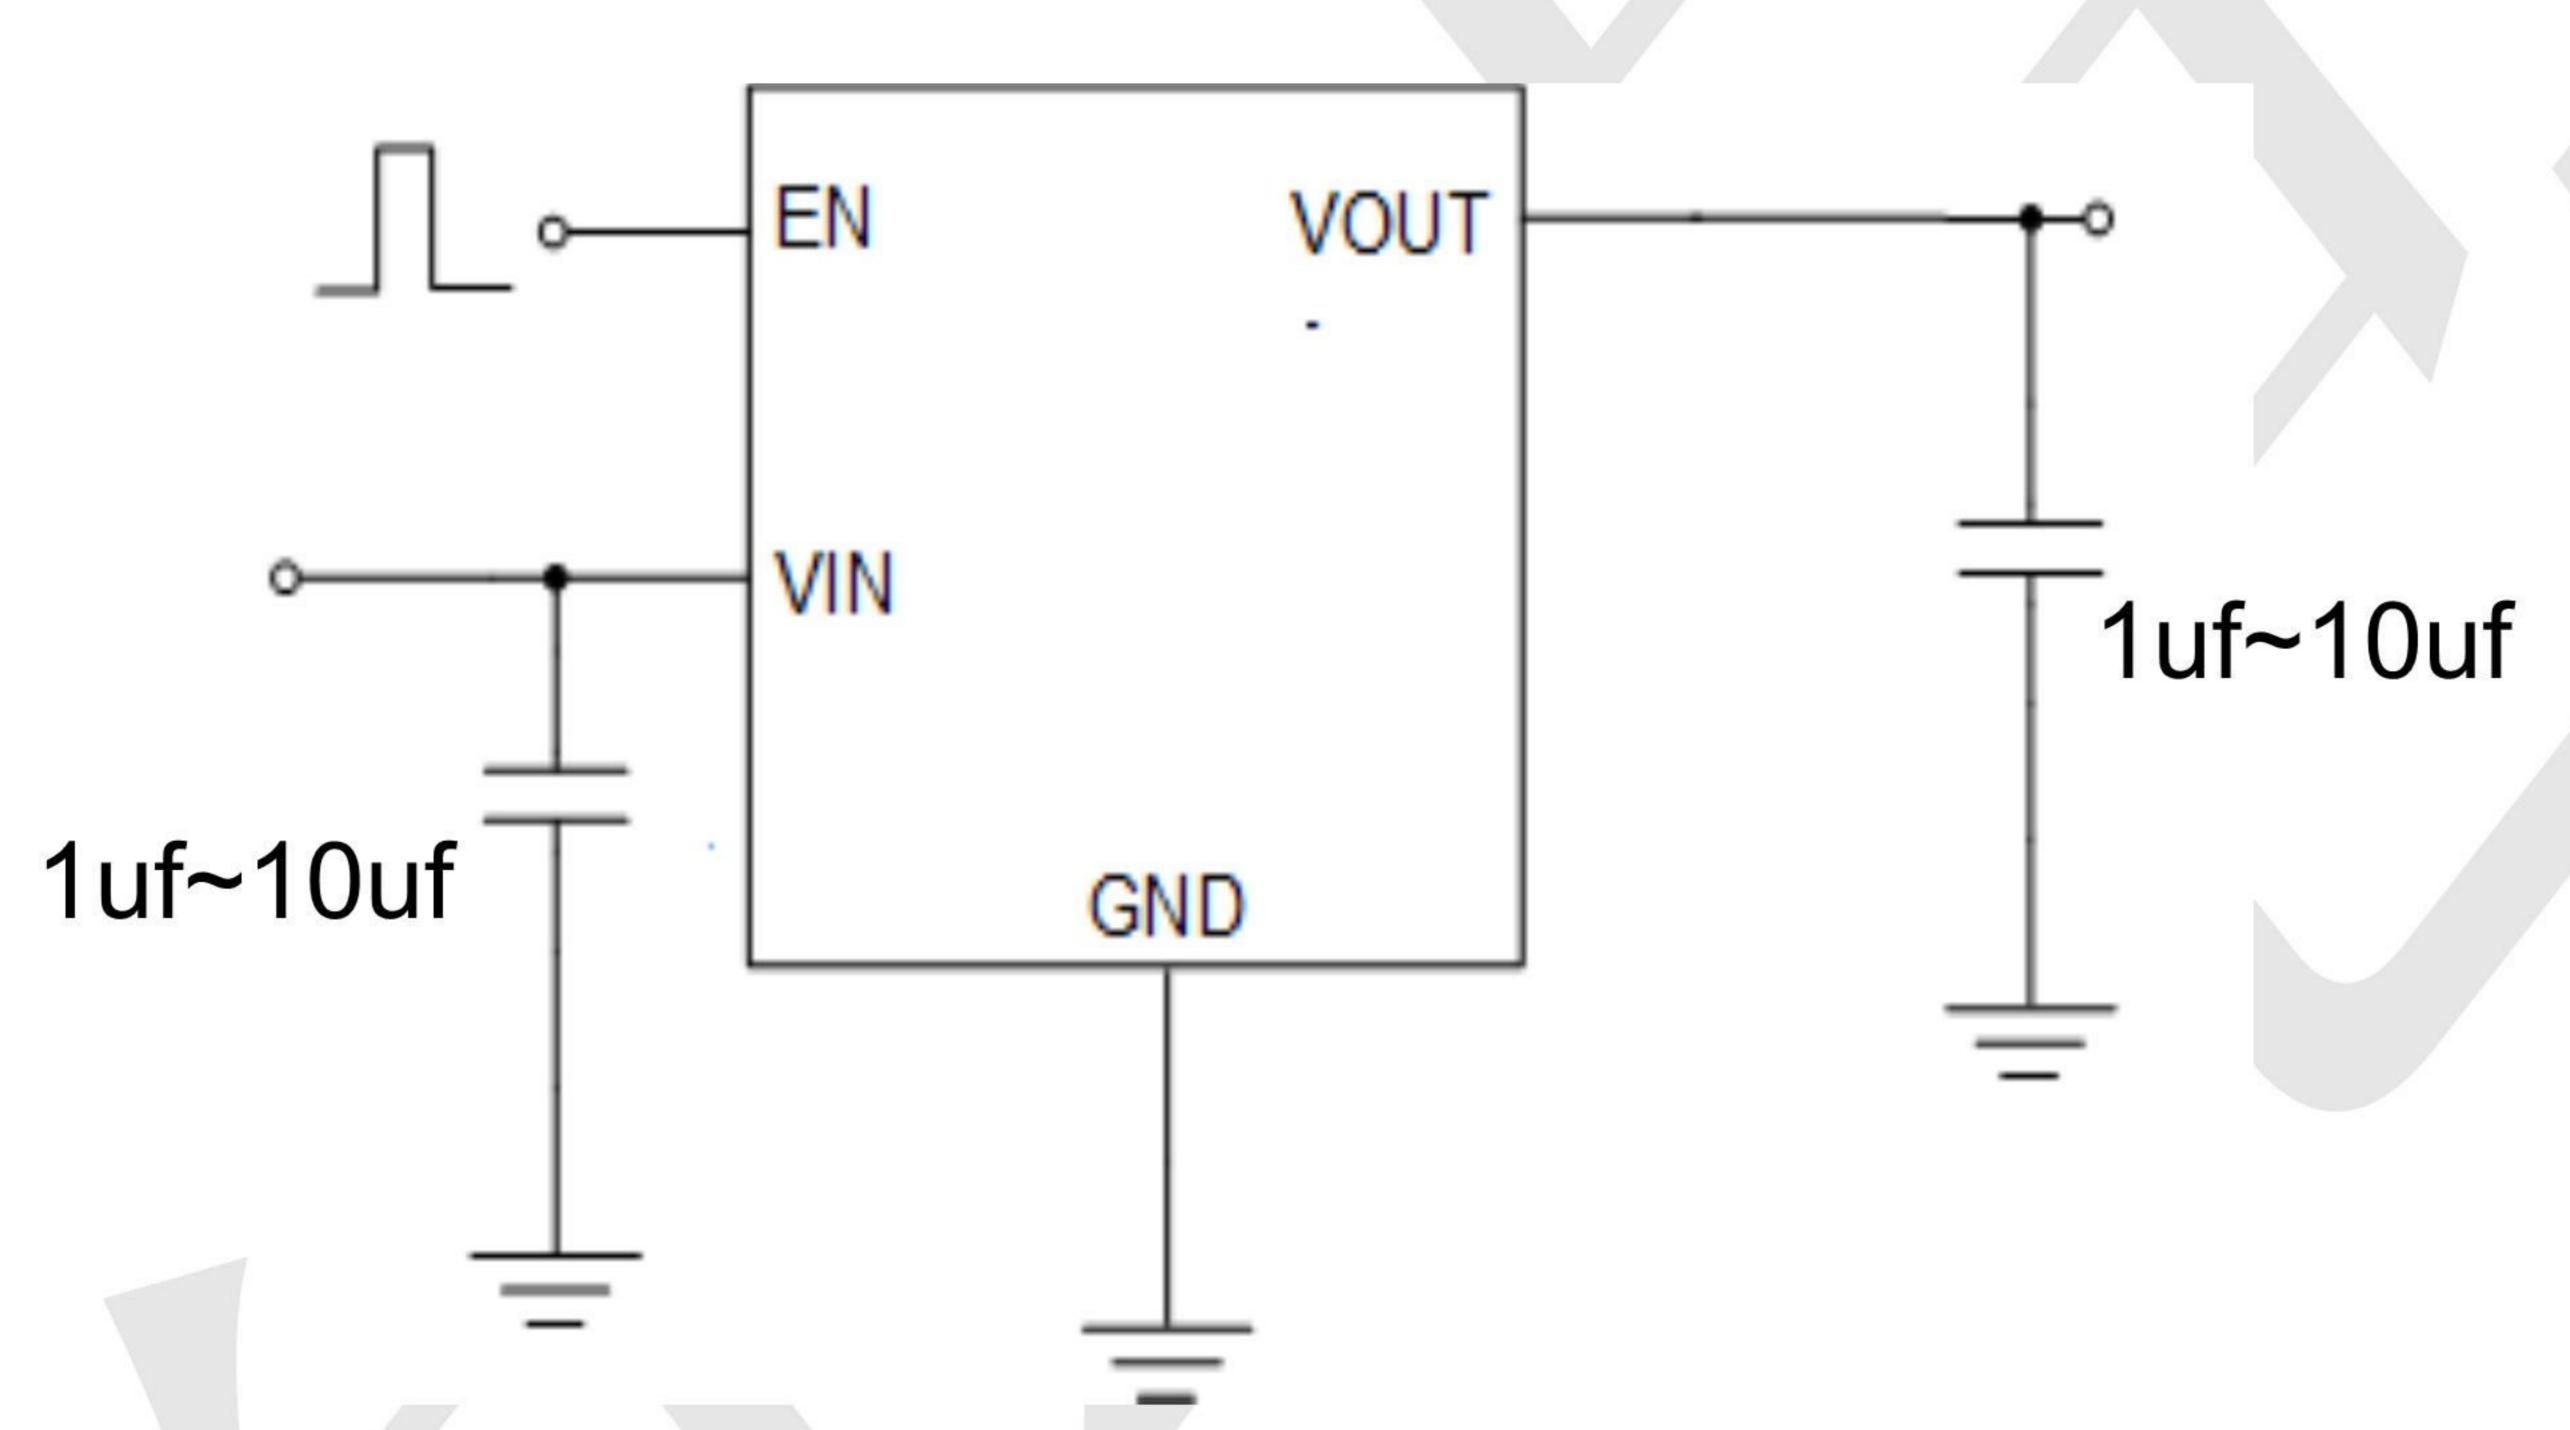


Figure 2: Application circuit of Fixed Vout LDO with enable function

#### ABSOLUTE MAXIMUM RATINGS

VIN Pin to GND Pin Voltage			0.3V to 6.5V
VOUT Pin and EN	oltage		0.3V to 6V
VOUT Pin to VIN Pin Voltage			6V to 0.3V
Storage Temperature Range			60°C~150°C
Lead Temperature (Soldering, 10 sec	c)		
Junction Temperature			150°C
Operating Ambient Temperature Ran	nge T <sub>A</sub>		40°C~85°C
Thermal Resistance Junction to Case, RθJC		SOT23-3	115°C/W
Thermal Resistance Junction to Ambient, RθJA	SOT23-5	115°C/W	
	DFN-4(1x1)	65°C/W	
	DFN-6(2x2)	30°C/W	
	pient, Rθja	SOT23-3	250°C/W
		SOT23-5	250°C/W
		DFN-4(1x1)	195°C/W
	DFN-6(2x2)	165°C/W	



#### 600mA,2uA, Higt PSRR Voltage Reaulators

www.sot23.com.tw

#### Electrical Characteristics (T<sub>A</sub>=25 C unless otherwise noted)

 $(V_{IN} = 5V, V_{EN} = 5V T_A = 25^{\circ}C \text{ unless otherwise specified})$ 

Parameter	Symbol	Test Conditions		Min	Тур	Max	Unit
Supply Voltage	VIN			1.2		5.5	V
DC Output Voltage Accuracy		ILOAD =0	.1mA	-2		2	%
Dropout Voltage (I <sub>LOAD</sub> =600mA) (Note 3)	V <sub>DROP_3V</sub>	V <sub>OUT</sub> ≥ 3V			0.32		
	VDROP_2.8V	V <sub>OUT</sub> = 2.8V			0.36		
	VDROP_2.5V	V <sub>OUT</sub> = 2.5V			0.36		
	VDROP_1.8V	V <sub>OUT</sub> = 1.8V			0.57		
	VDROP_1.5V	V <sub>OUT</sub> = 1.5V			0.71		
	V	V = 1.2V			0.8		
Ground Current	IQ	ILOAD = C	)mA		2		μΑ
Shutdown Ground Current	ISD	$V_{EN} = 0V$			0.01	0.5	
Vout Shutdown Leakage Current	ILEAK	$V_{OUT} = 0$	$V_{OUT} = 0V$		0.01	0.5	μΑ
	V <sub>I</sub> H	EN Rising				2	V
Enable Threshold Voltage	VIL	EN Falling		0.6			
EN Input Current	IEN	$V_{EN} = 5V$			10	100	nA
Line Regulation	ΔLINE	1.5V ≤ \	$I_{LOAD} = 30 \text{mA},$ $1.5 \text{V} \le \text{V}_{IN} \le 5.5 \text{V} \text{ or}$ $(\text{Vout} + 0.2 \text{V}) \le \text{V}_{IN} \le 5.5 \text{V}$		0.2		%
Load Regulation	ΔLOAD	$10\text{mA} \le I_{\text{LOAD}} \le 0.3\text{A}$			0.2		%
Output Current Limit	ILIM	Vout =0		601	1100		mA
		Vout	f = 100Hz		80		
Power Supply Rejection Ratio (I <sub>LOAD</sub> =5mA)	PSRR	=1.2V, V <sub>IN</sub> =	f = 1kHz		75		dB
Output Waltaga Naica		V <sub>IN</sub> =	V <sub>OUT</sub> =0.9V		40		
Output Voltage Noise  (BW = 10Hz to 100kHz, Cout = 1µF,)		3.5V ILOAD =0.1A	V <sub>OUT</sub> =2.8V		50		μVRMS
Thermal Shutdown Temperature	Tsd	I <sub>LOAD</sub> =10mA			155		°C
Thermal Shutdown Hysteresis	$\Delta T_{SD}$				15		°C
Discharge Resistance		$EN = 0V$ , $V_{OUT} = 0.1V$			100		Ω



#### 600mA, 2uA, Higt PSRR Voltage Reaulators

www.sot23.com.tw

- **Note 1.** Stresses beyond those listed "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions may affect device reliability.
- Note 2.  $\theta_{JA}$  is measured at  $T_A = 25^{\circ}C$  on a TECH PUBLICboard.
- Note 3. VDROP = VIN VOUT when the VOUT is 98% of its target value.





#### 600mA,2uA, Higt PSRR Voltage Reaulators

#### www.sot23.com.tw

#### Typical Characteristics

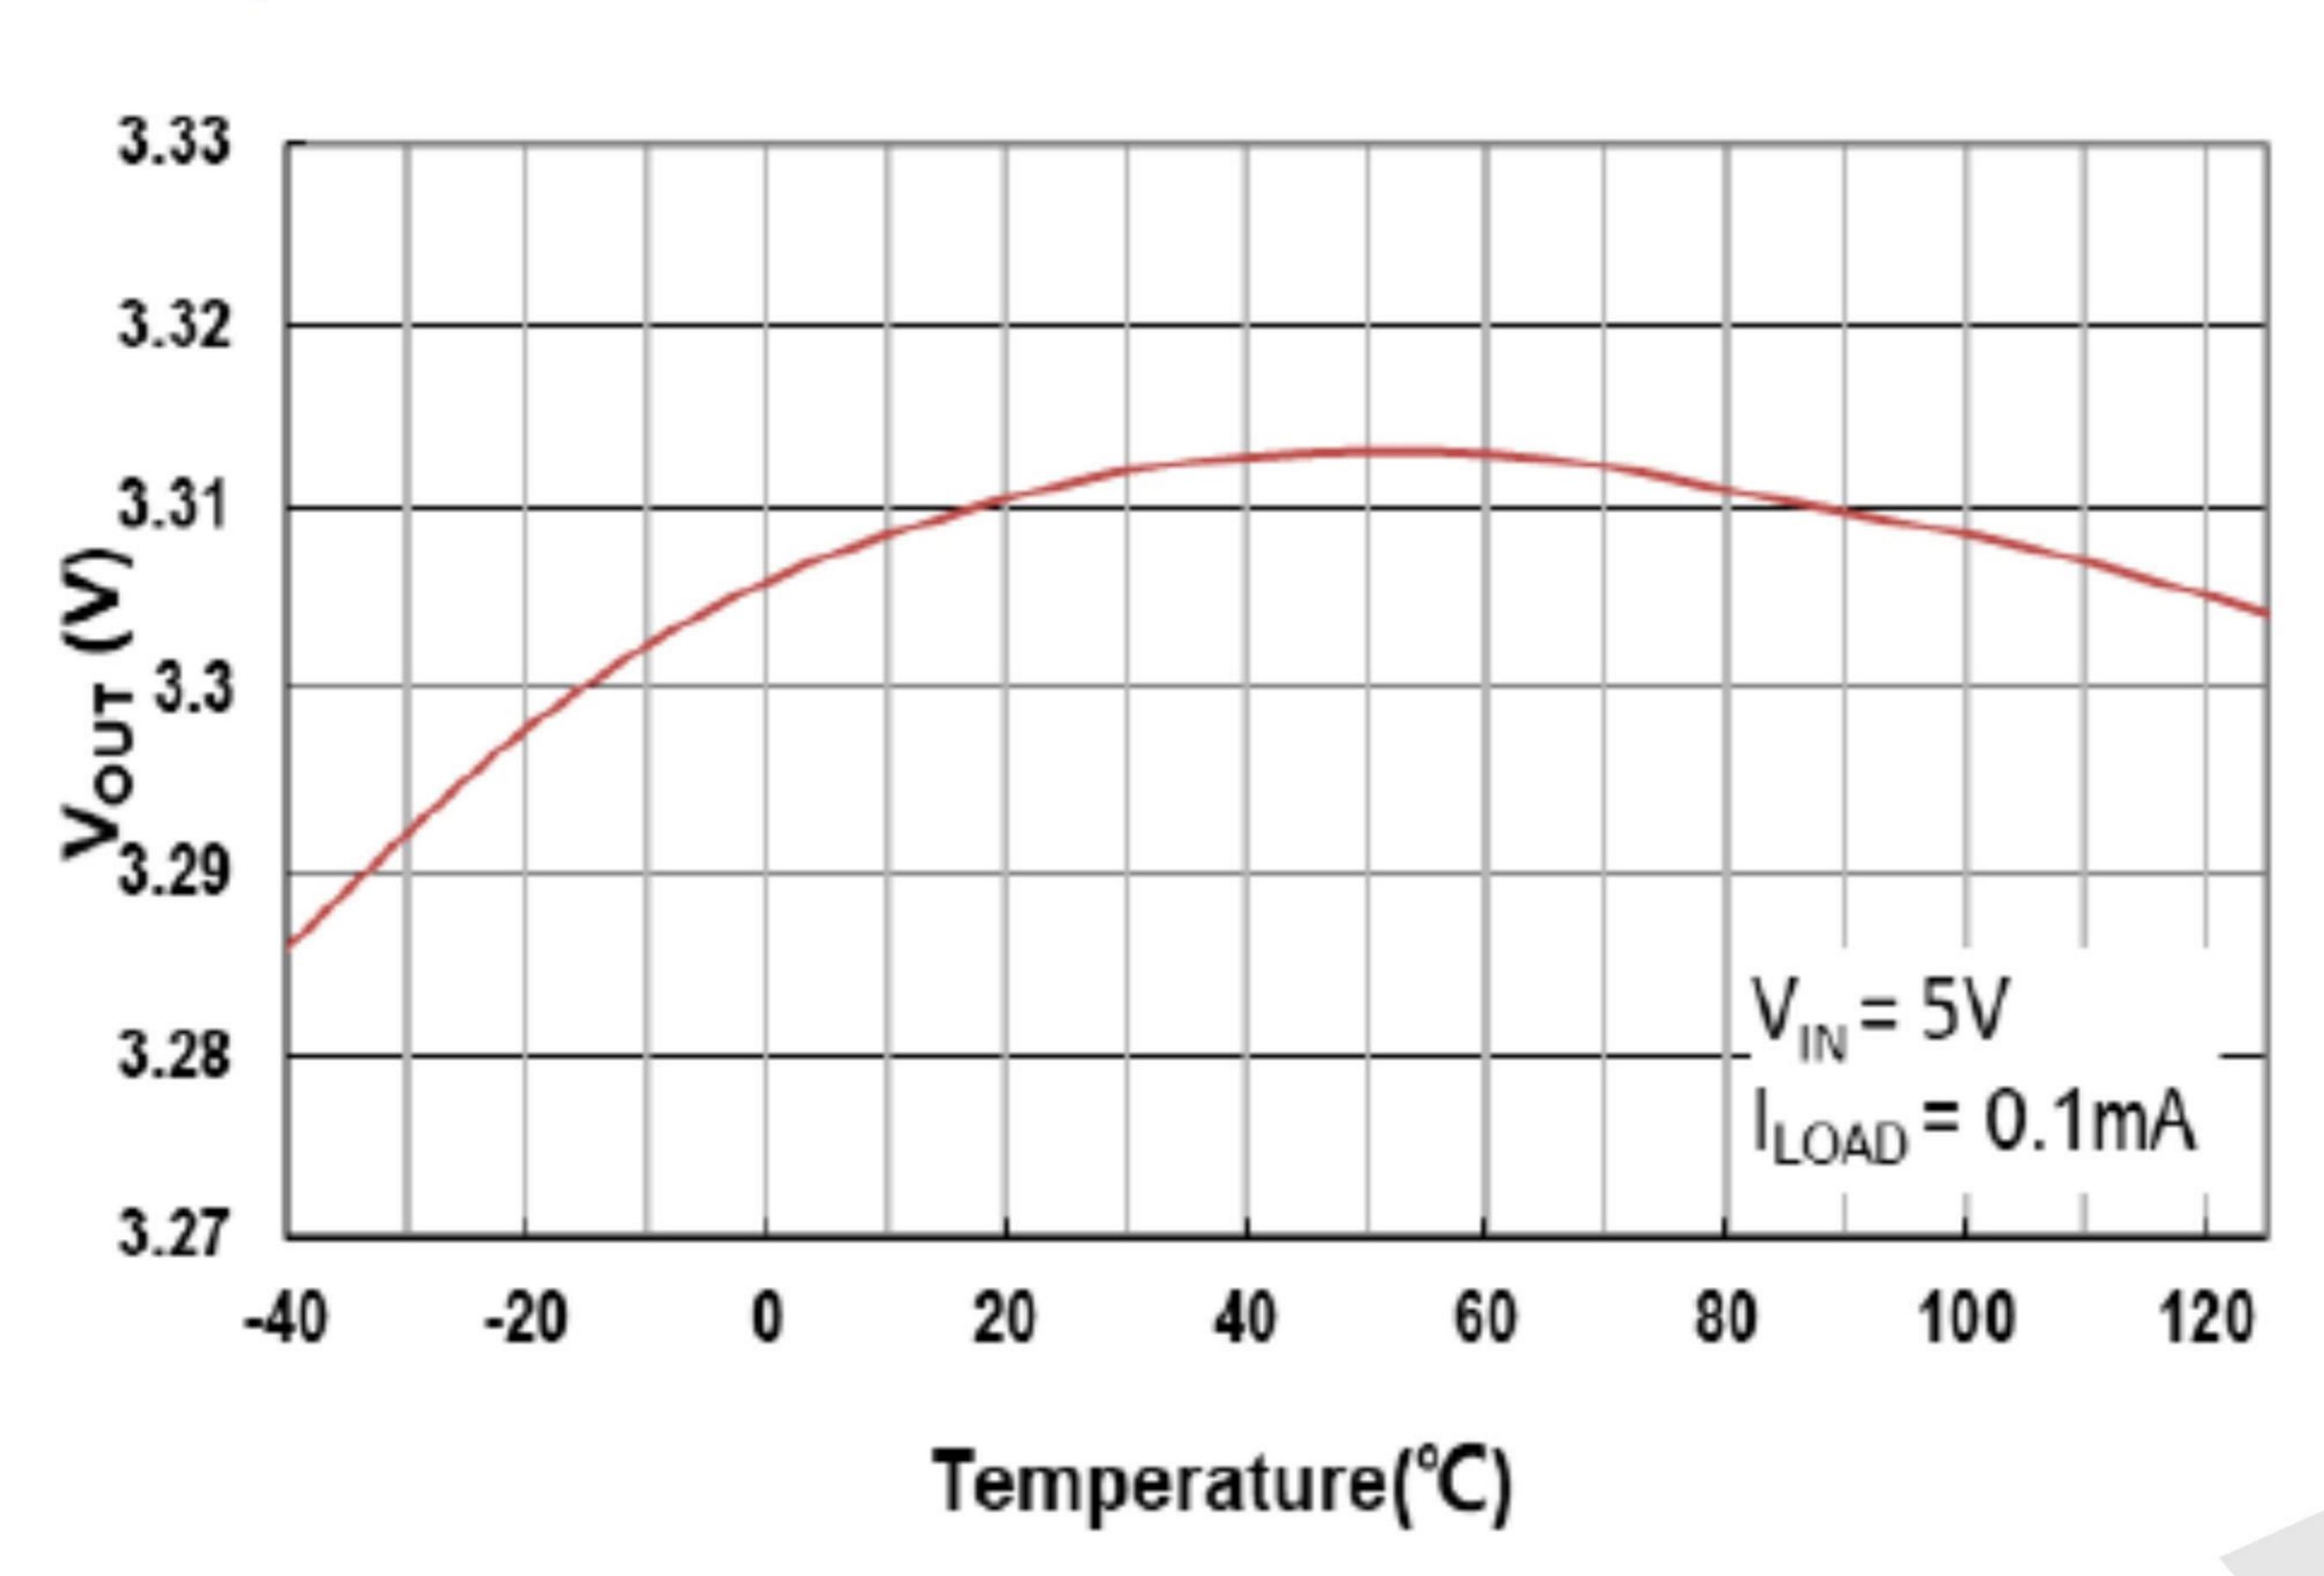


Fig. 5 Output Voltage vs. Temperature

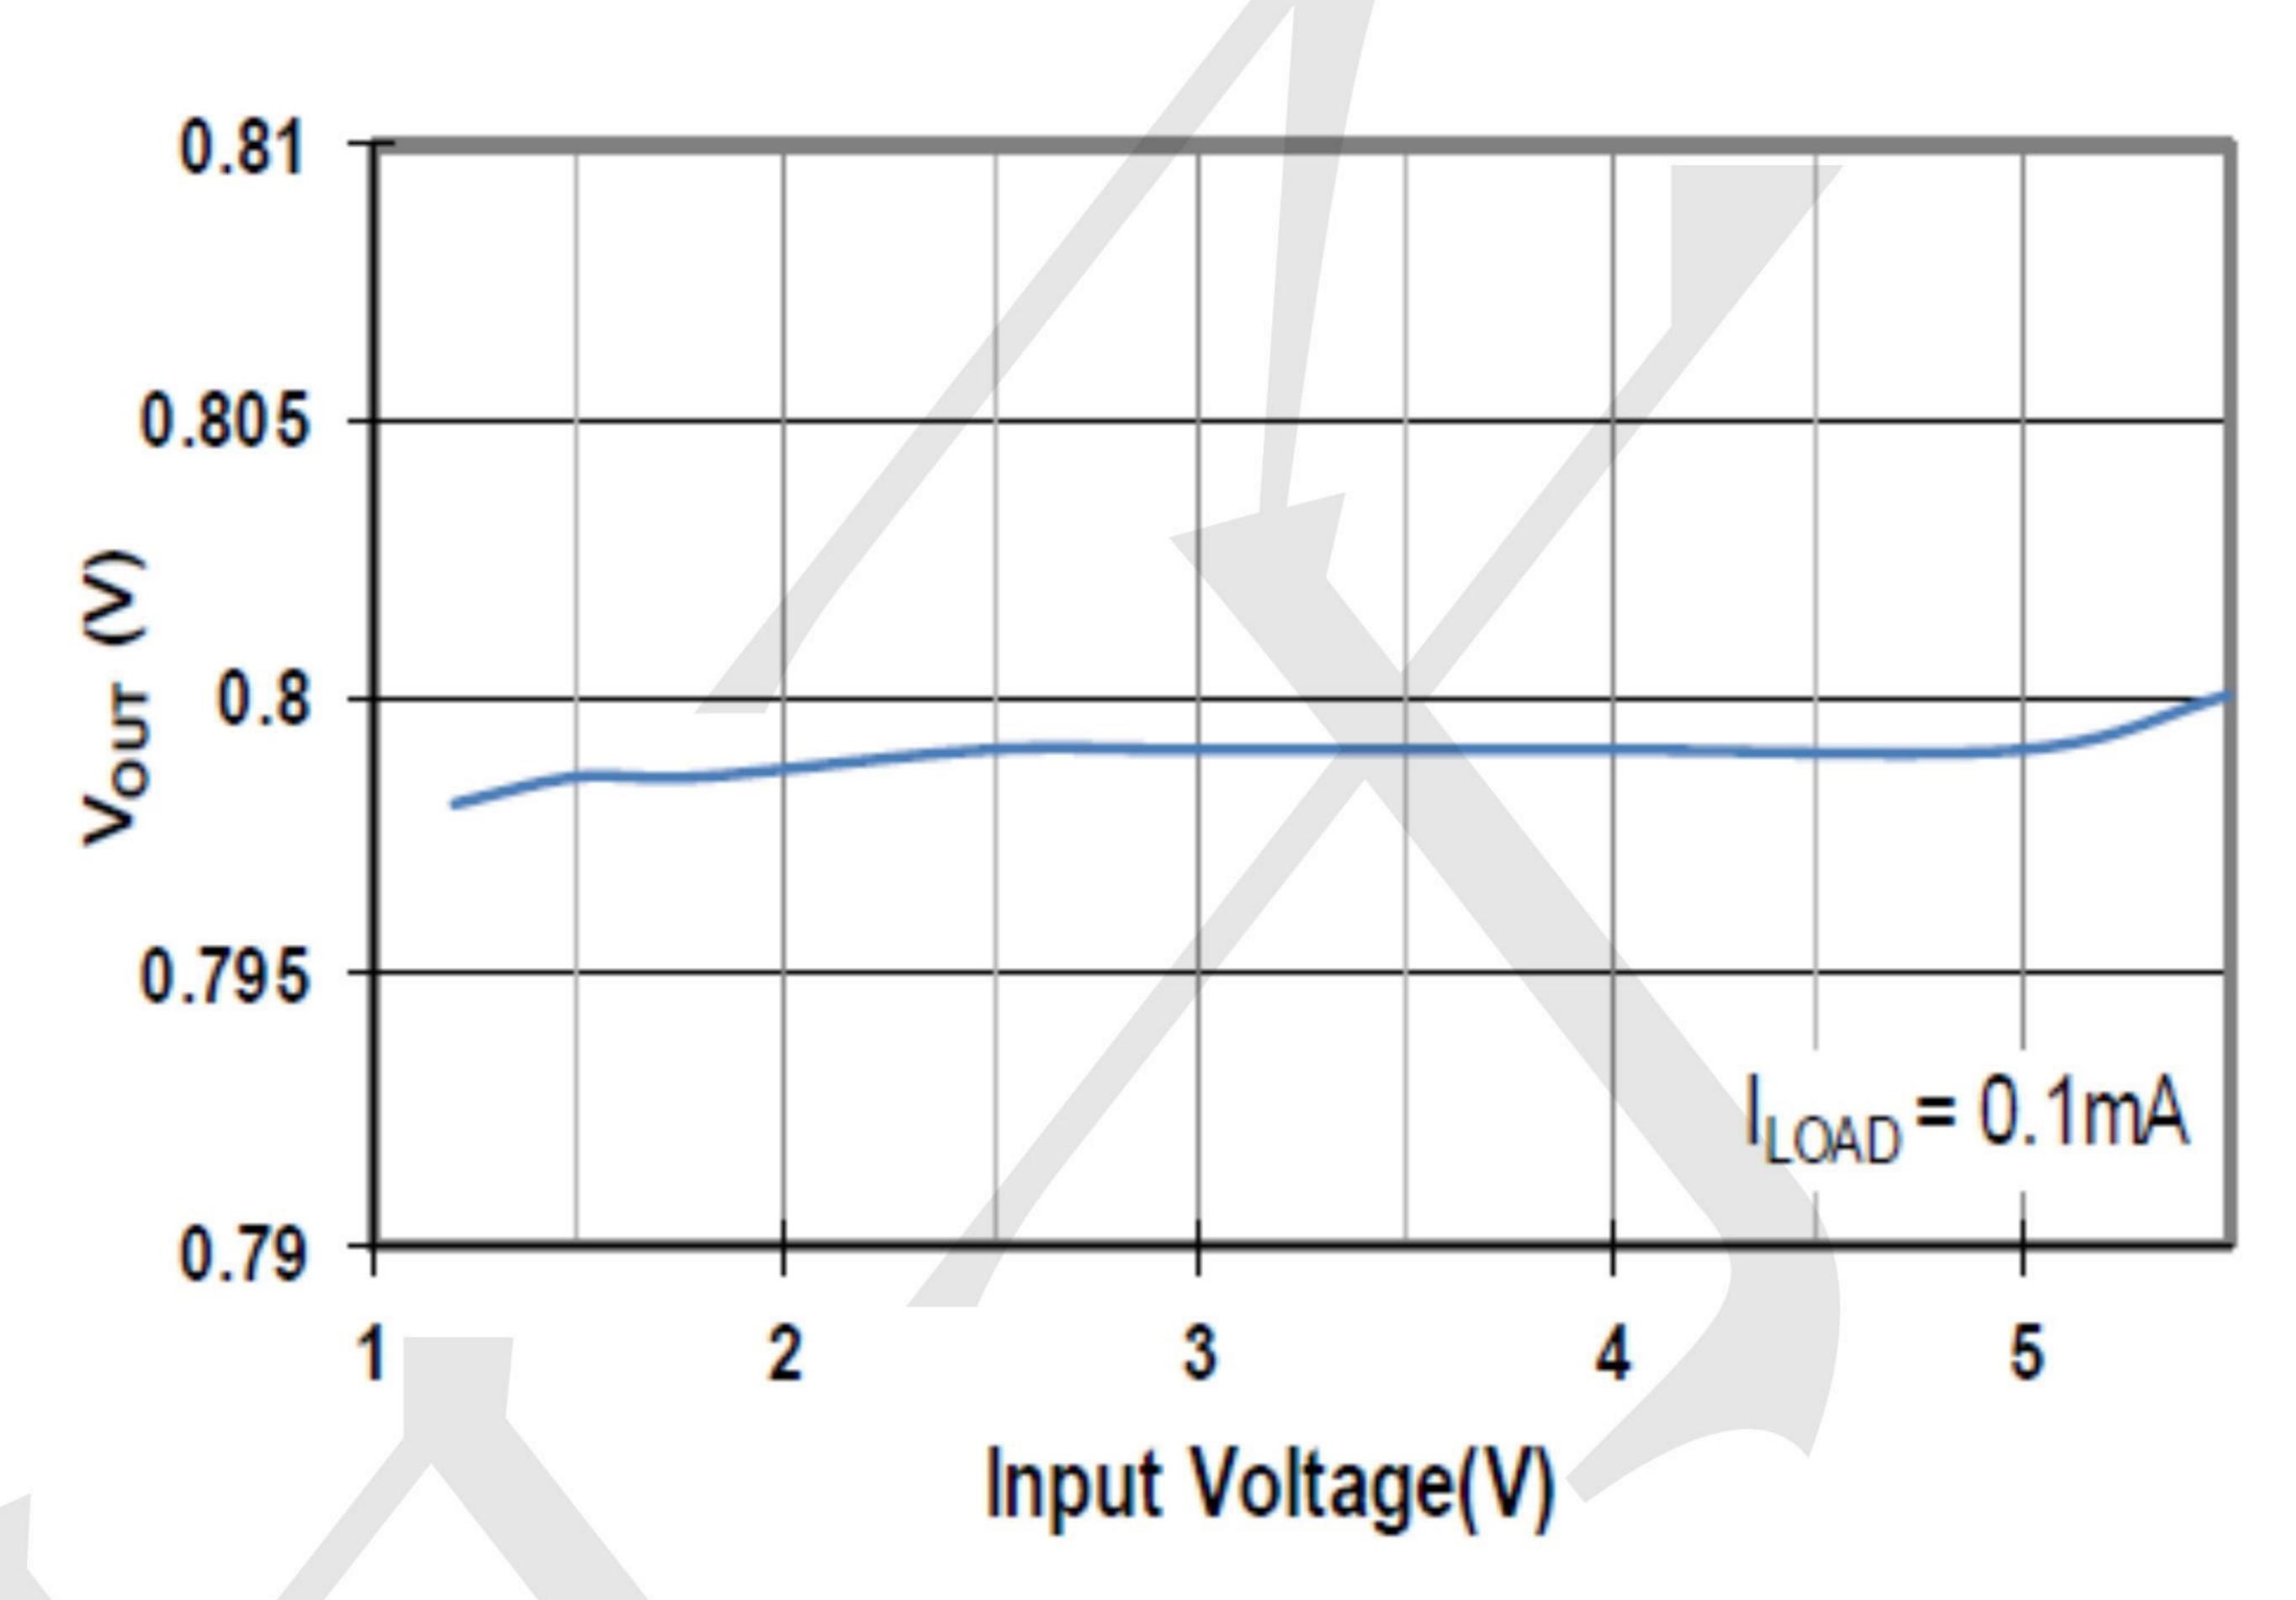


Fig. 6 Output Voltage vs. Input Voltage

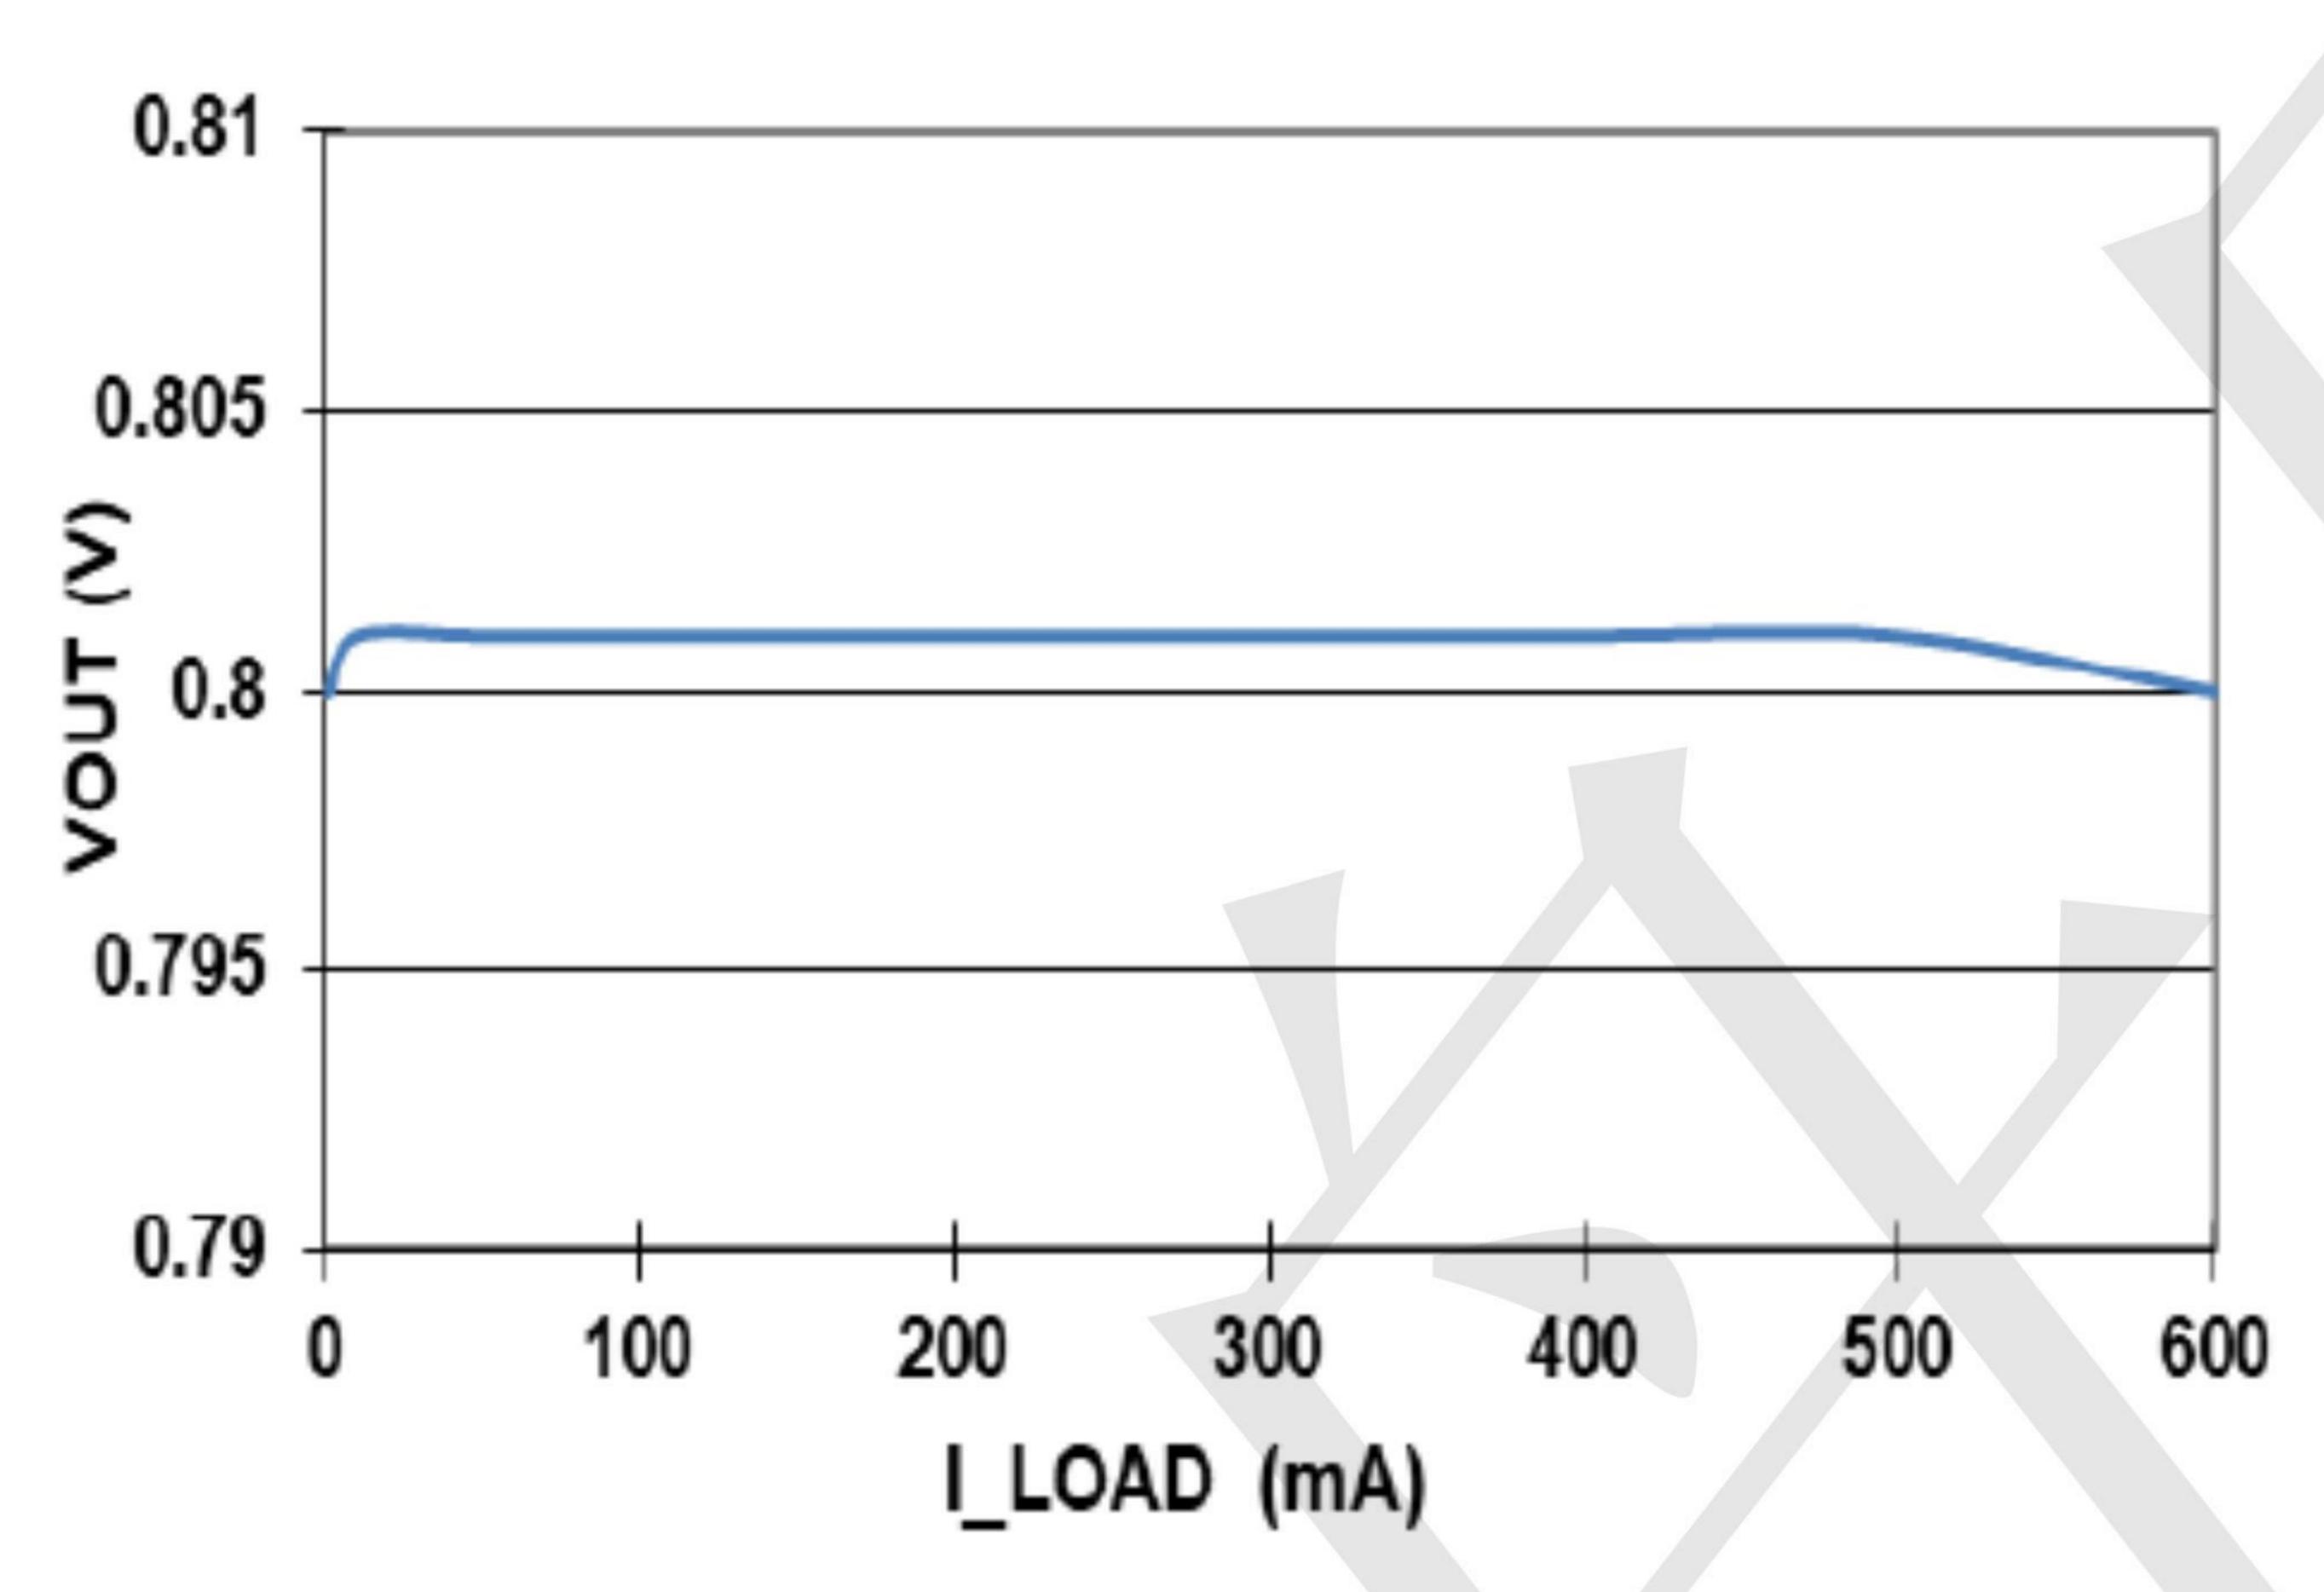


Fig. 7 Output Voltage vs. Load Current

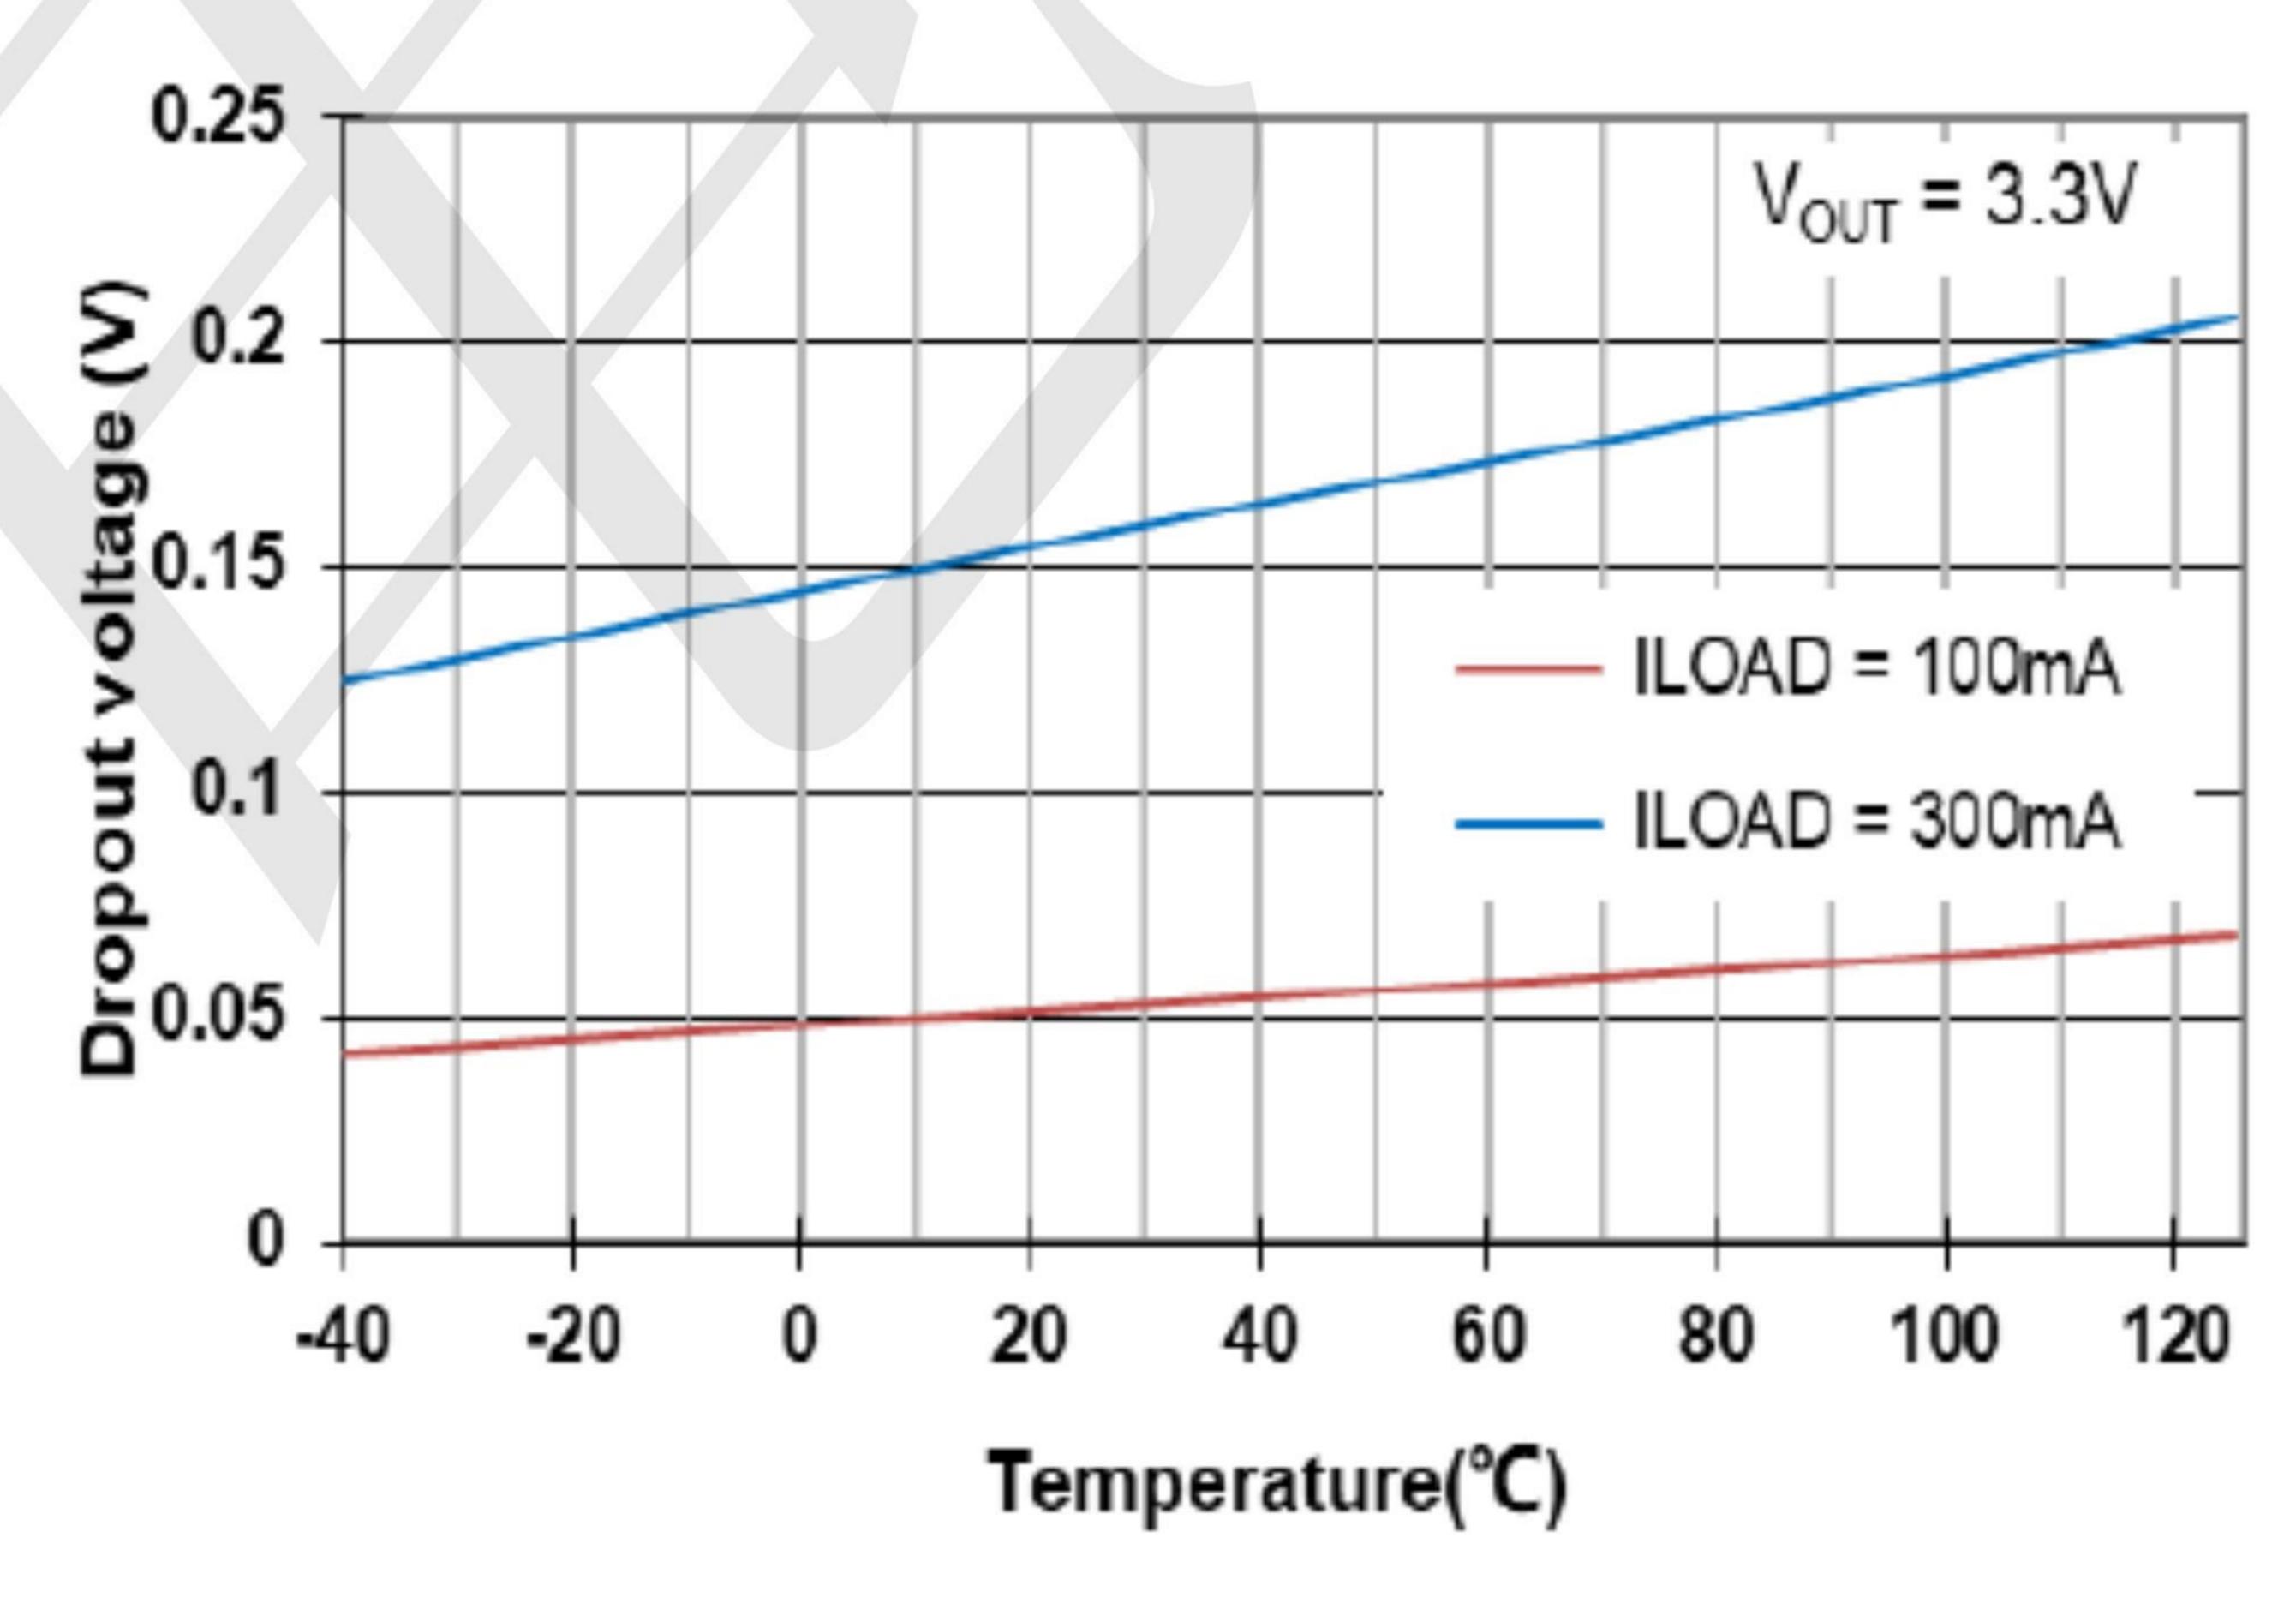


Fig. 8 Dropout Voltage vs. Temperature

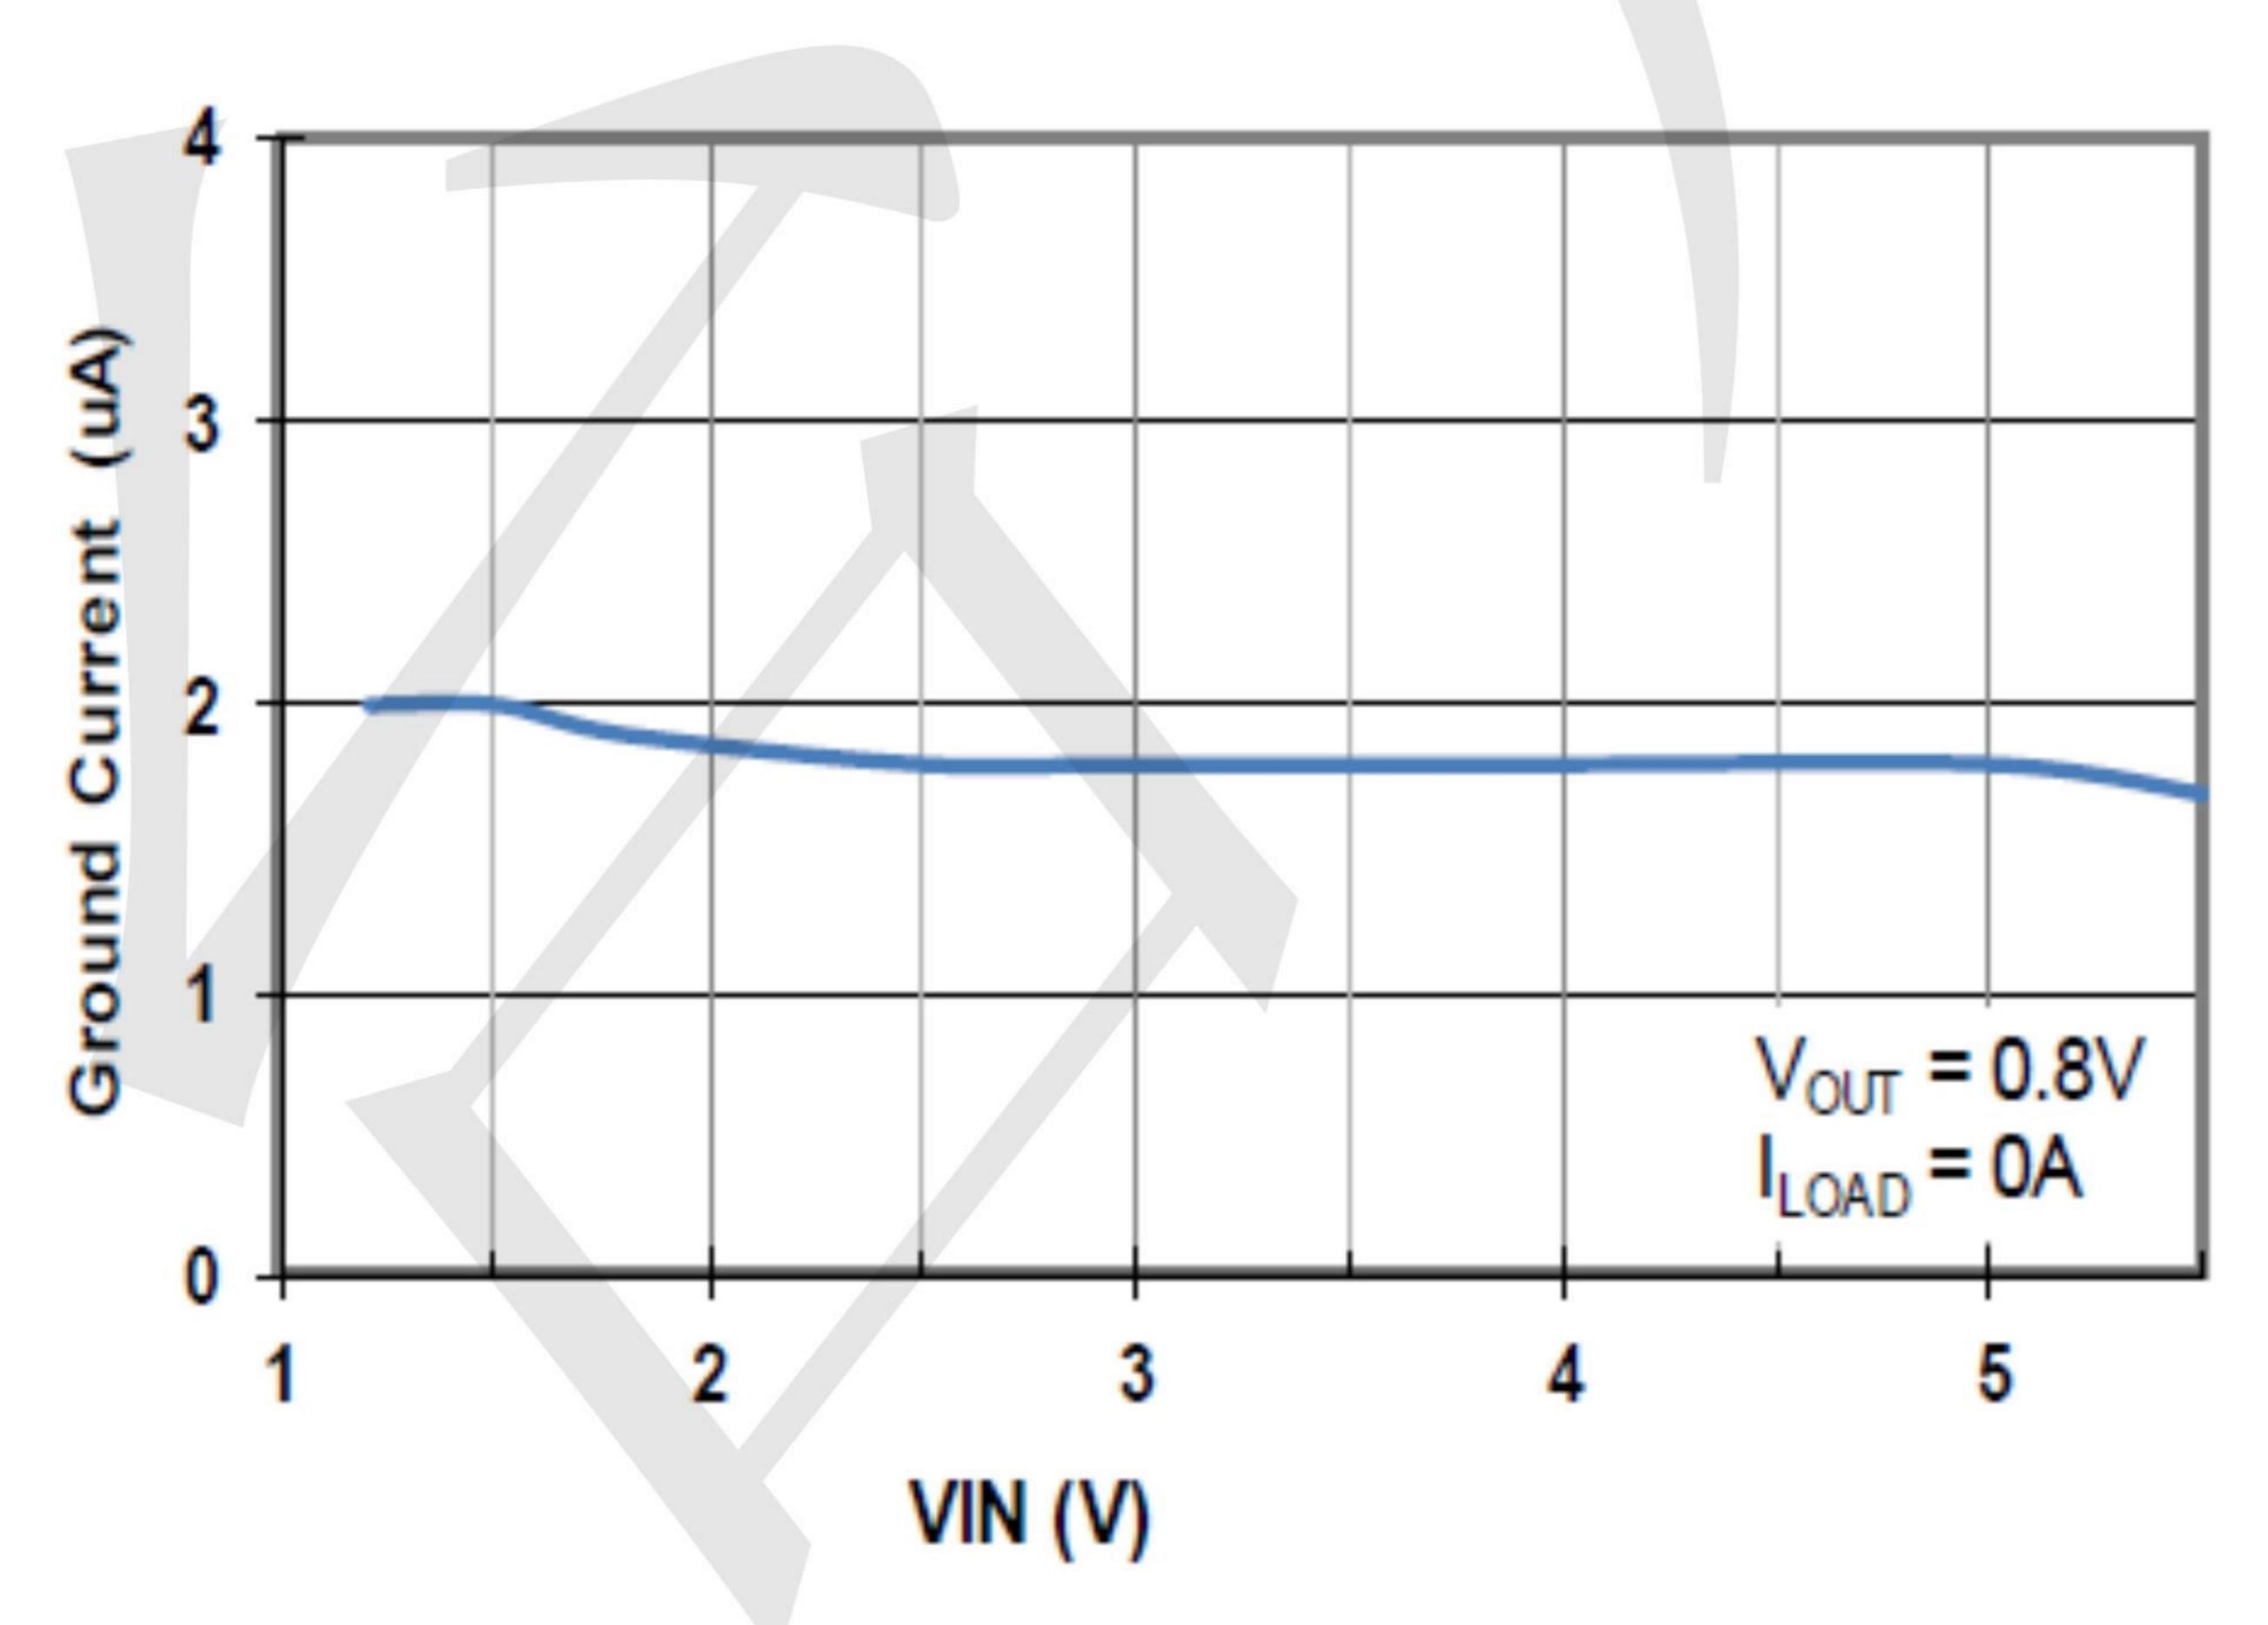


Fig. 9 Ground Current vs. Input Voltage


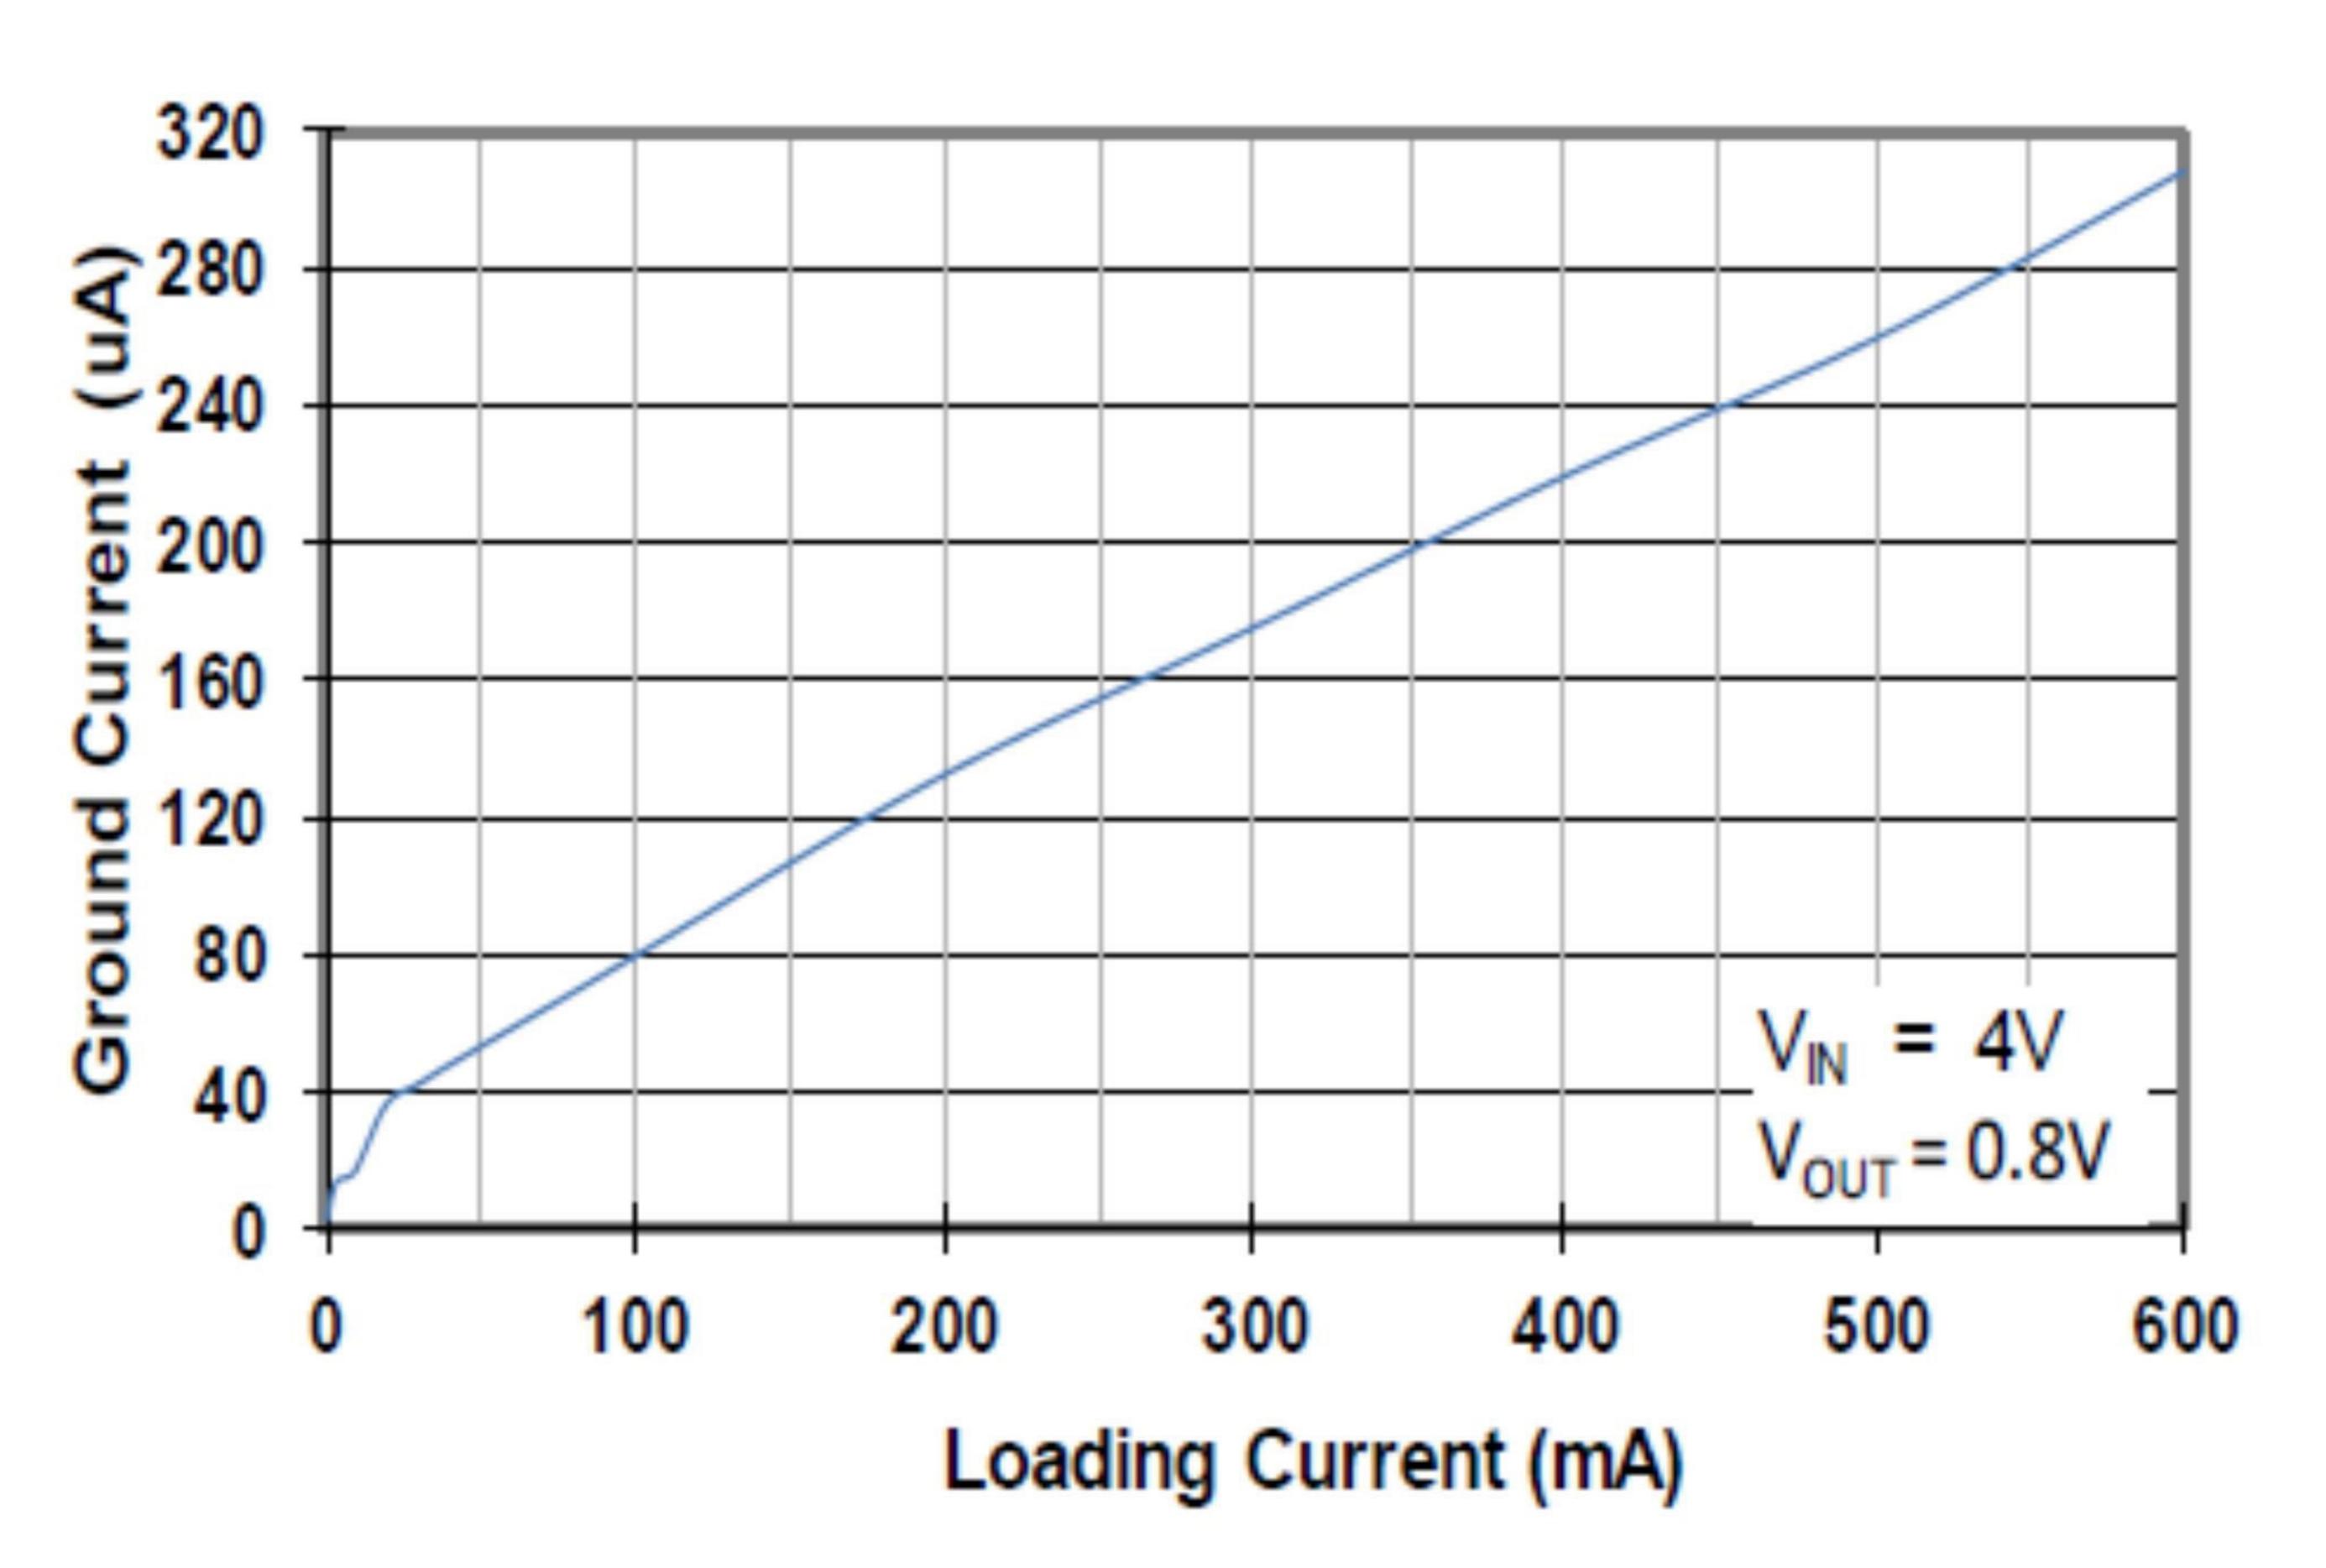



Fig. 10 Ground Current vs. Loading Current



#### 600mA,2uA, Higt PSRR Voltage Reaulators

#### www.sot23.com.tw

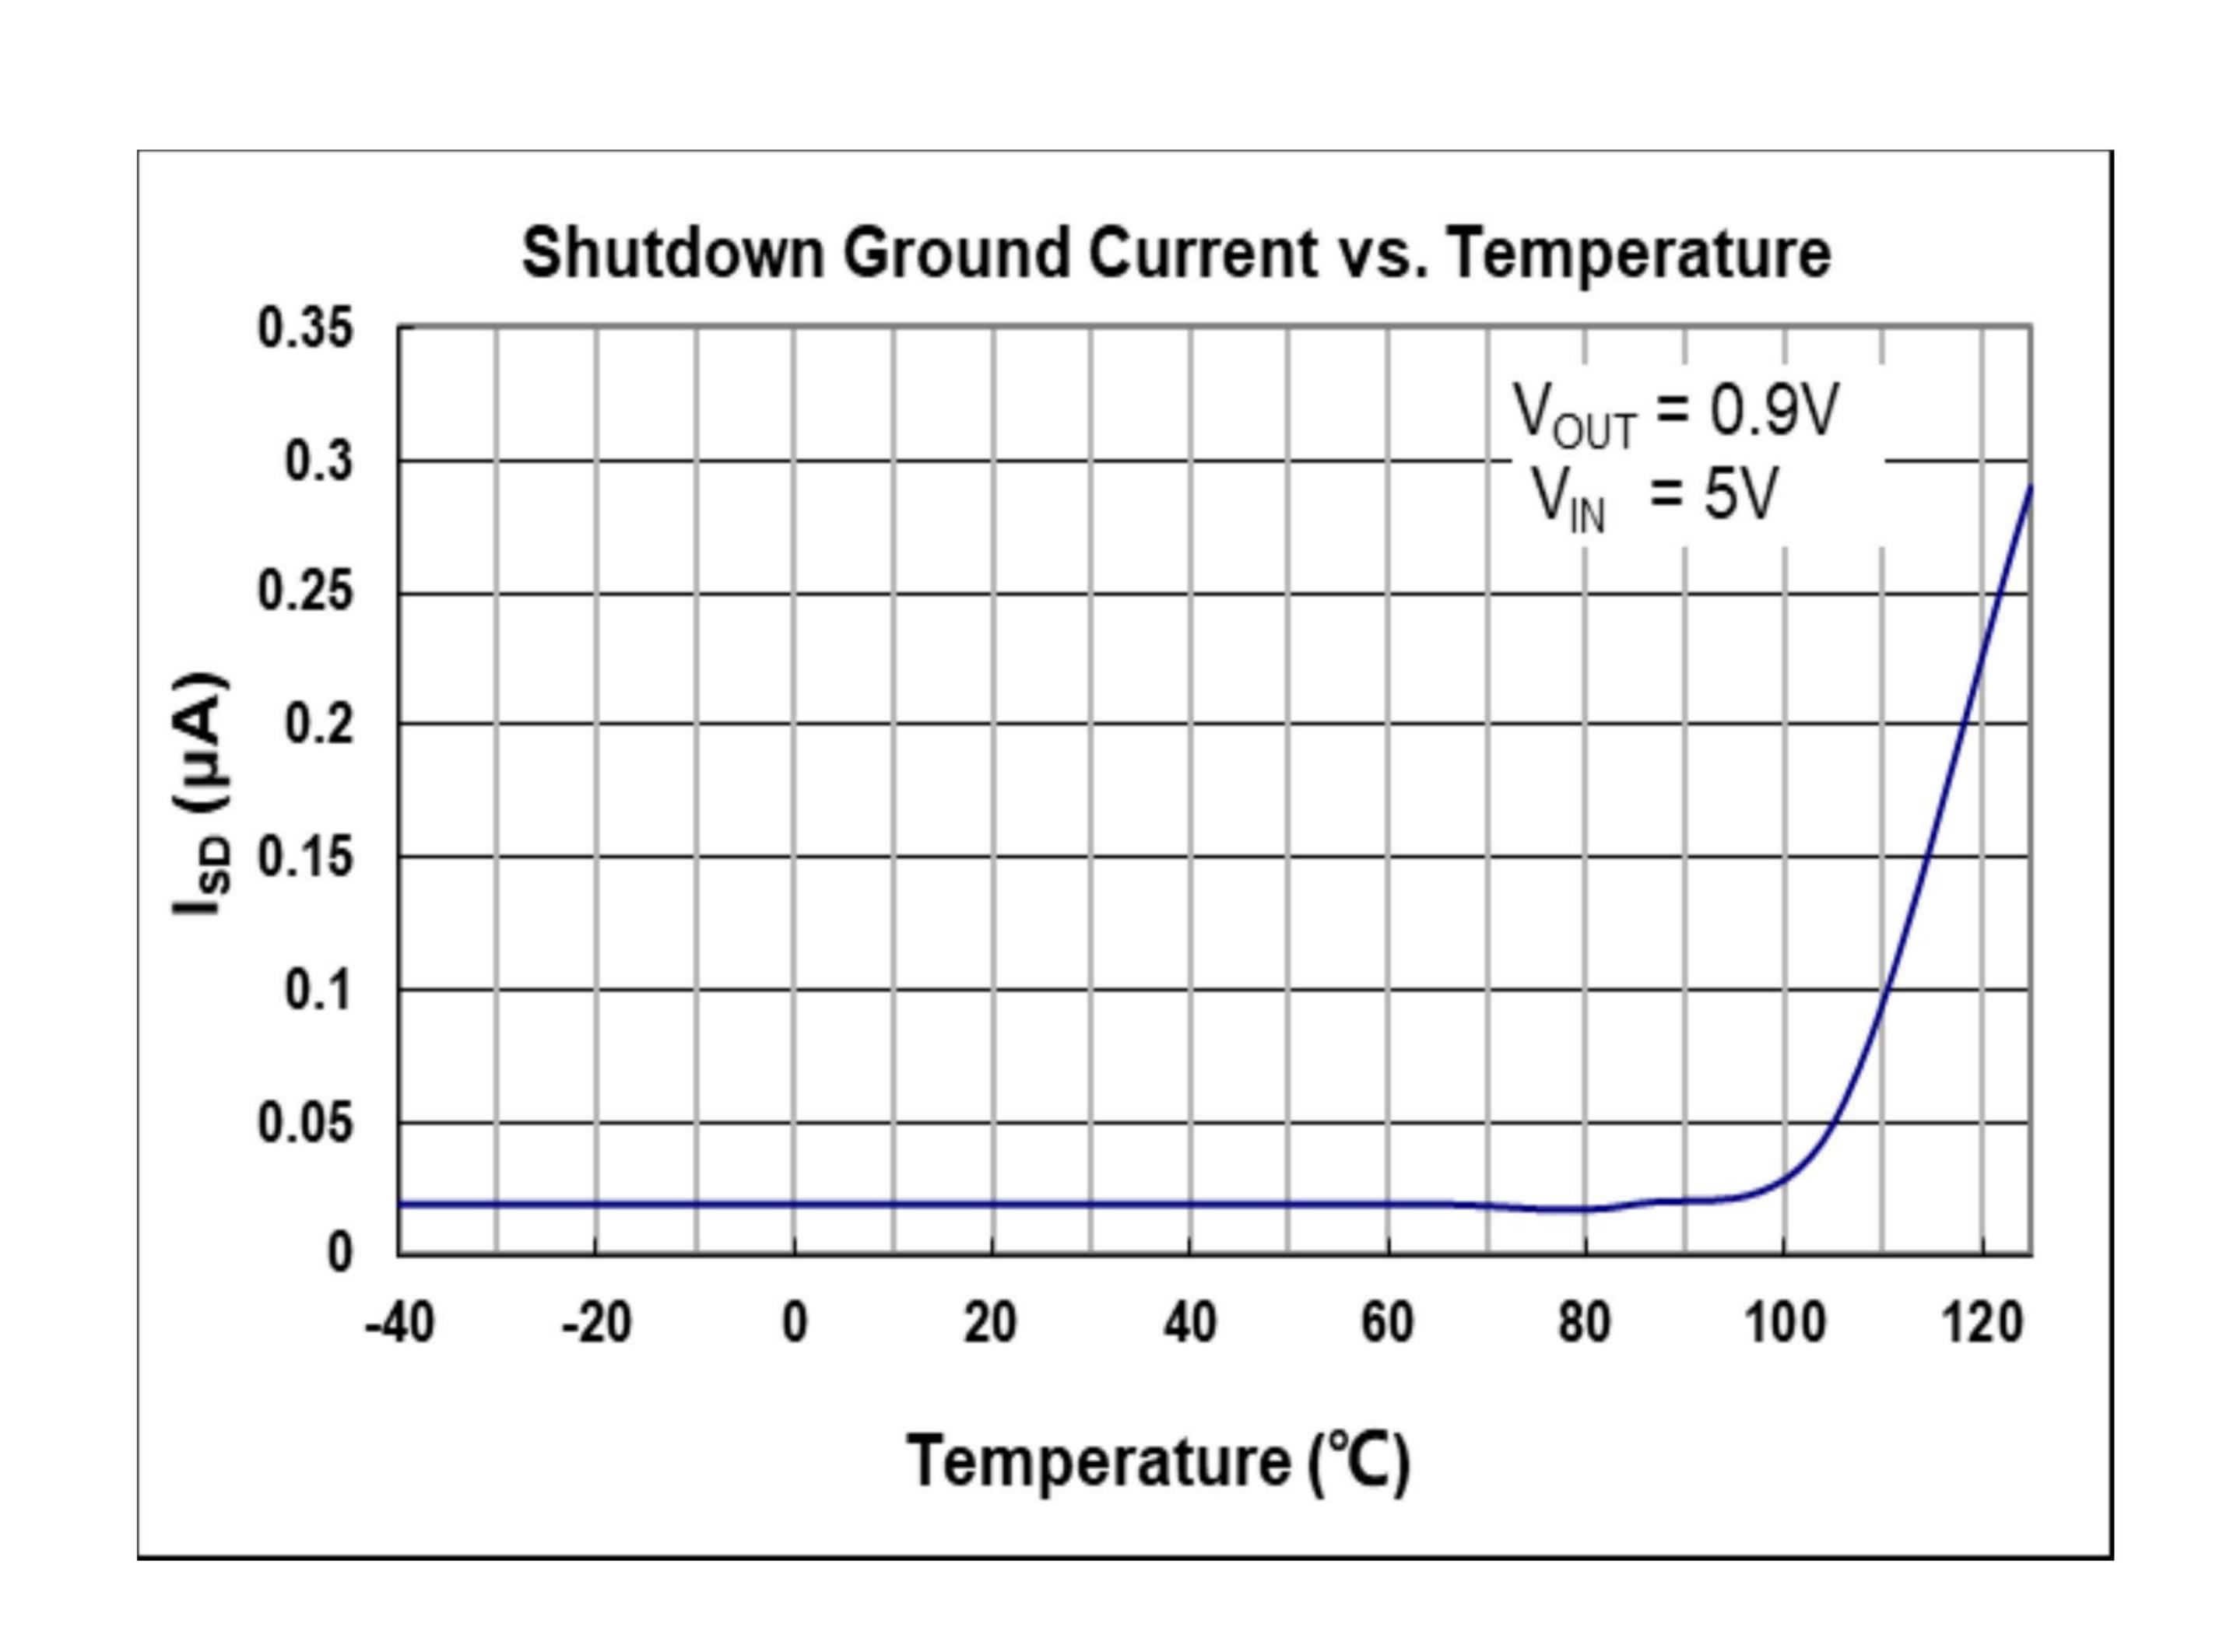


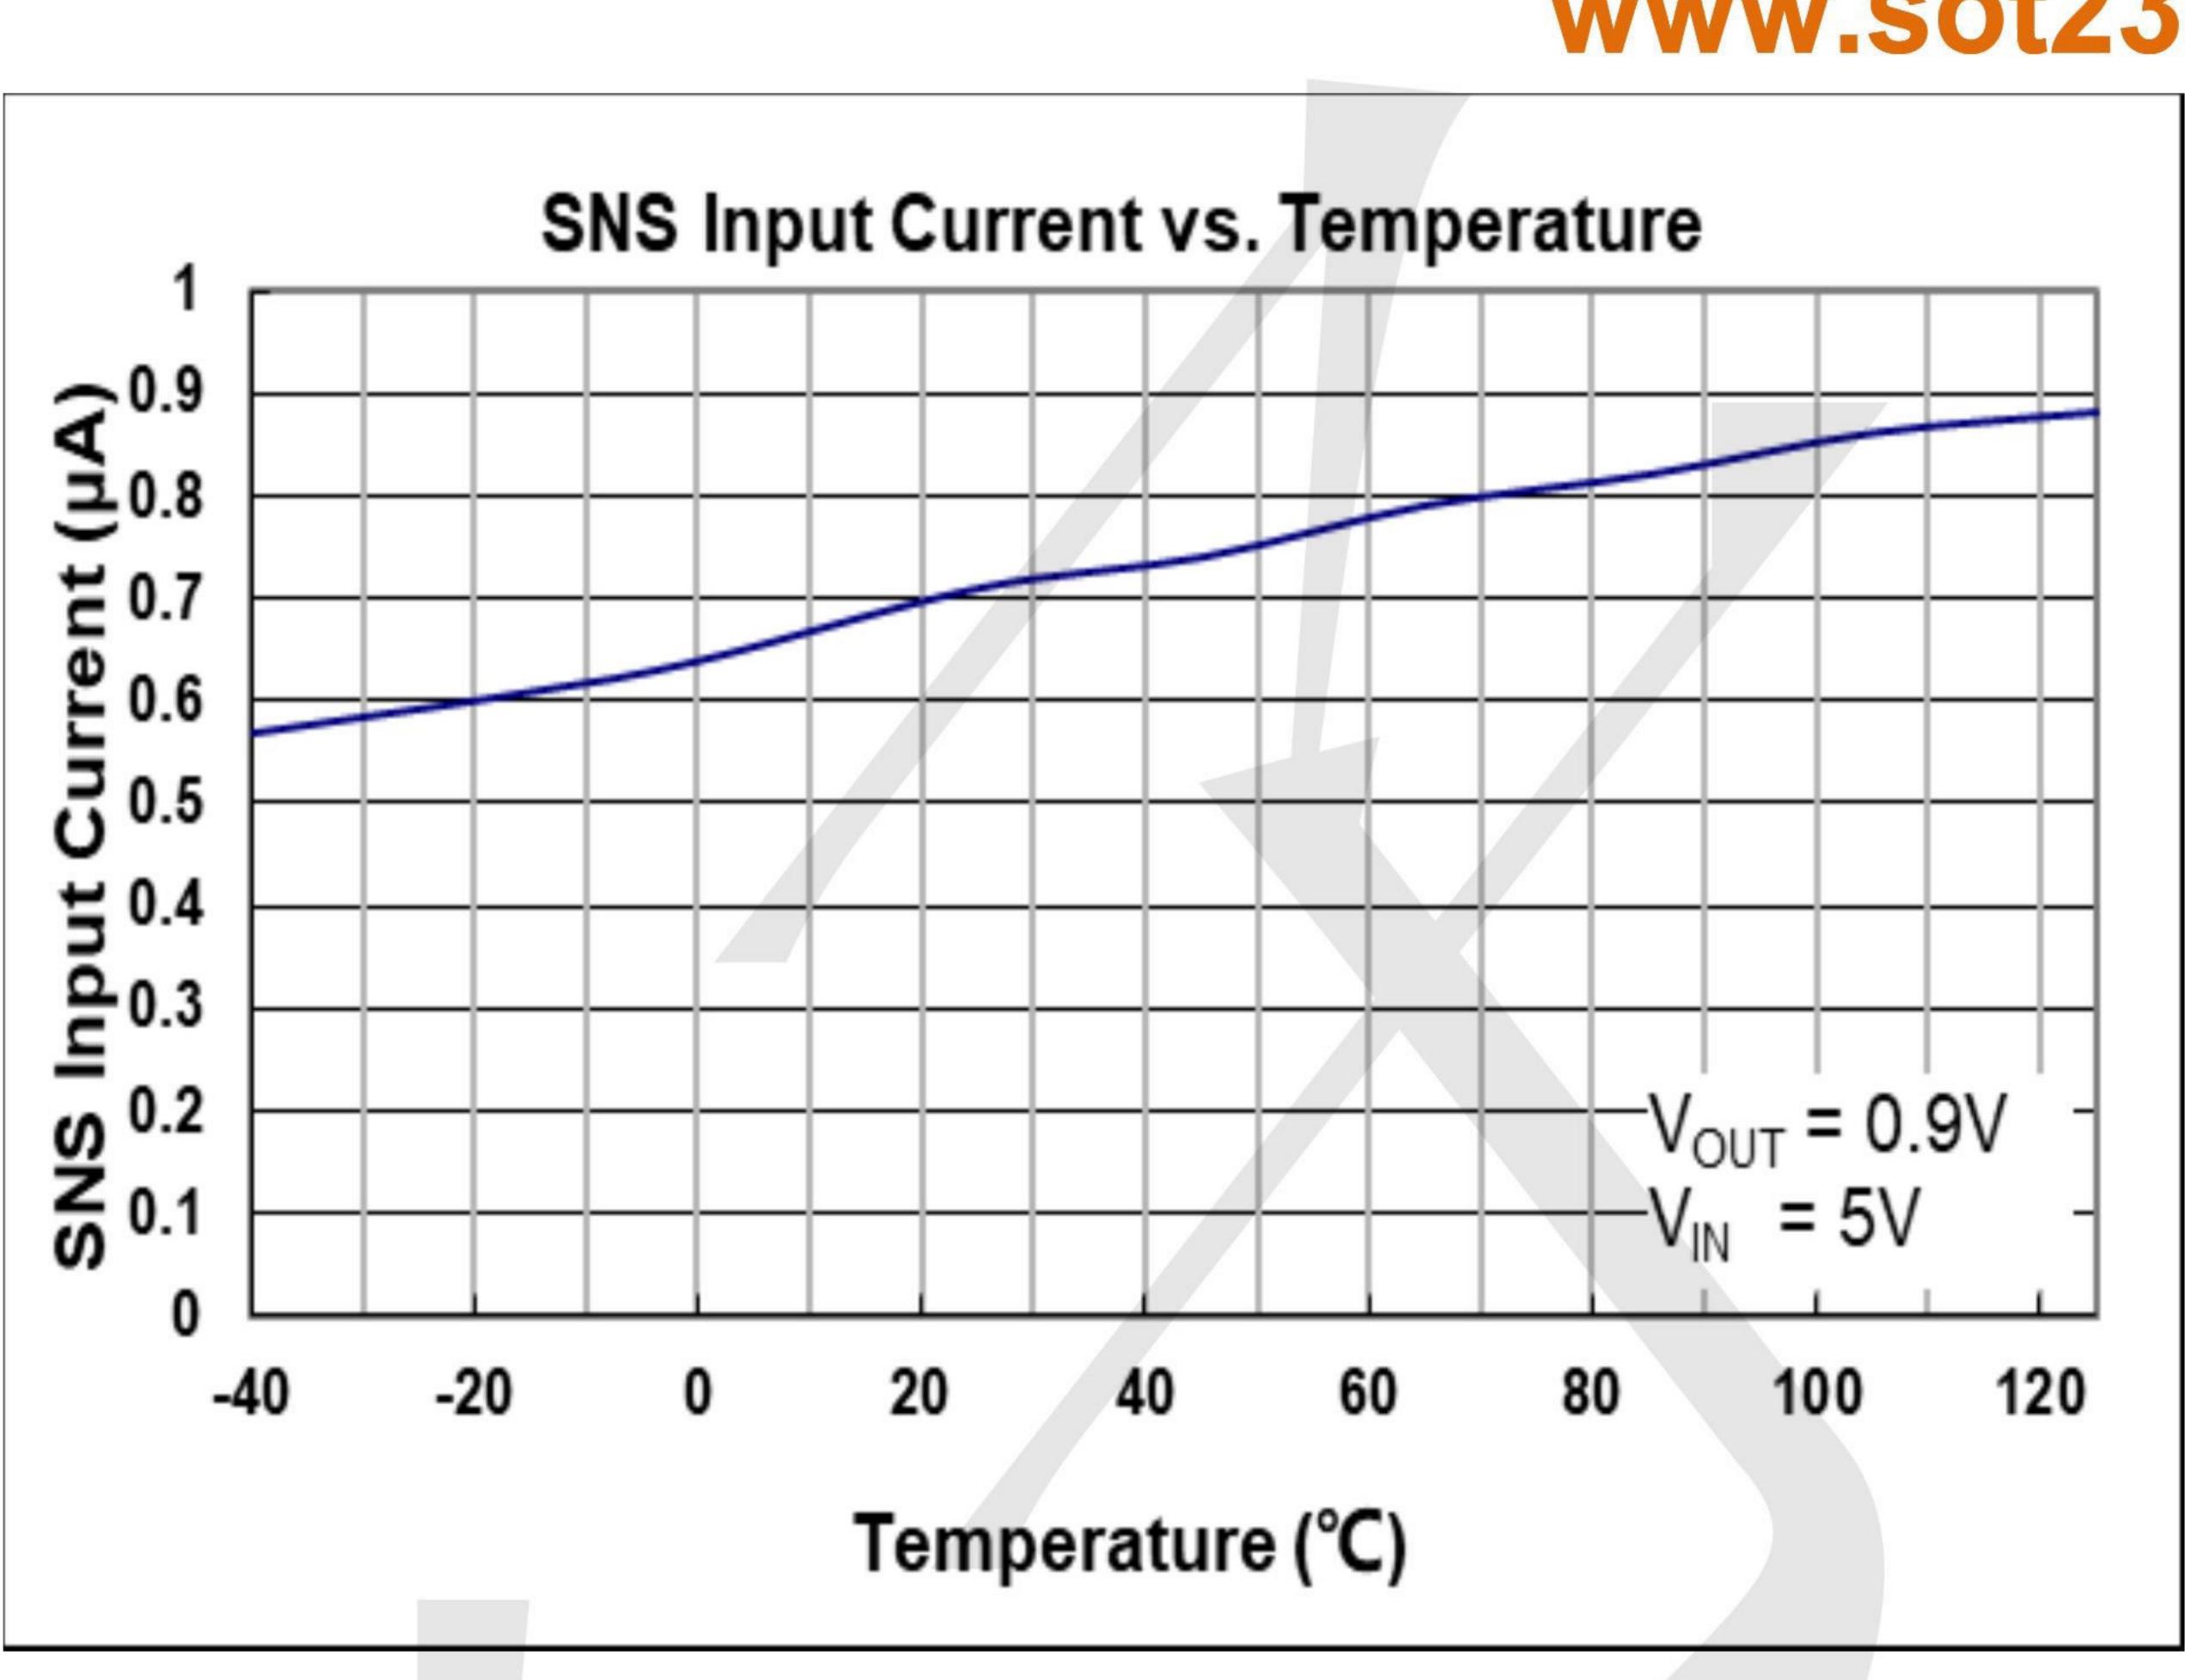

# Current Limit vs. Input voltage


1200 W 1100 1000 900 Vout Short to GND



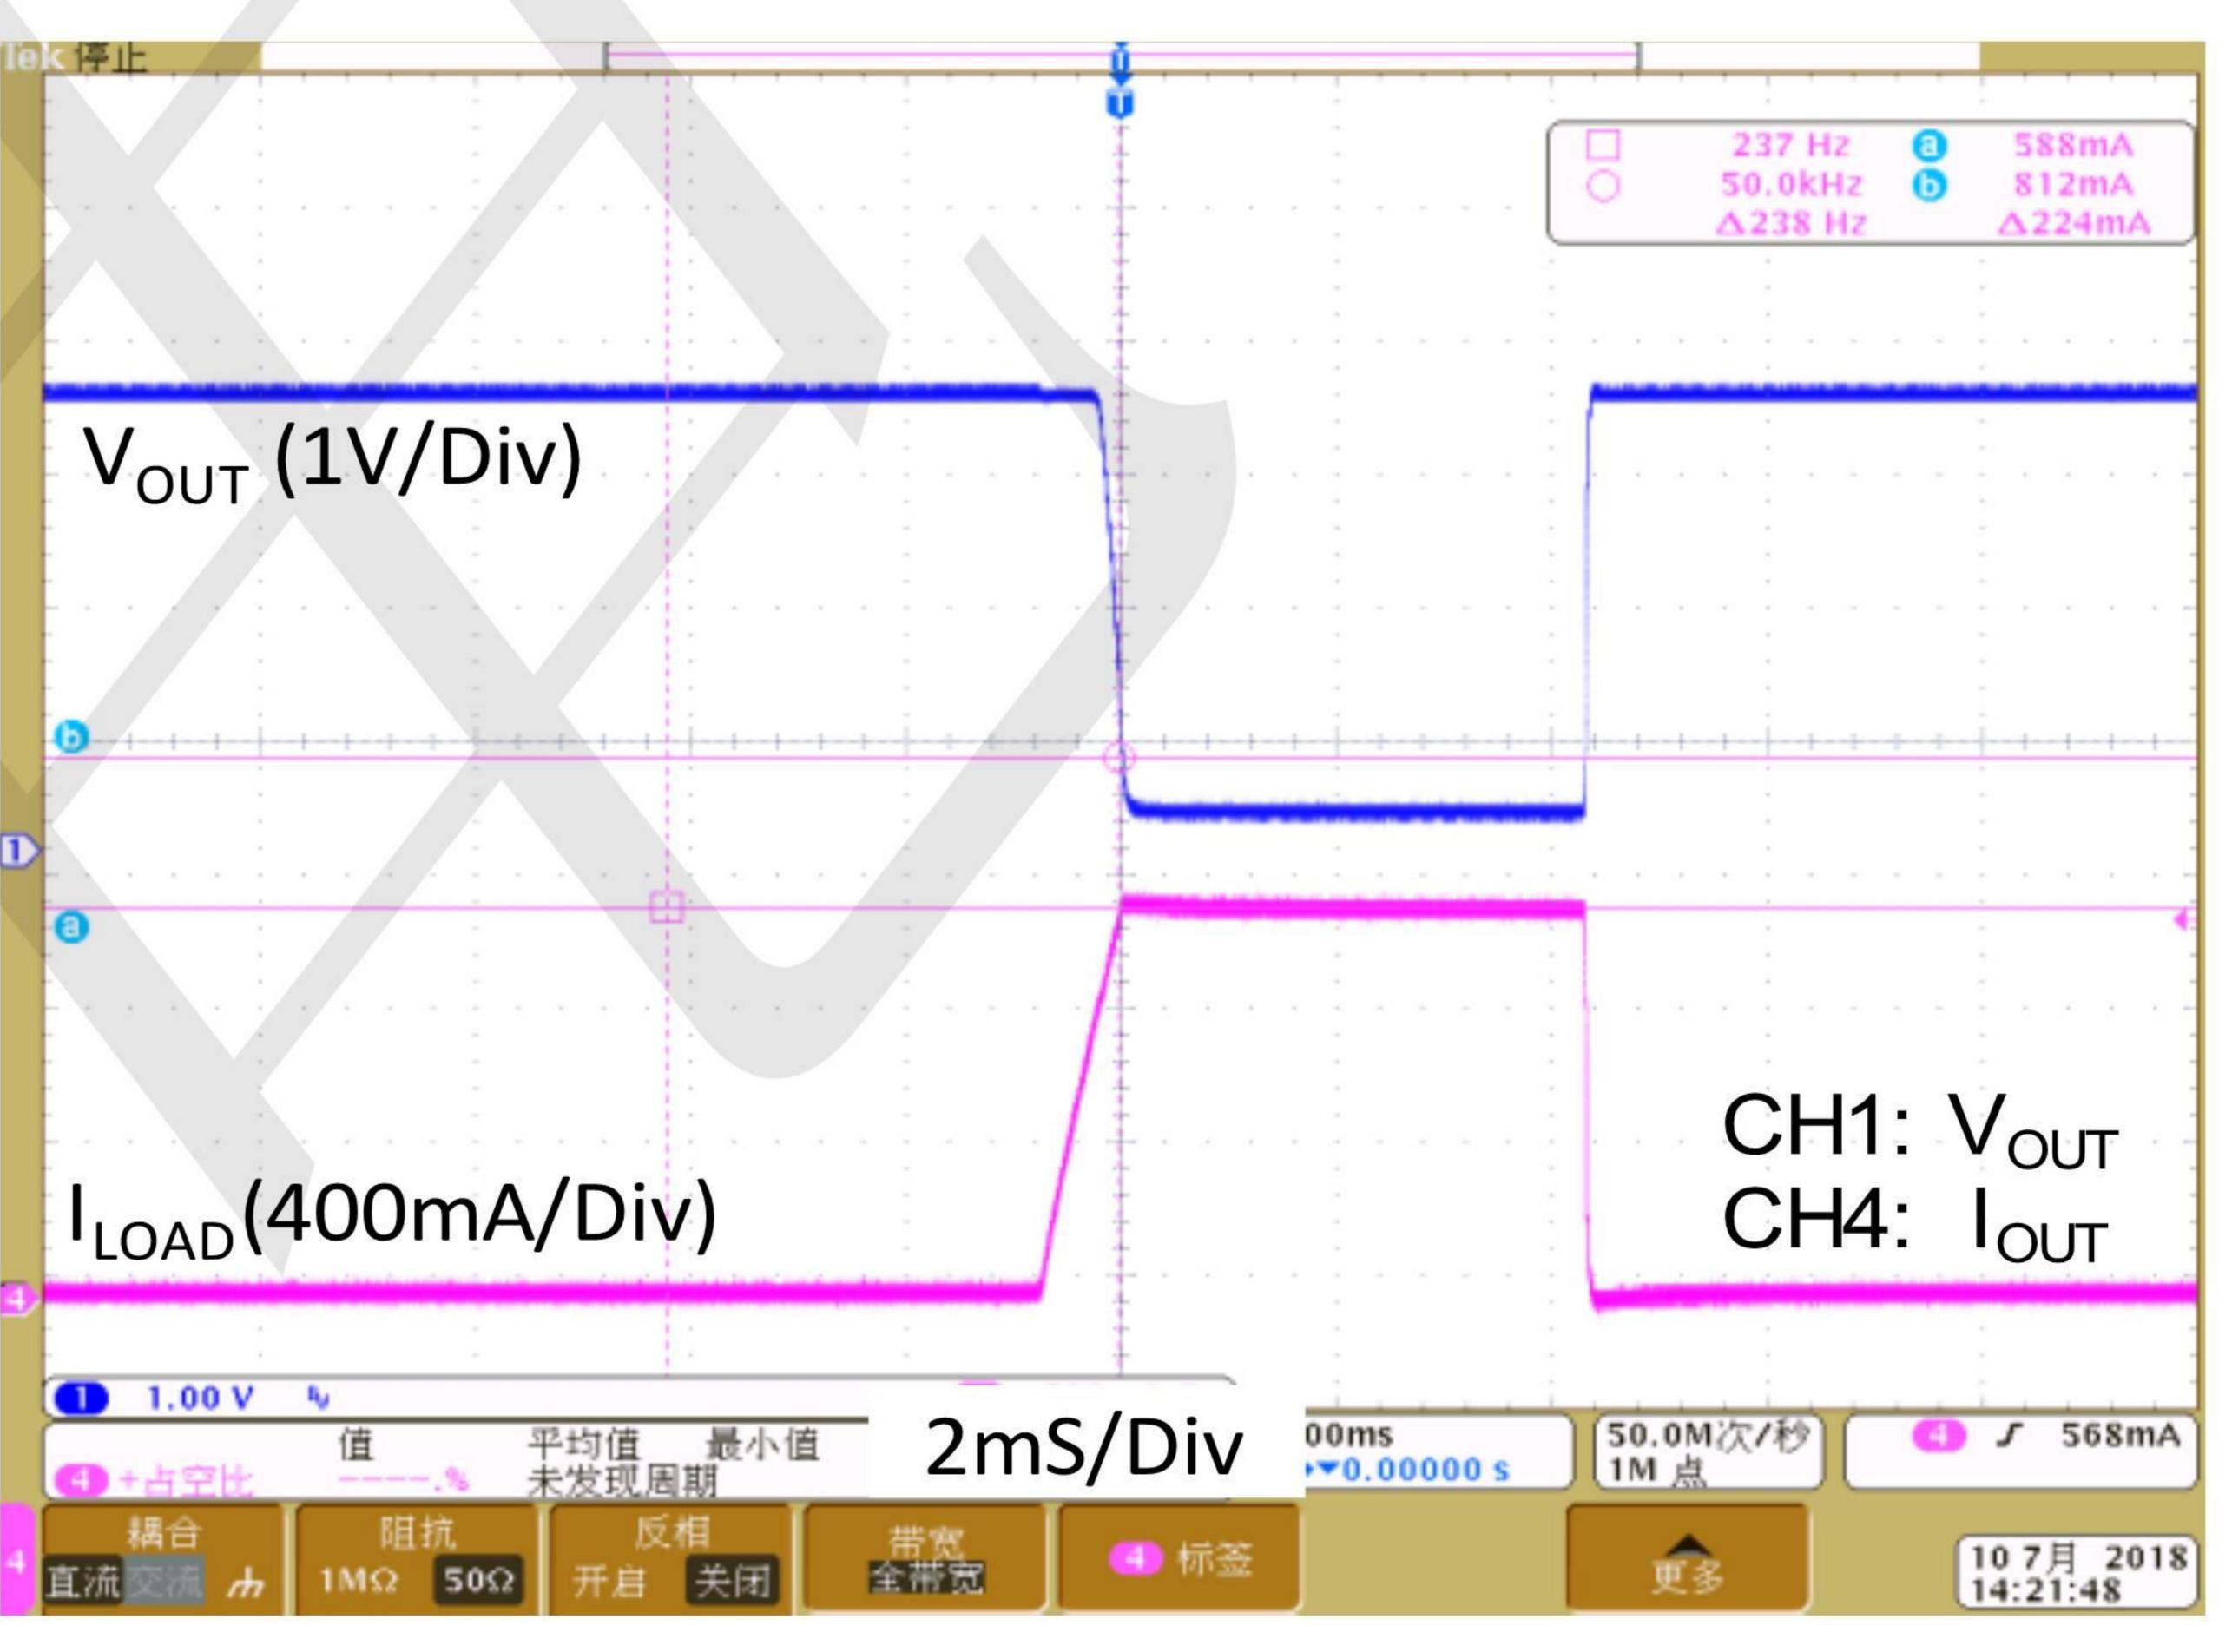


#### Load Transient Response I

Input Voltage (V)

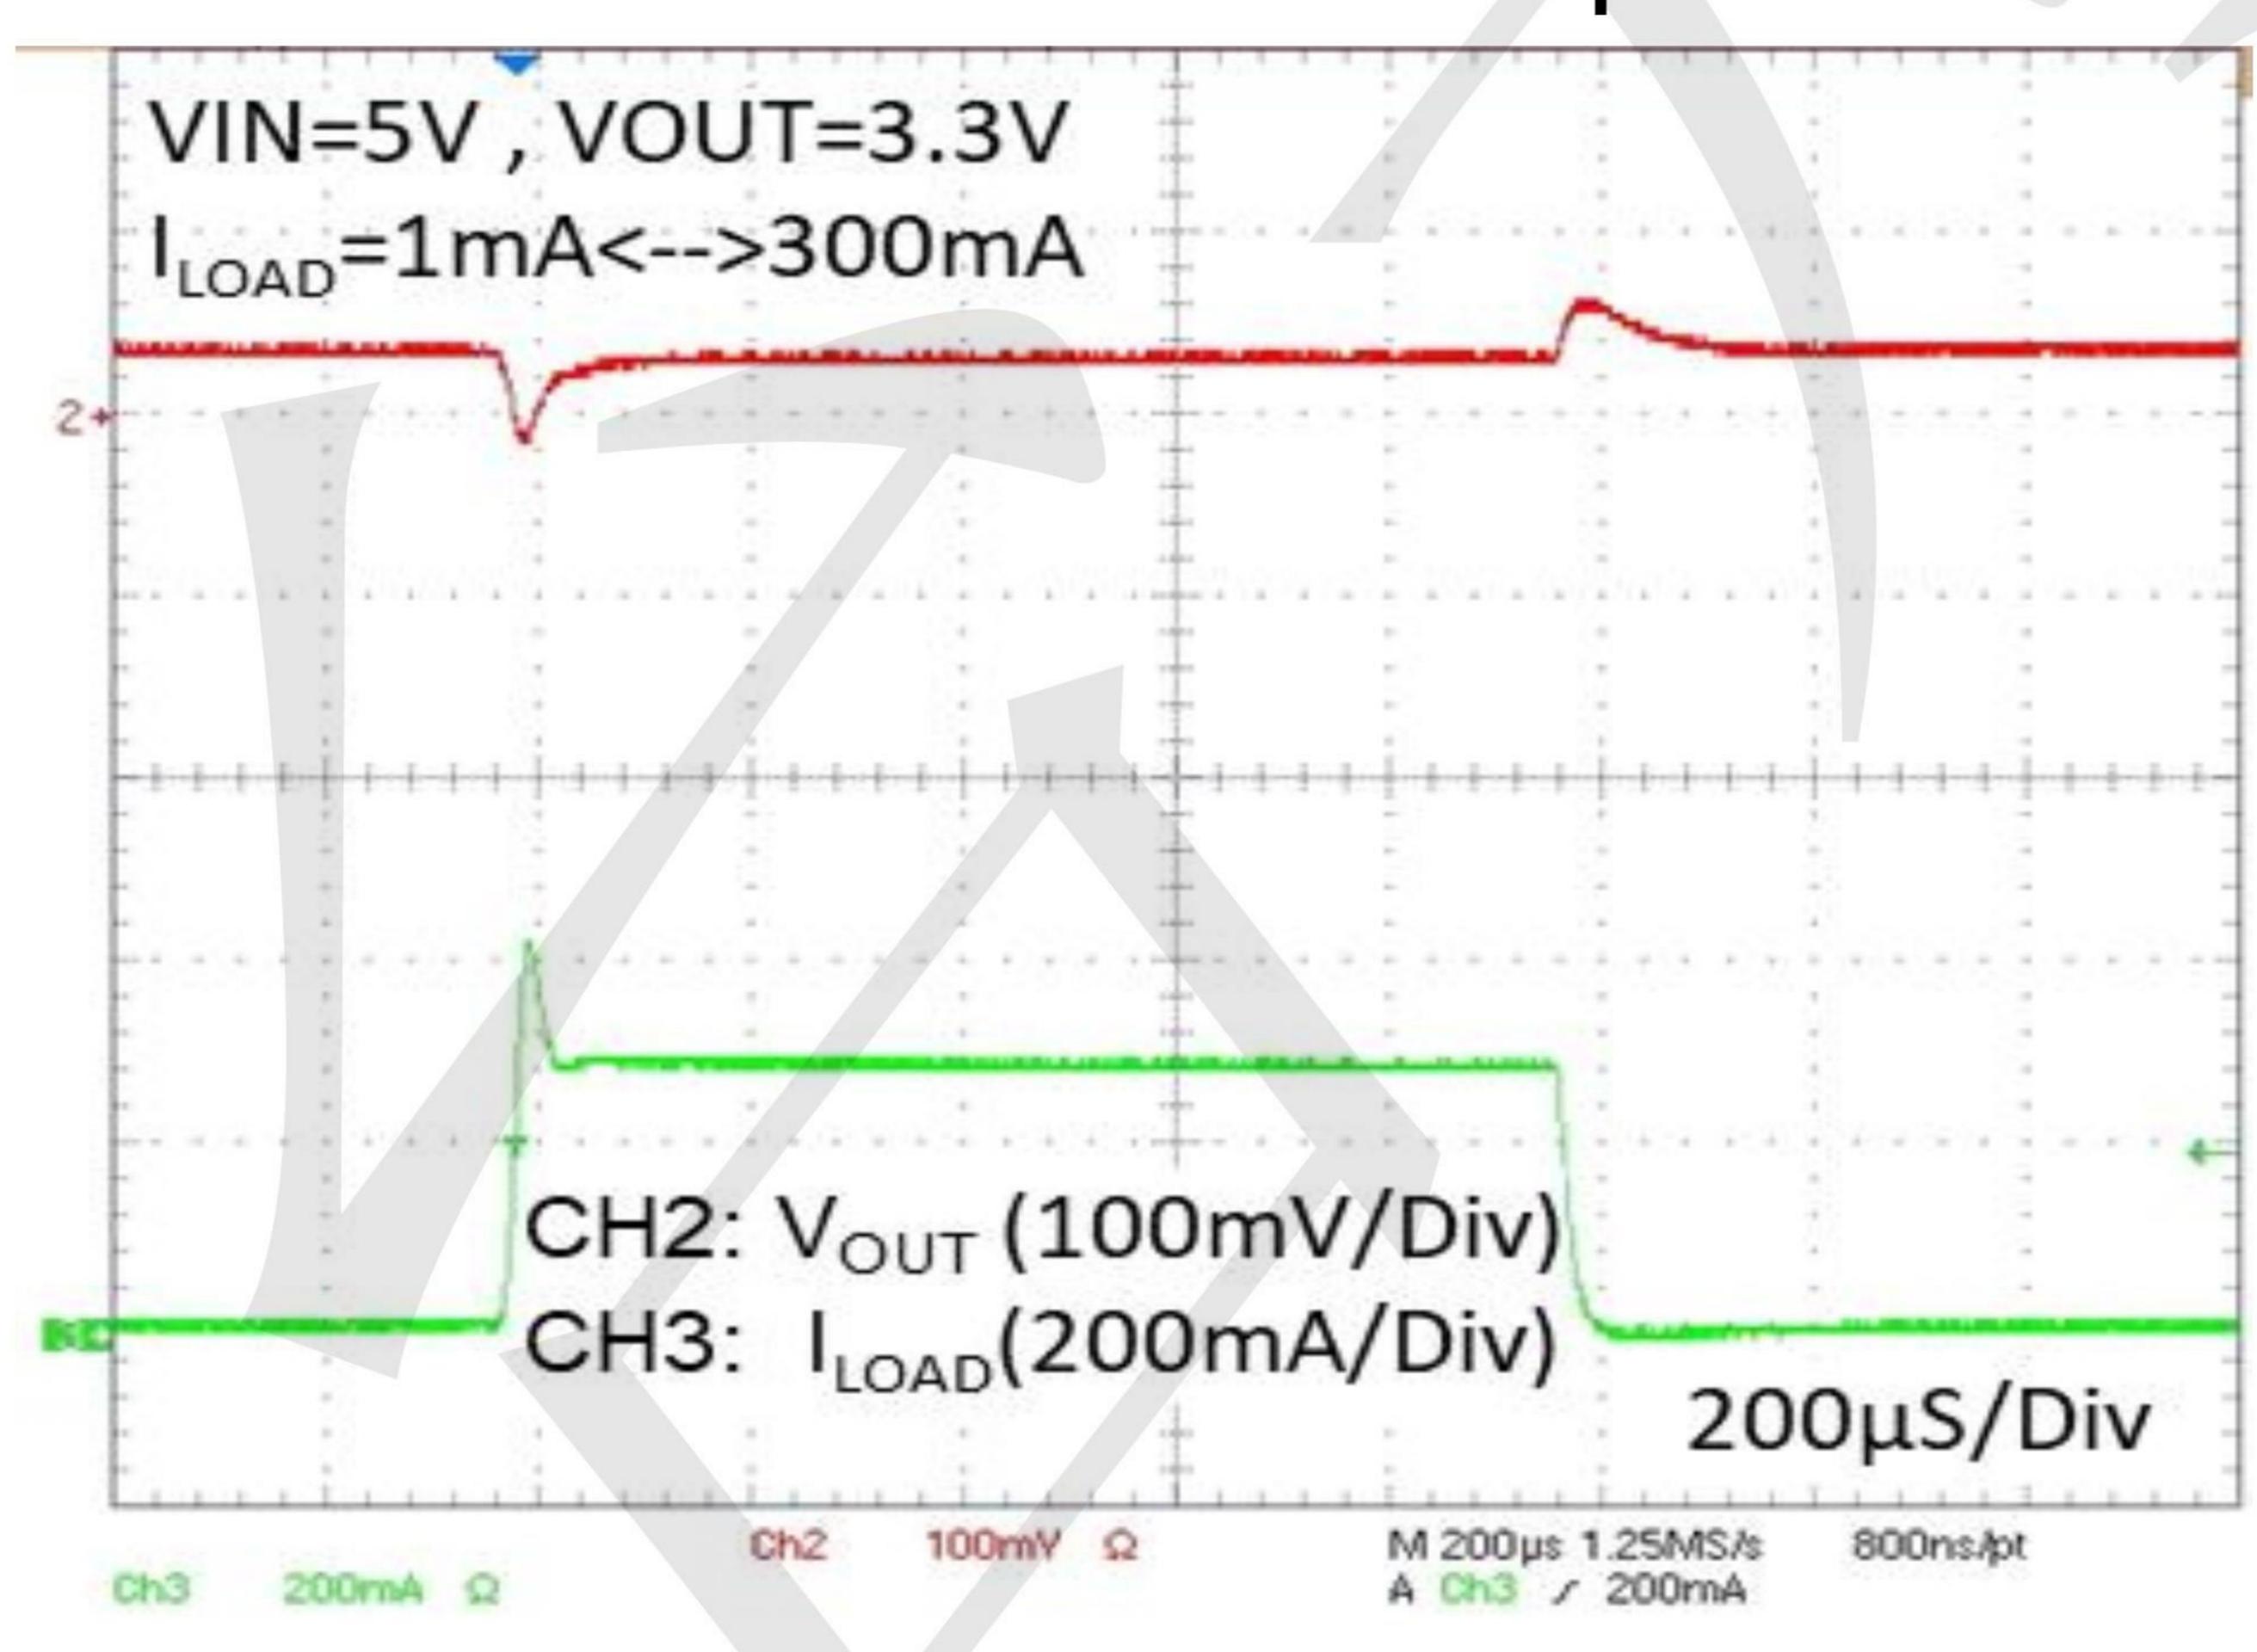

#### Load Transient Response II

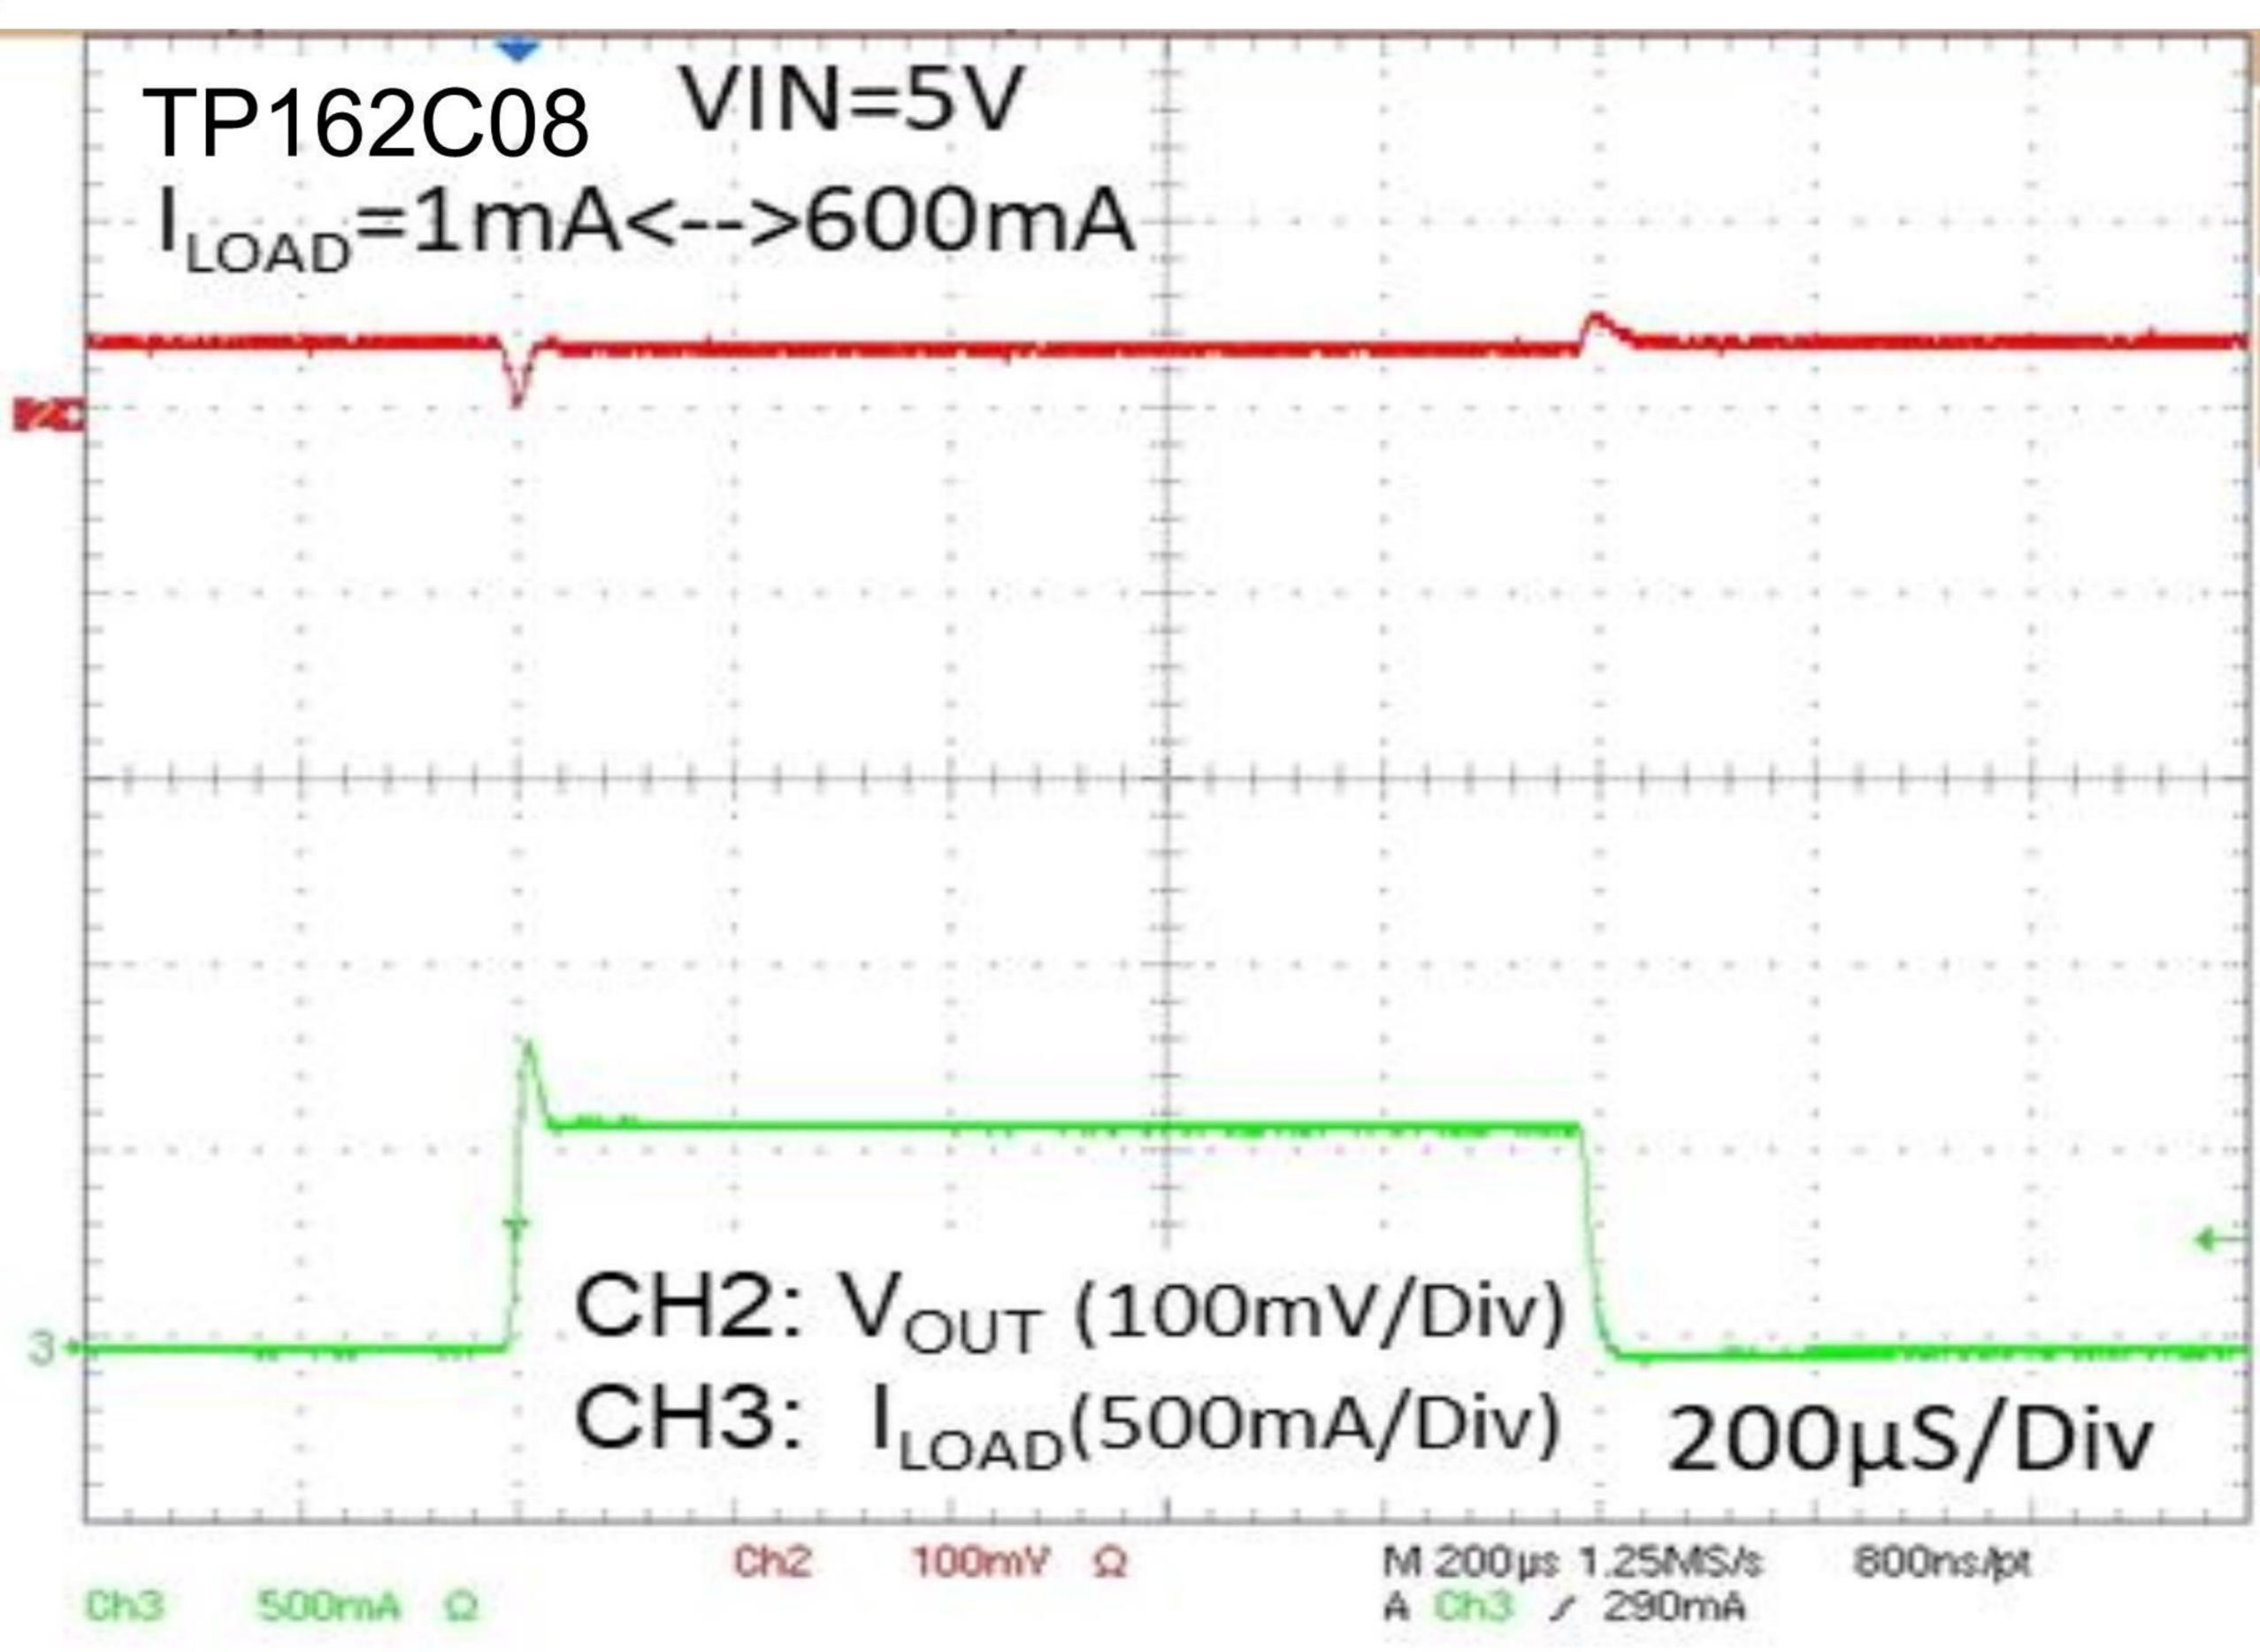

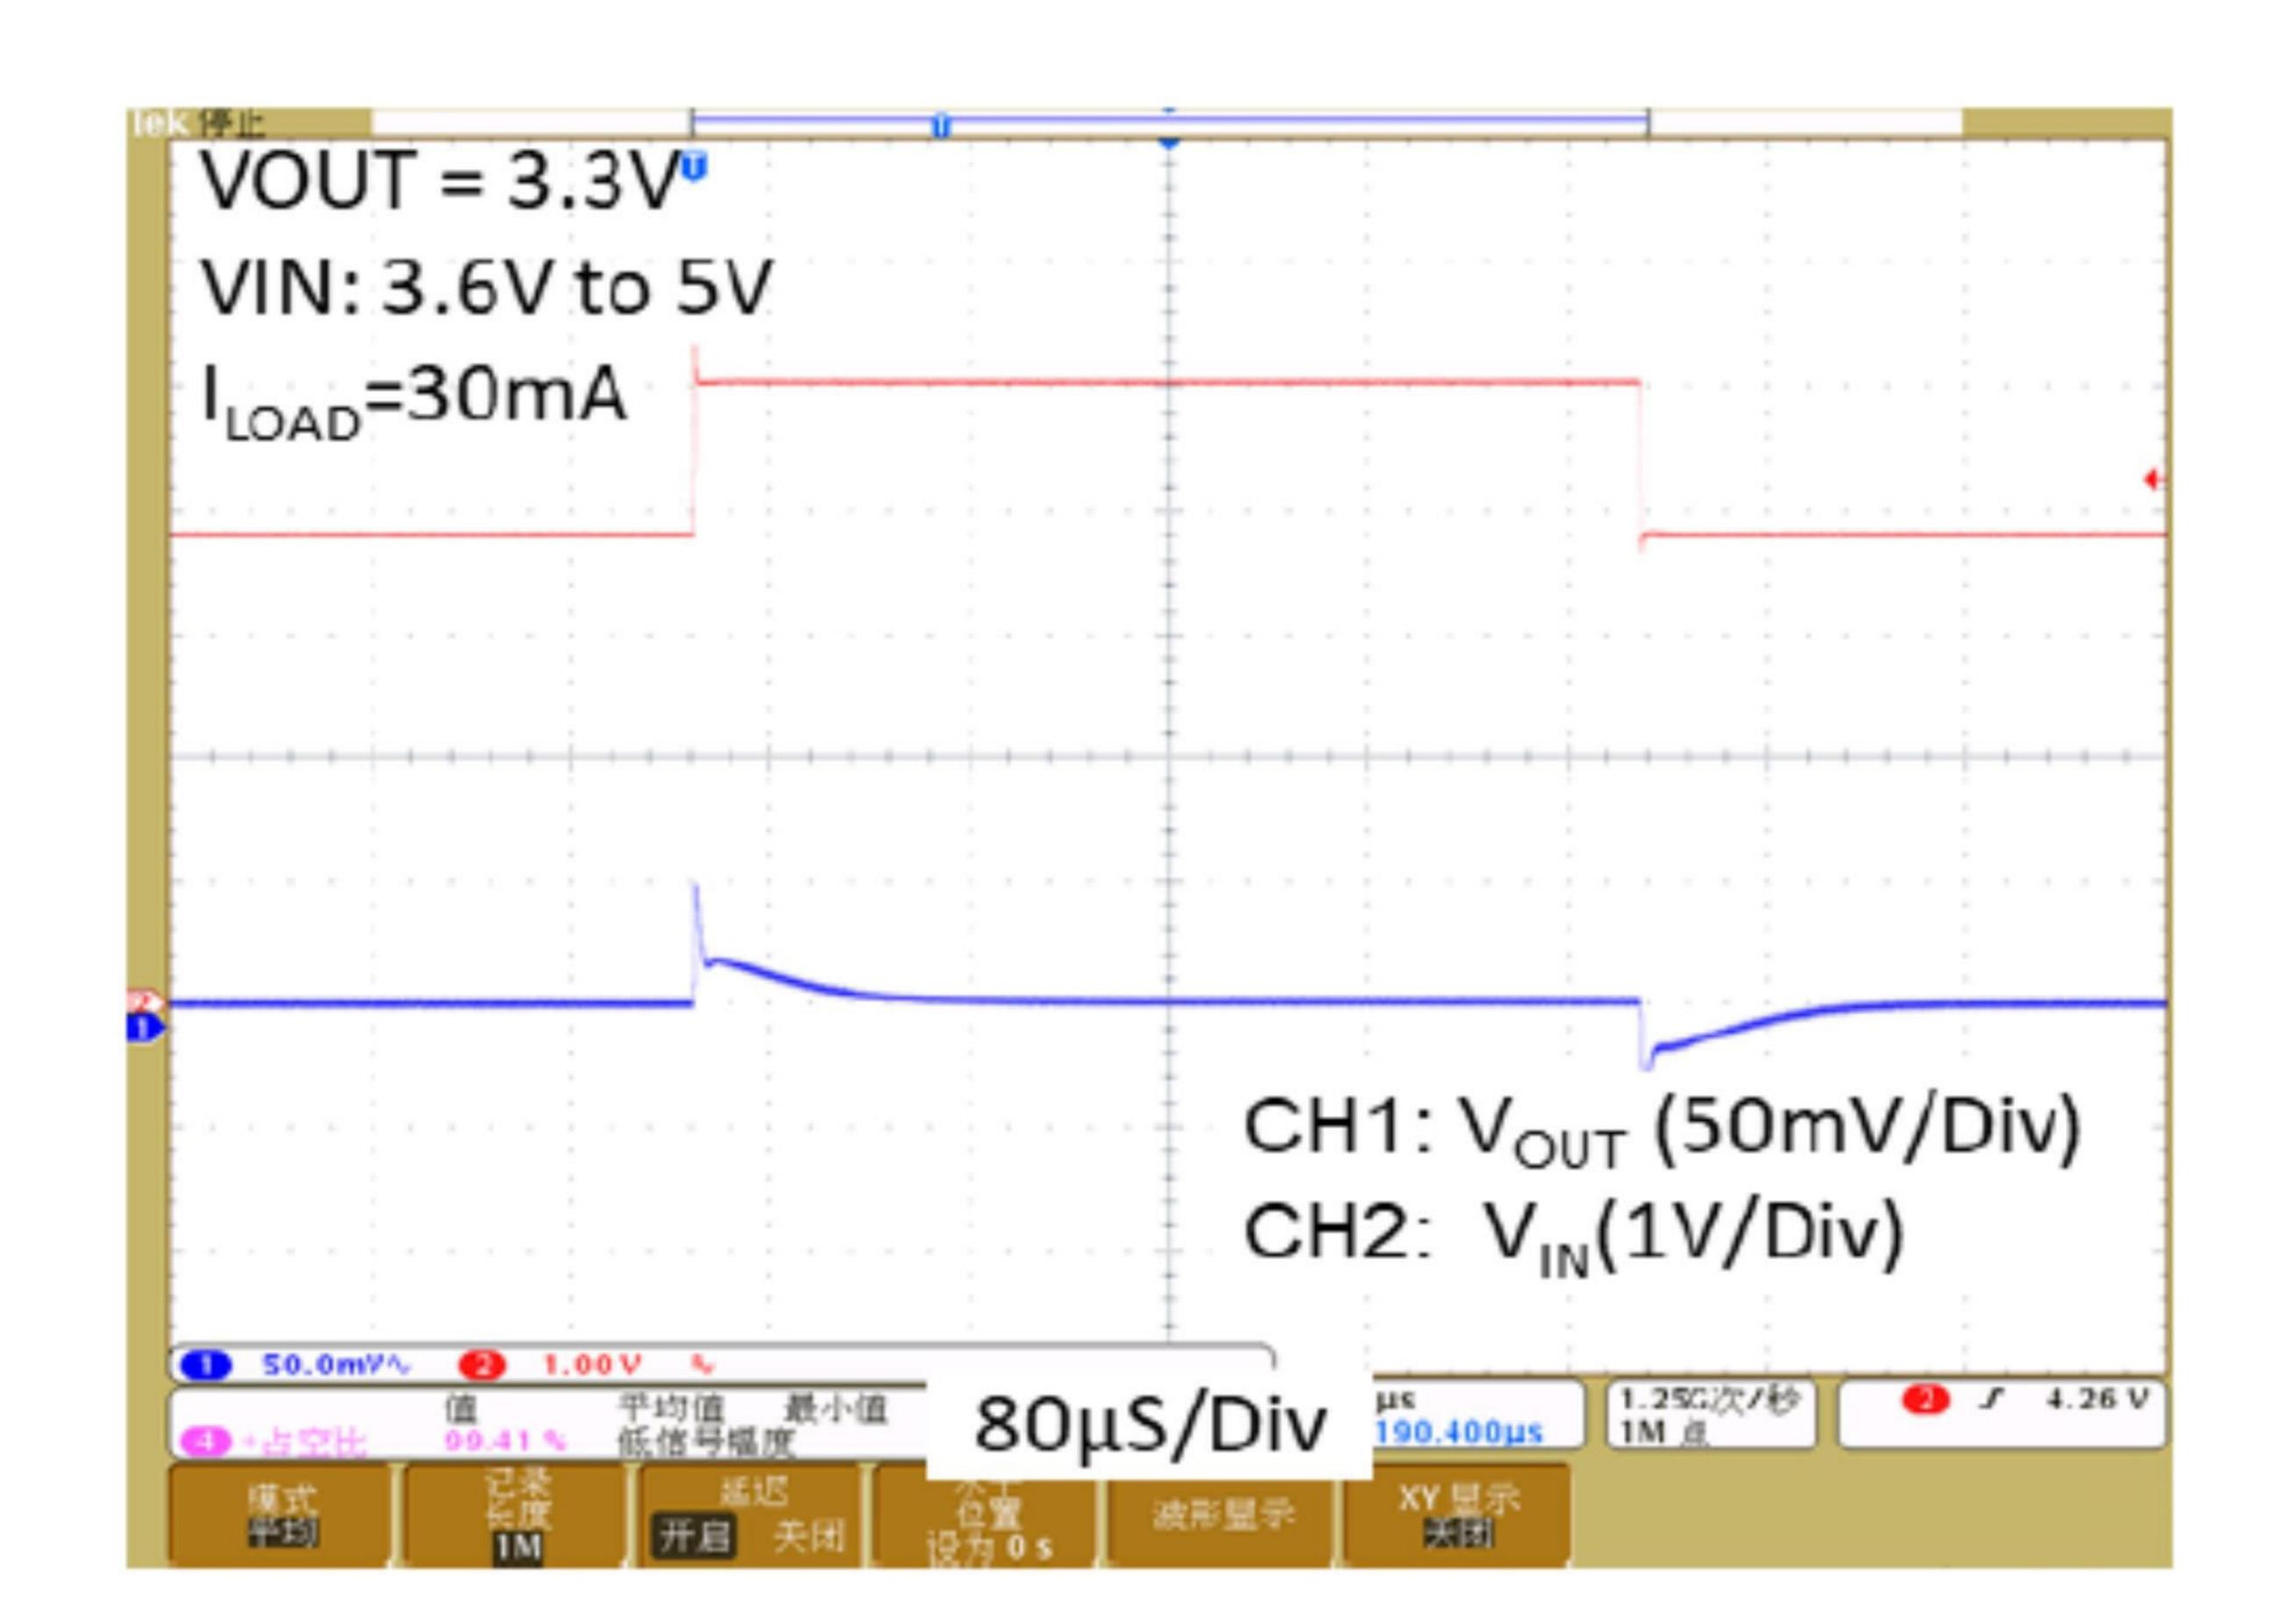


Fig. 17 Line Transient Response

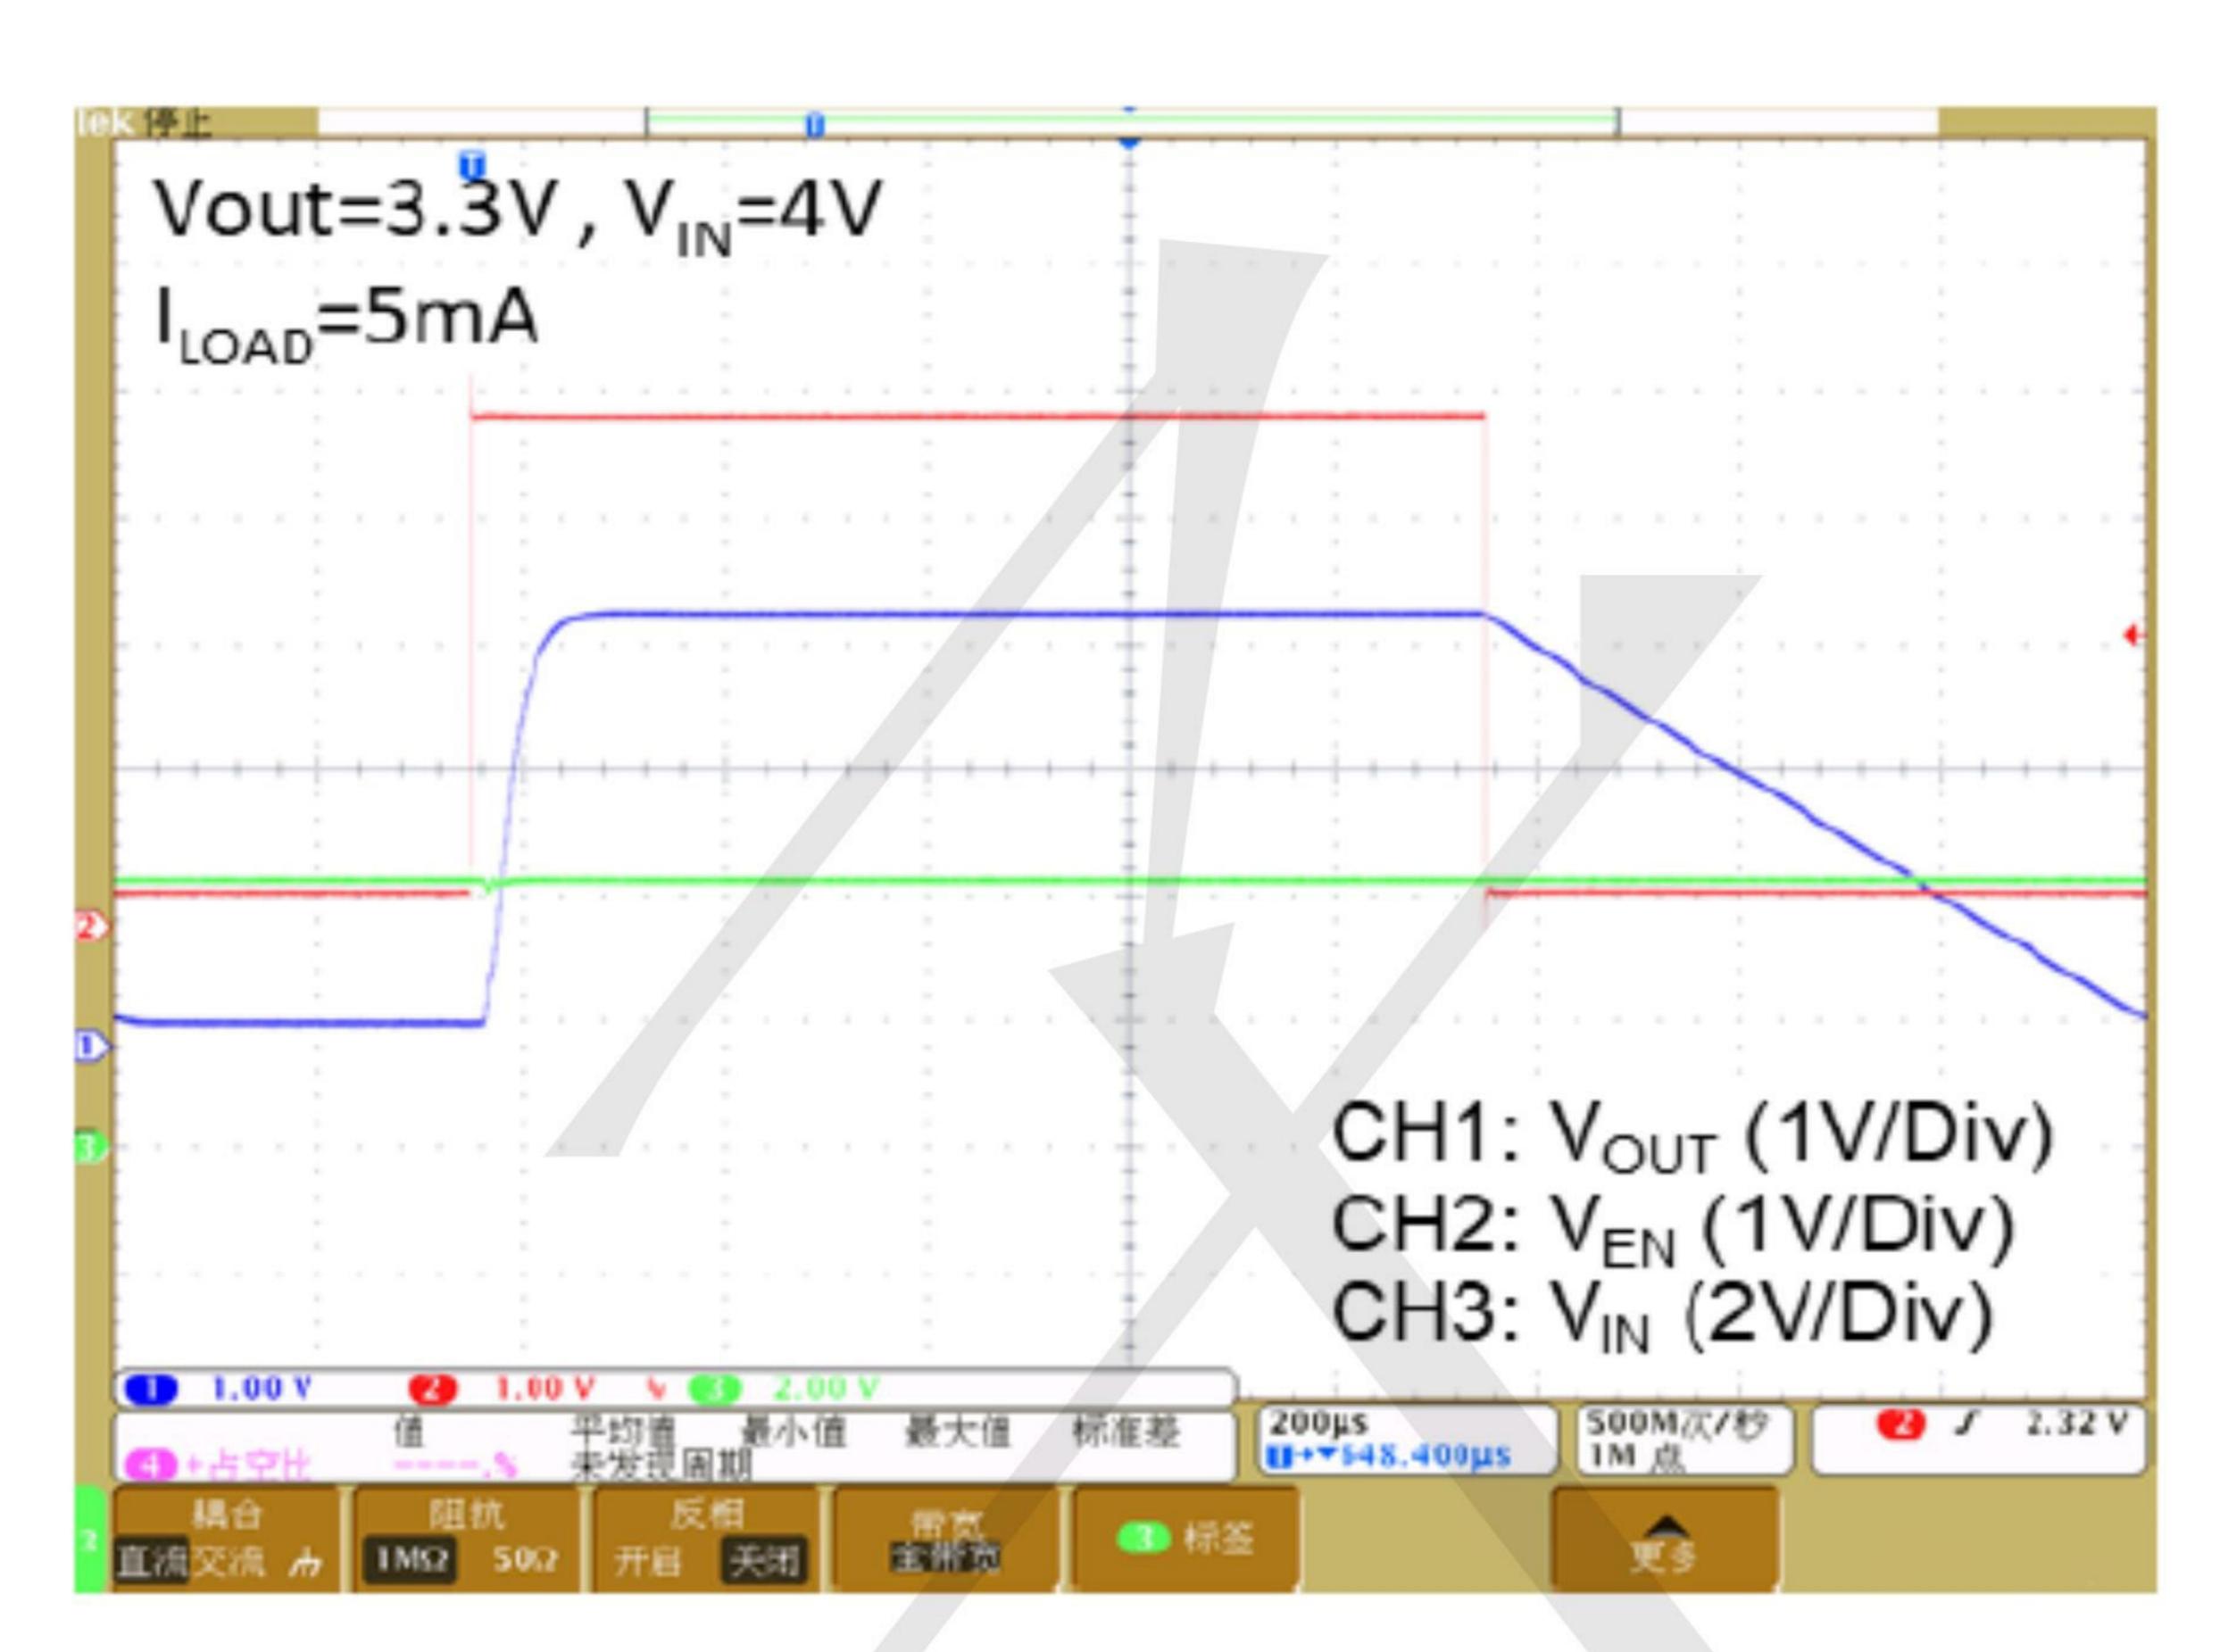



Fig. 18 V<sub>OUT</sub> Turn On/Off by EN



#### 600mA,2uA, Higt PSRR Voltage Reaulators

www.sot23.com.tw

#### BLOCK DIAGRAM

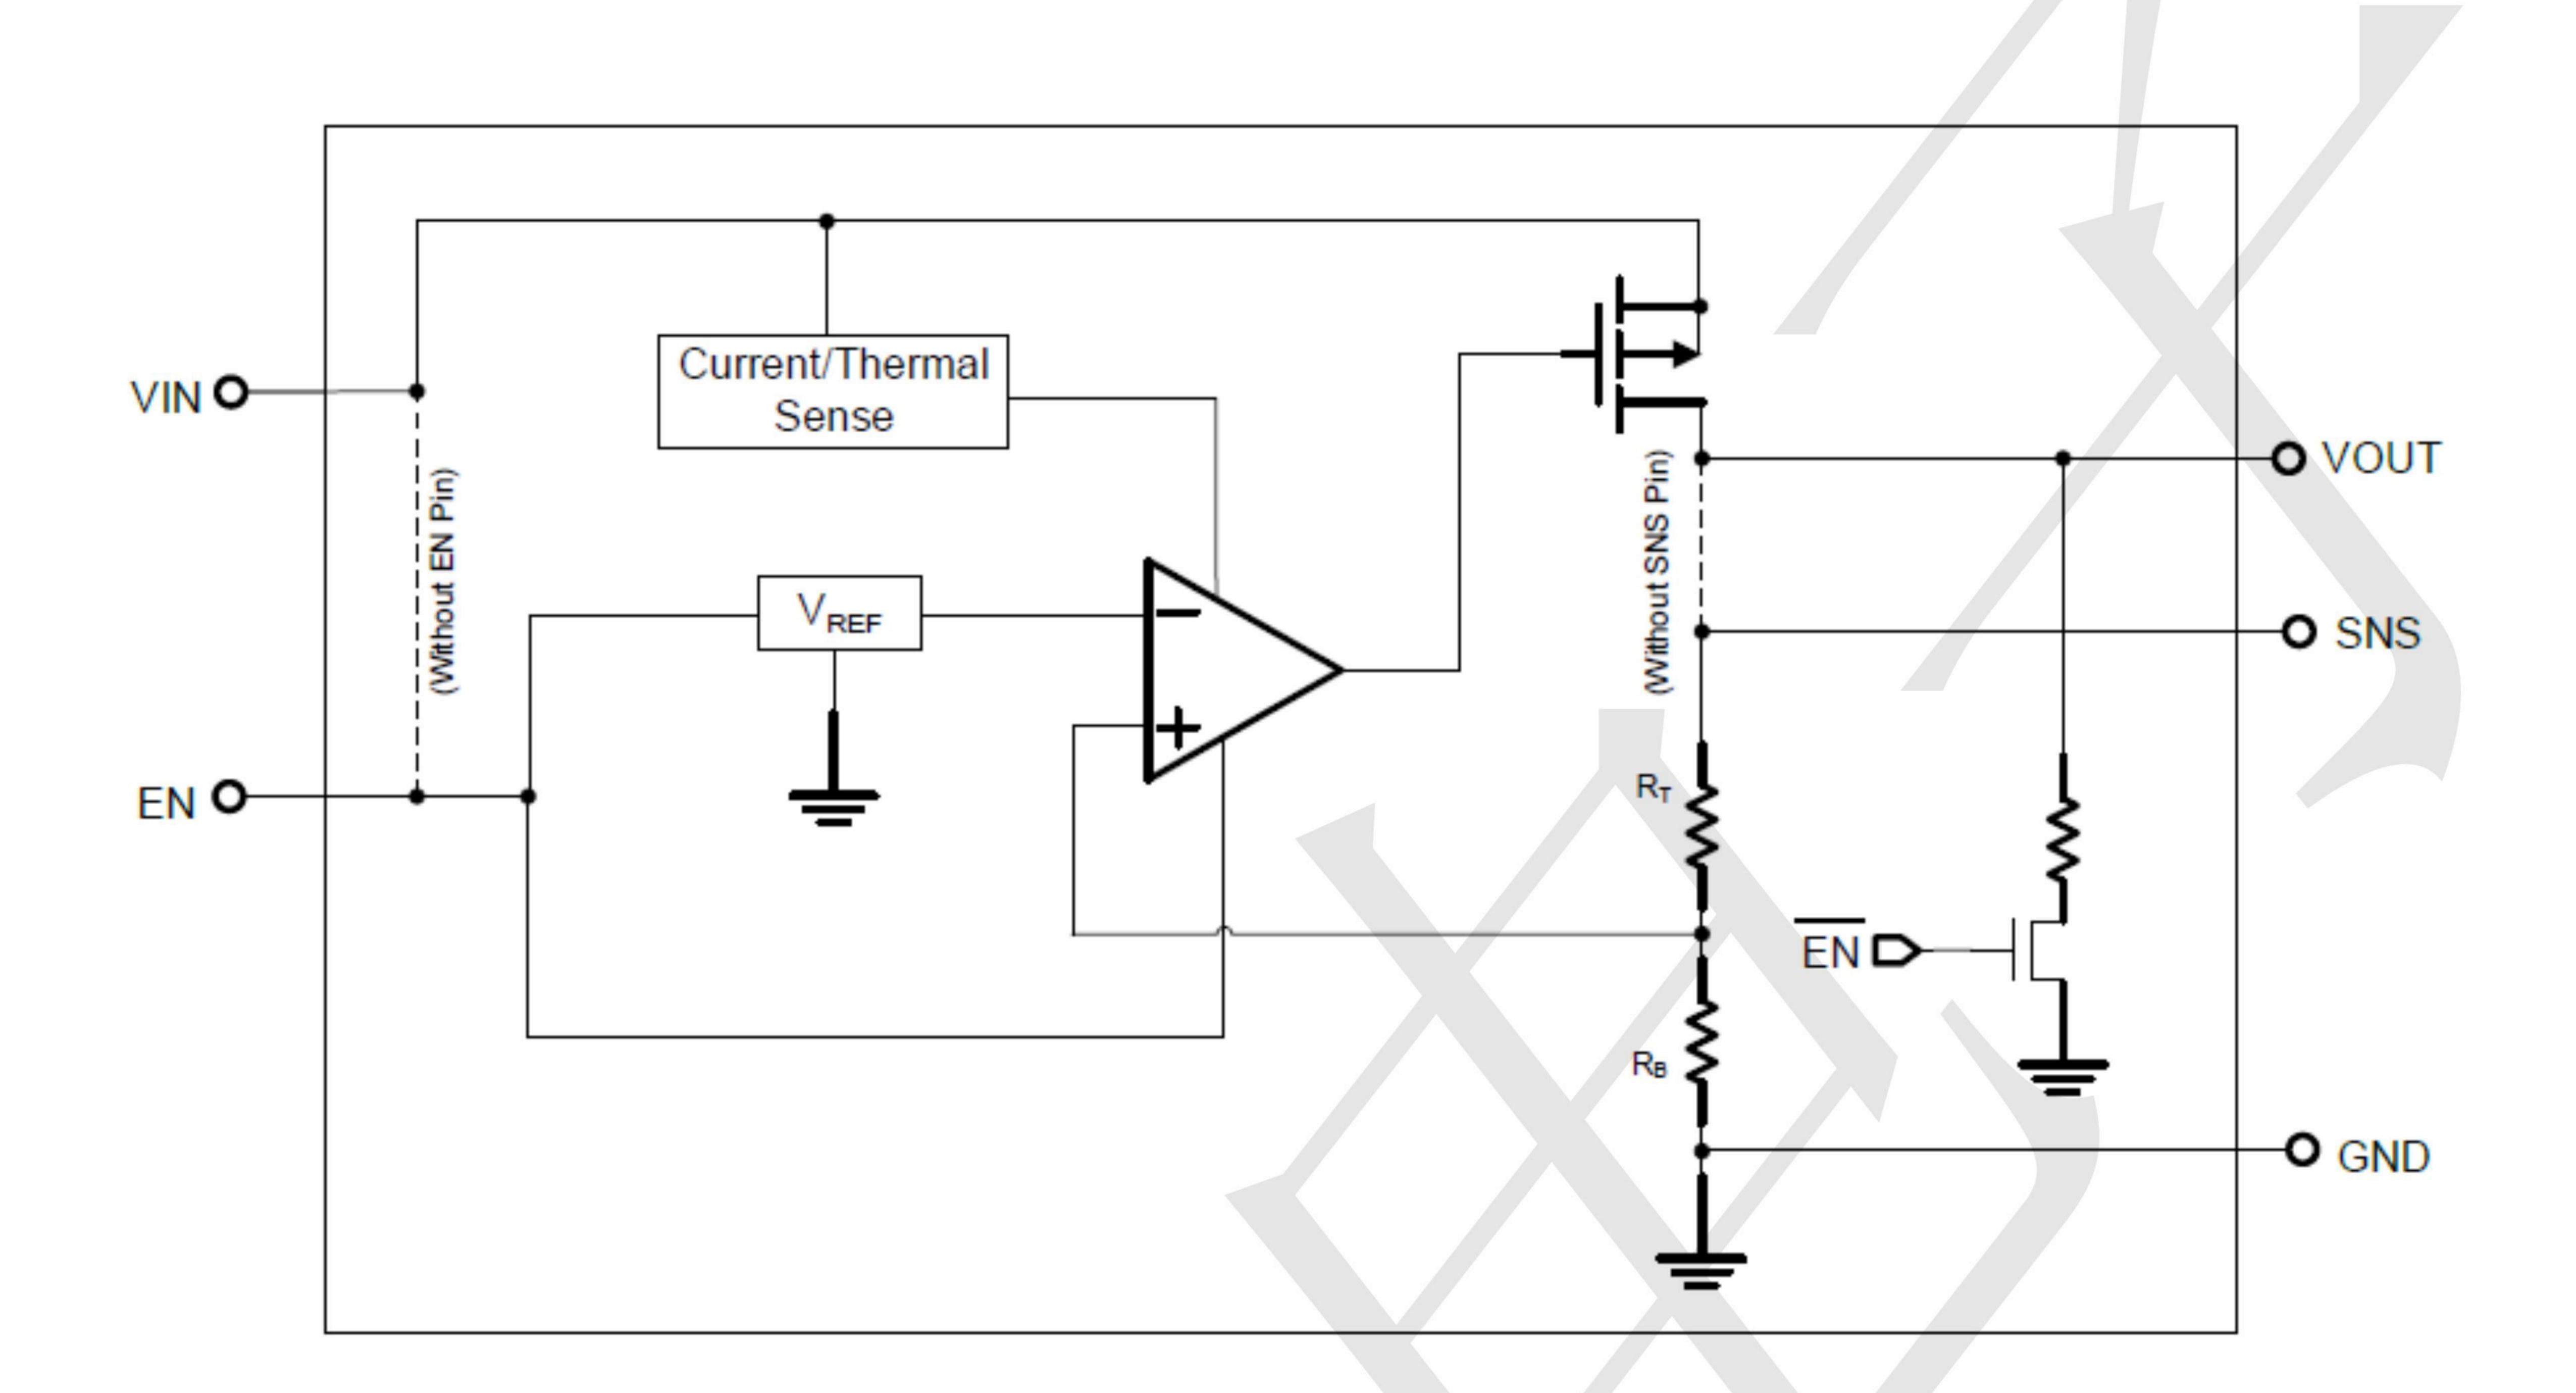






#### 600mA,2uA, Higt PSRR Voltage Reaulators

www.sot23.com.tw

## Package informantion SOT23-5

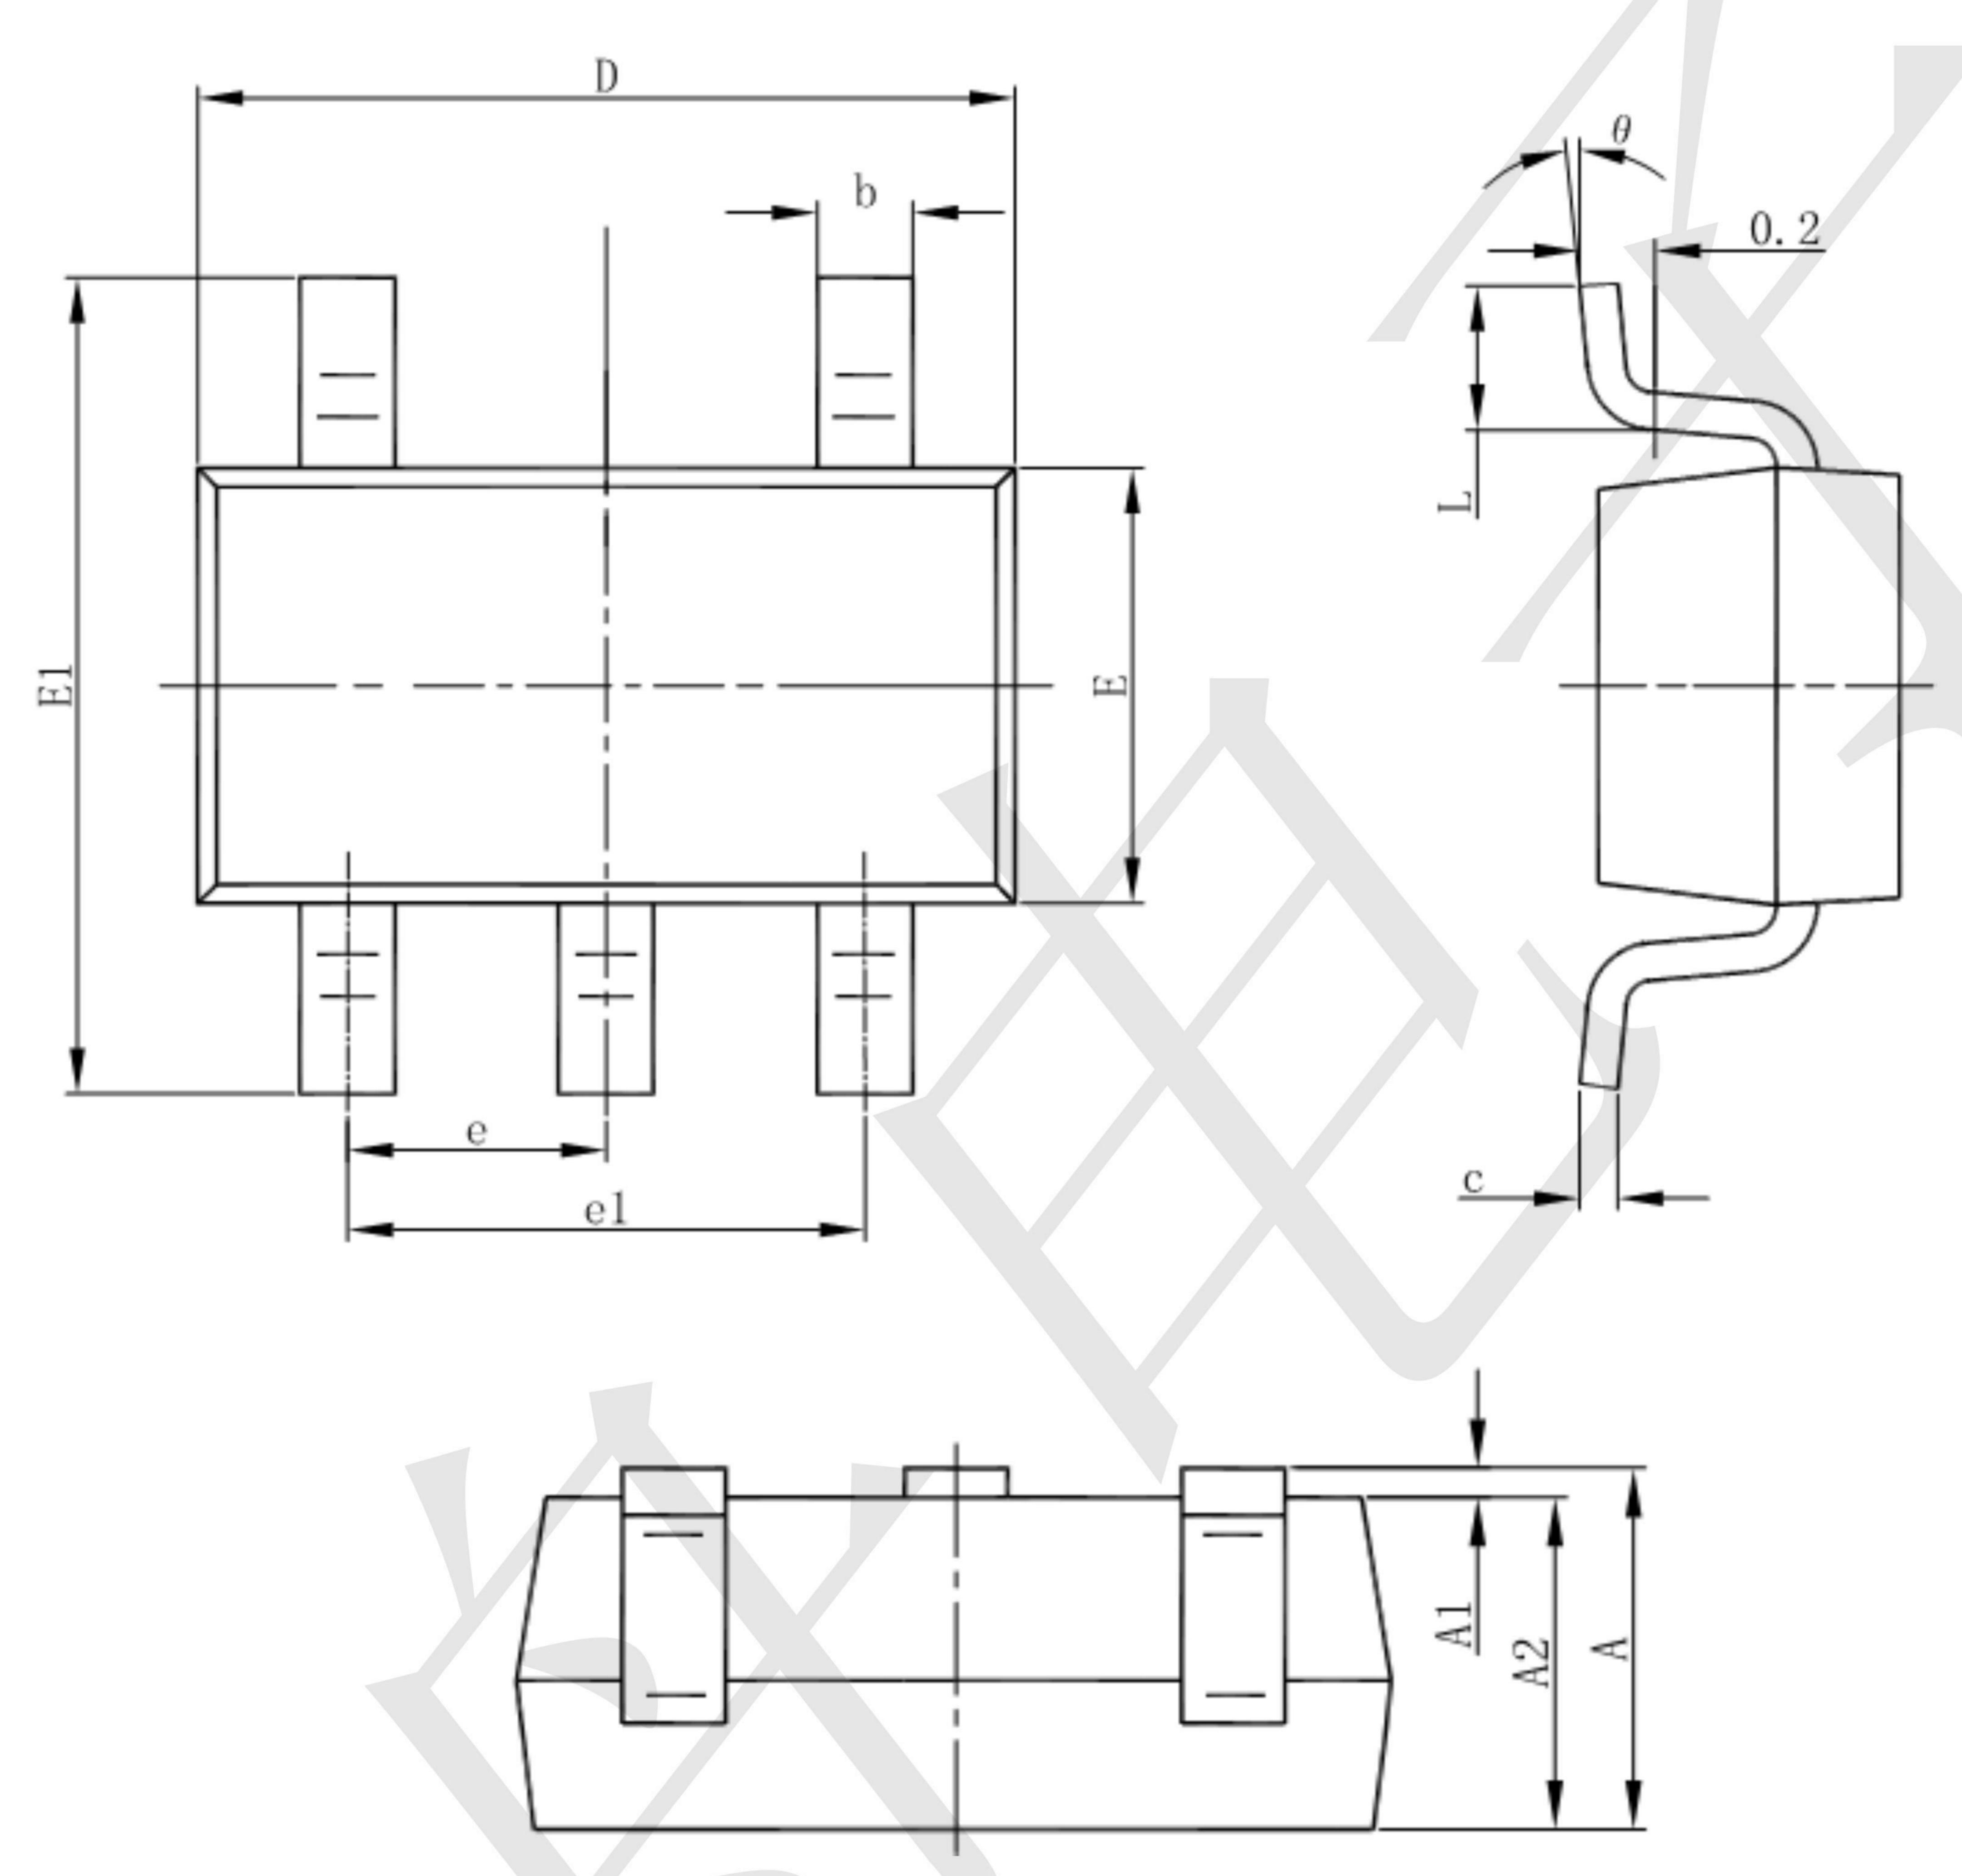

C	Dimensions In	Millimeters	Dimensions In Inches		
Symbol	Mi	Max	Min	Max	
A	1.050	1.250	0.041	0.049	
A1	0.000	0.100	0.000	0.004	
A2	1.050	1.150	0.041	0.045	
b	0.300	0.500	0.012	0.020	
C	0.100	0.200	0.004	0.008	
D	2.820	3.020	0.111	0.119	
E	1.500	1.700	0.059	0.067	
E1	2.650	2.950	0.104	0.116	
е	0.950(BSC)		0.037(BSC)		
e1	1.800	2.000	0.071	0.079	
L	0.300	0.600	0.012	0.024	
θ	0°	8°	0°	8°	

#### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LDO Voltage Regulators category:

Click to view products by TECH PUBLIC manufacturer:

Other Similar products are found below:

AP7363-SP-13 NCV8664CST33T3G L79M05TL-E AP7362-HA-7 PT7M8202B12TA5EX TCR3DF185,LM(CT TLF4949EJ
NCP4687DH15T1G NCV8703MX30TCG LP2951CN NCV4269CPD50R2G AP7315-25W5-7 NCV47411PAAJR2G AP2111H-1.2TRG1
ZLDO1117QK50TC AZ1117ID-ADJTRG1 NCV4263-2CPD50R2G NCP114BMX075TCG MC33269T-3.5G TLE4471GXT AP7315-33SA7 NCV4266-2CST33T3G NCP715SQ15T2G NCV8623MN-50R2G NCV563SQ18T1G NCV8664CDT33RKG NCV4299CD250R2G
NCV8702MX25TCG TLE7270-2E NCV562SQ25T1G AP2213D-3.3TRG1 AP2202K-2.6TRE1 NCV8170BMX300TCG
NCV8152MX300180TCG NCP700CMT45TBG AP7315-33W5-7 NCP154MX180300TAG AP2210K-3.0TRE1 AP2113AMTR-G1
NJW4104U2-33A-TE1 MP2013AGG-5-P NCV8775CDT50RKG NJM2878F3-45-TE1 S-19214B00A-V5T2U7 S-19214B50A-V5T2U7 S19213B50A-V5T2U7 S-19214BC0A-E8T1U7\*1 S-19213B00A-V5T2U7 S-19213B33A-V5T2U7 S-19213BC0A-V5T2U7