

500mA,5uA, Higt PSRR Voltage Reaulators

www.sot23.com.tw

Features

- 5µA Ground Current at no Load
- ±2% Output Accuracy
- 500mA Output Current
- 10nA Disable Current (by option)
- Wide Operating Input Voltage Range: 1.2V to 5.5V
- Dropout Voltage: 0.32V at 600mA/ Vout 3.3V
- Support Fixed Output Voltage 1.2V, 1.5V, 1.6V, 1.8V,
 2.5V, 2.8V, 3.0V, 3.3V
- Stable with Ceramic or Tantalum Capacitor
- Current Limit Protection
 Over Temperature Protection
- SOT23-5 Packages

Applications

- Portable, Battery Powered Equipment
- Low Power Microcontrollers
- Laptop, Palmtops and PDAs
- Wireless Communication Equipment
- Audio/Video Equipment
- Car Navigation Systems

General Descri tion

This production is group of low -dropout (LDO) voltage regulators offering the benefits of wide input voltage range from 1.2V to 5.5V, low dropout voltage, low power consumption, and miniaturized packaging. Quiescent current of only 5µA makes these devices ideal for powering the battery-powered, always-on systems that require very little idle=state power dissipation to a longer service life. There is an option of

shutdown mode by selecting the parts with the EN pin and pulling it low. The shutdown current in this mode goes down to only 10nA (typical).

This production is of linear regulators are stable with the ceramic output capacitor over its wide input range from 1.2V to 5.5V and the entire range of output load current (0mA to 500mA).

Ordering Information

TPTLV75518PDBVR

Output voltage: 12=1.2V

15=1.5V

18=1.8V

30 = 3.0 V


33=3.3V



500mA,5uA, Higt PSRR Voltage Reaulators

www.sot23.com.tw

PIN CONFIGURATION

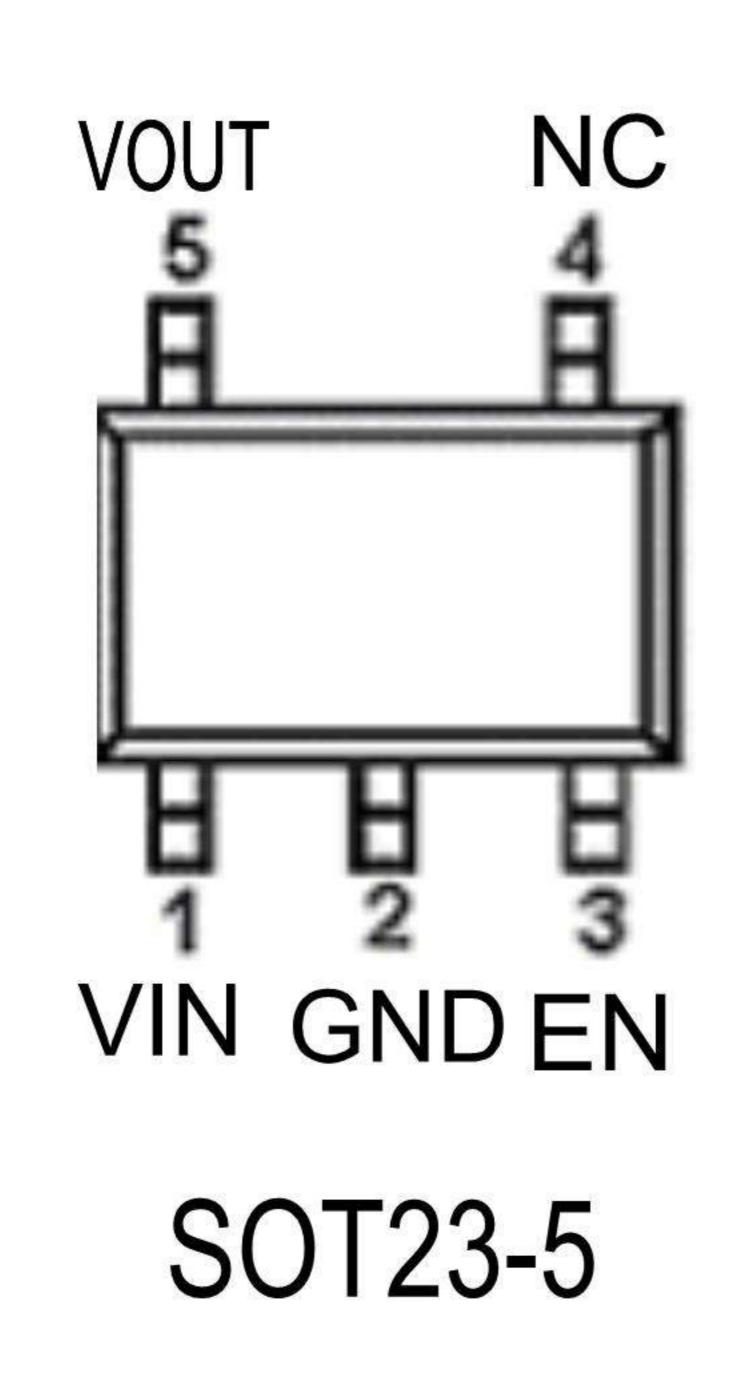

Typical Application Circuit

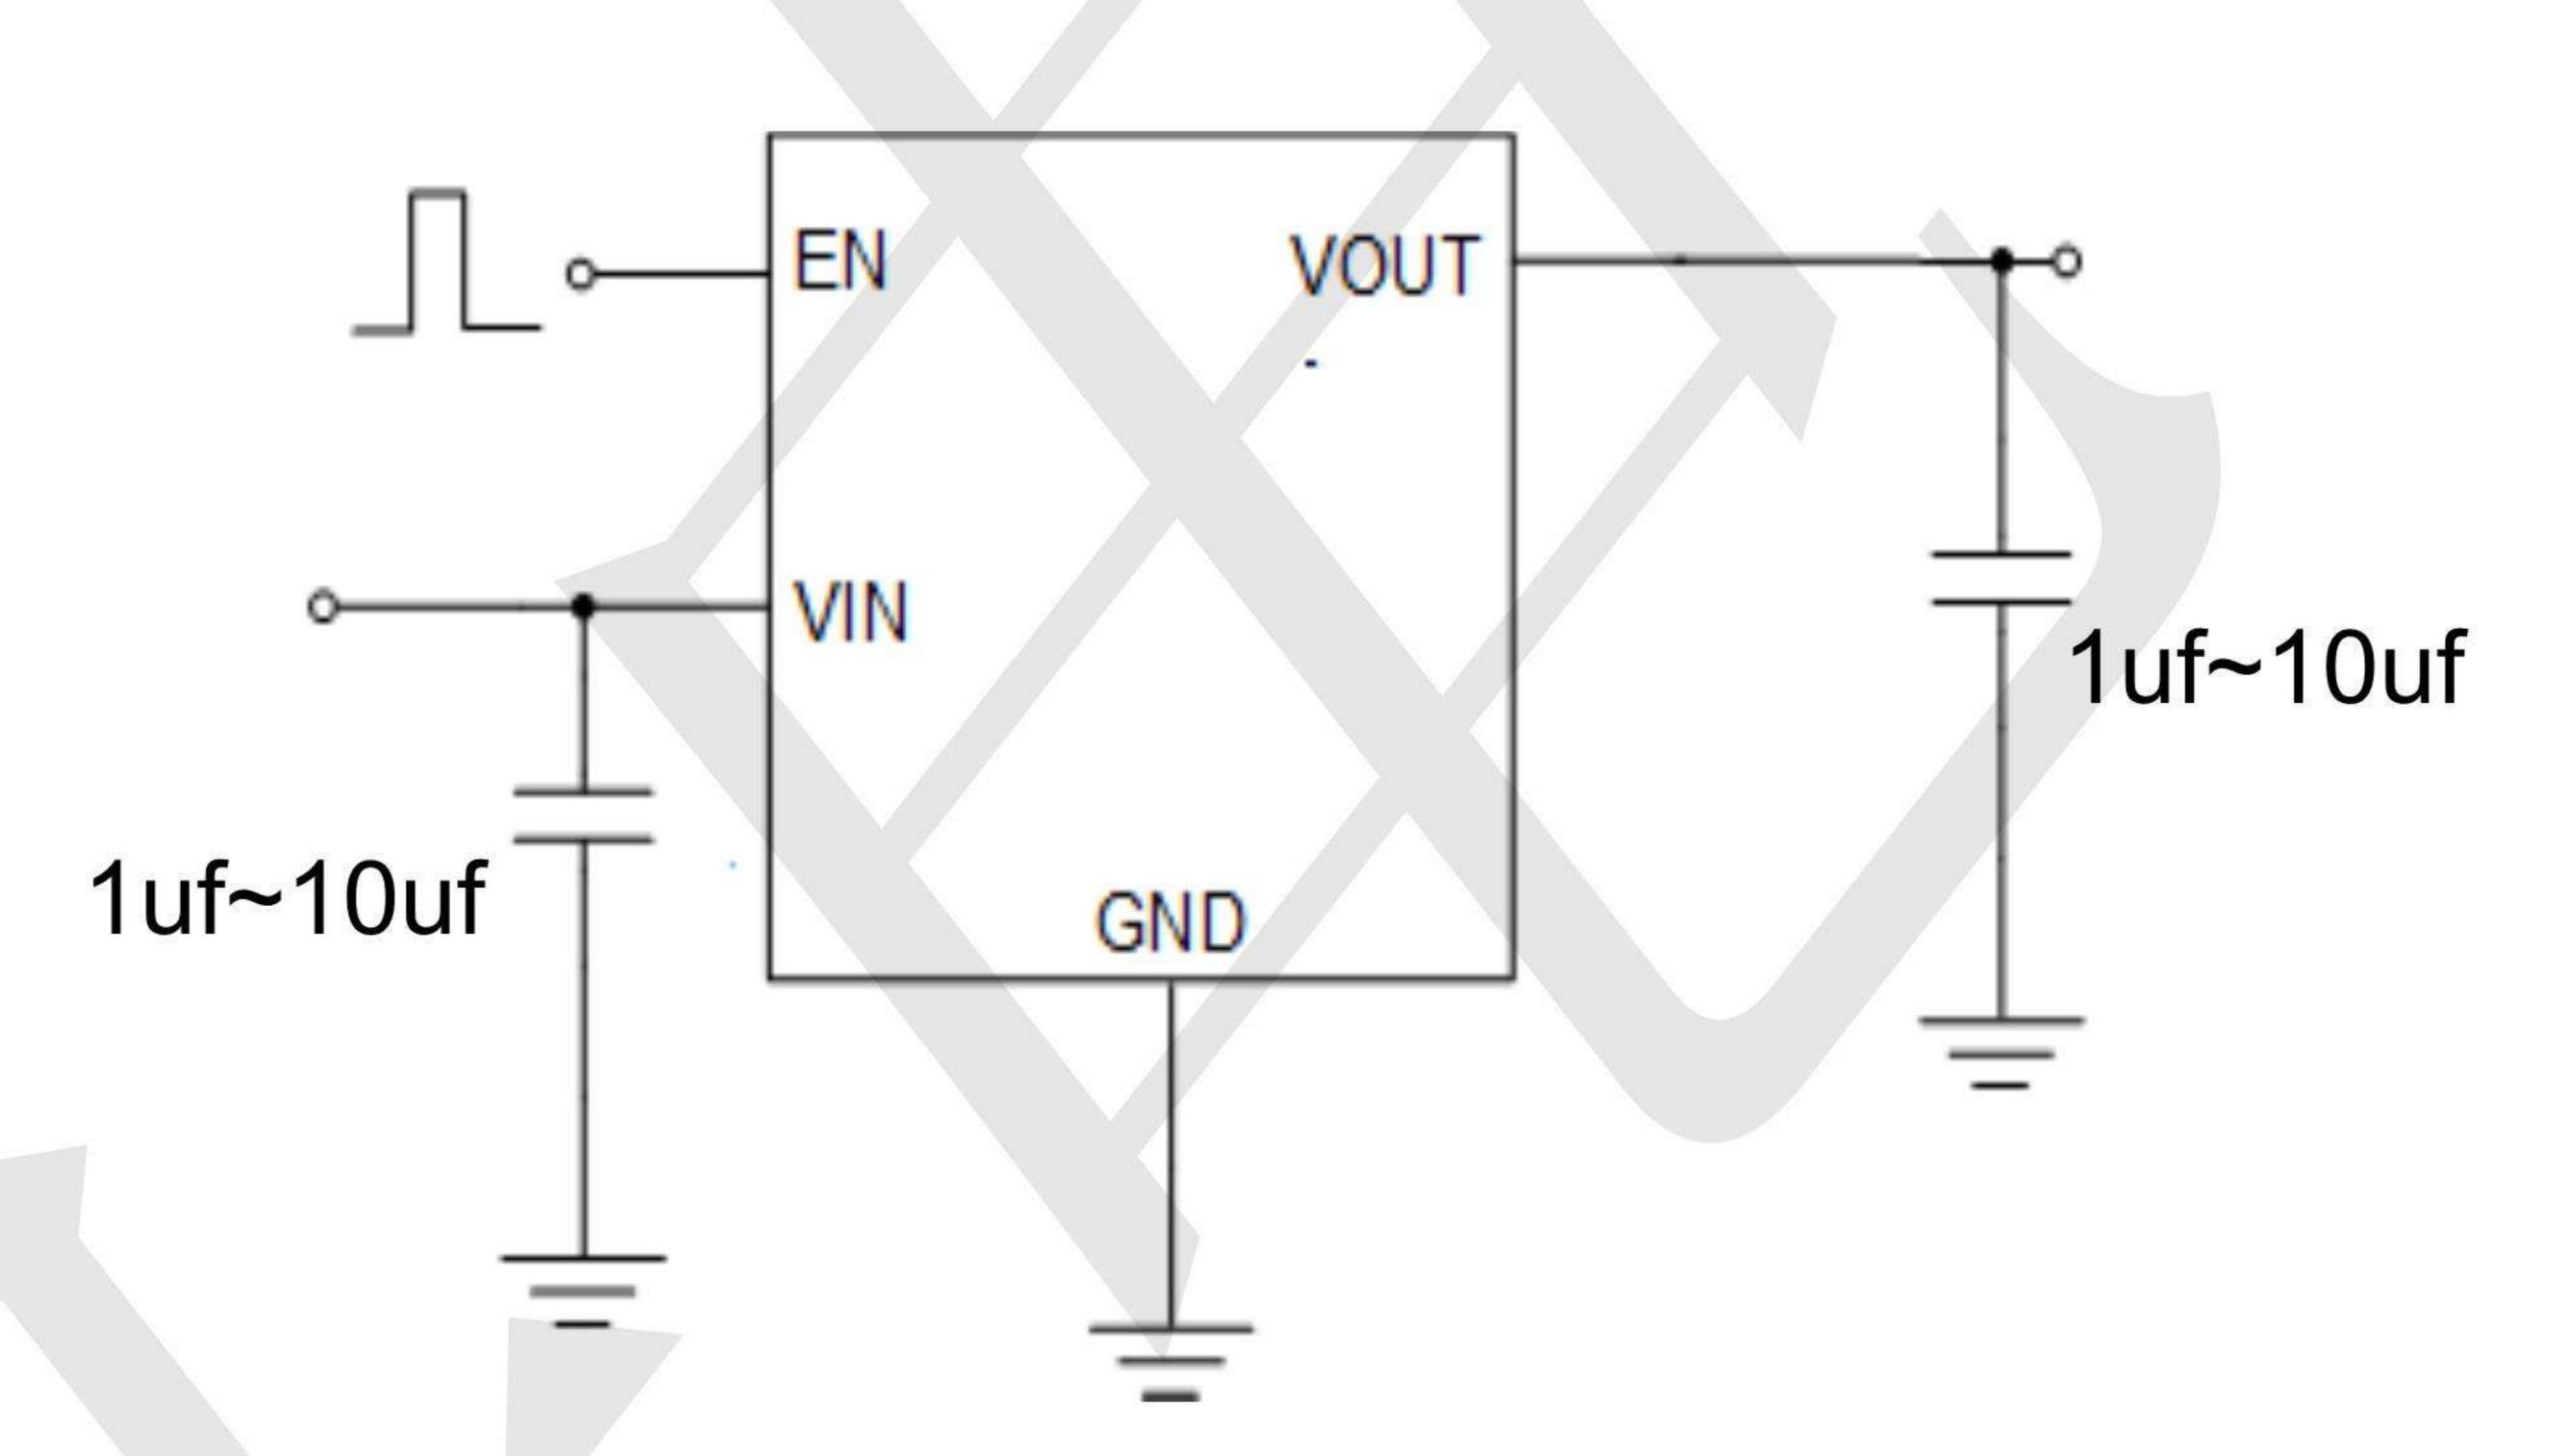


Figure 2: Application circuit of Fixed Vout LDO with enable function

ABSOLUTE MAXIMUM RATINGS

VIN Pin to GND Pin Voltage			0.3V to 6.5V	
VOUT Pin and EN	oltage		0.3V to 6V	
VOUT Pin to VIN Pin Voltage			6V to 0.3V	
Storage Temperature Range			60°C~150°C	
Lead Temperature (Soldering, 10 sec)				
Junction Temperature			150°C	
Operating Ambient Temperature Ran	nge T _A		40°C~85°C	
Thermal Resistance Junction to Case, RθJc		SOT23-3	115°C/W	
Thermal Resistance Junction to Ambient, Rθ _{JA}	SOT23-5	115°C/W		
	DFN-4(1x1)	65°C/W		
	DFN-6(2x2)	30°C/W		
	pient, Rθja	SOT23-3	250°C/W	
		SOT23-5	250°C/W	
		DFN-4(1x1)	195°C/W	
	DFN-6(2x2)	165°C/W		



500mA,5uA, Higt PSRR Voltage Reaulators

www.sot23.com.tw

Electrical Characteristics (TA=25 C unless otherwise noted)

 $(V_{IN} = 5V, V_{EN} = 5V T_A = 25^{\circ}C \text{ unless otherwise specified})$

Parameter	Symbol	Test Conditions		Min	Тур	Max	Unit
Supply Voltage	VIN			1.2		5.5	
DC Output Voltage Accuracy		ILOAD =0	.1mA	-2		2	%
Dropout Voltage (I _{LOAD} =600mA) (Note 3)	V _{DROP_3V}	Vout ≥ 3V			0.32		
	V _{DROP_2.8} V	V _{OUT} = 2.8V			0.36		
	VDROP_2.5V	Vout = 2	Vout = 2.5V		0.36		
	VDROP_1.8V	V _{OUT} = 1.8V			0.57		
	VDROP_1.5V	V _{OUT} = 1.5V			0.71		
		V = 1.2V			0.8		
Ground Current	IQ	ILOAD = C)mA		2		μΑ
Shutdown Ground Current	ISD	$V_{EN}=0$			0.01	0.5	
Vout Shutdown Leakage Current	ILEAK	$V_{OUT} = C$	$V_{OUT} = 0V$		0.01	0.5	μA
	V _I H	EN Rising				2	
Enable Threshold Voltage	able Threshold Voltage VIL EN Falling		0.6				
EN Input Current	IEN	$V_{EN} = 5V$			10	100	nA
Line Regulation	ΔLINE	1.5V ≤ \	$I_{LOAD} = 30 \text{mA},$ $1.5 \text{V} \le \text{V}_{IN} \le 5.5 \text{V} \text{ or}$ $(\text{Vout} + 0.2 \text{V}) \le \text{V}_{IN} \le 5.5 \text{V}$		0.2		%
Load Regulation	ΔLOAD	$10\text{mA} \le I_{\text{LOAD}} \le 0.3\text{A}$			0.2		%
Output Current Limit	ILIM	Vout =0		601	1100		mA
		Vout	f = 100Hz		80		
Power Supply Rejection Ratio (ILOAD =5mA)	PSRR	=1.2V, V _{IN} =	f = 1kHz		75		dB
Output Waltaga Naica		V _{IN} =	V _{OUT} =0.9V		40		
Output Voltage Noise (BW = 10Hz to 100kHz, Cout = 1µF,)		3.5V ILOAD =0.1A	V _{OUT} =2.8V		50		μVRMS
Thermal Shutdown Temperature	Tsd	I _{LOAD} =10mA			155		°C
Thermal Shutdown Hysteresis	ΔT_{SD}				15		°C
Discharge Resistance		$EN = 0V$, $V_{OUT} = 0.1V$			100		Ω



500mA,5uA, Higt PSRR Voltage Reaulators

www.sot23.com.tw

- **Note 1.** Stresses beyond those listed "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions may affect device reliability.
- **Note 2.** θ_{JA} is measured at $T_A = 25^{\circ}C$ on a TECH PUBLICboard.
- Note 3. VDROP = VIN VOUT when the VOUT is 98% of its target value.





500mA,5uA, Higt PSRR Voltage Reaulators

www.sot23.com.tw

Typical Characteristics

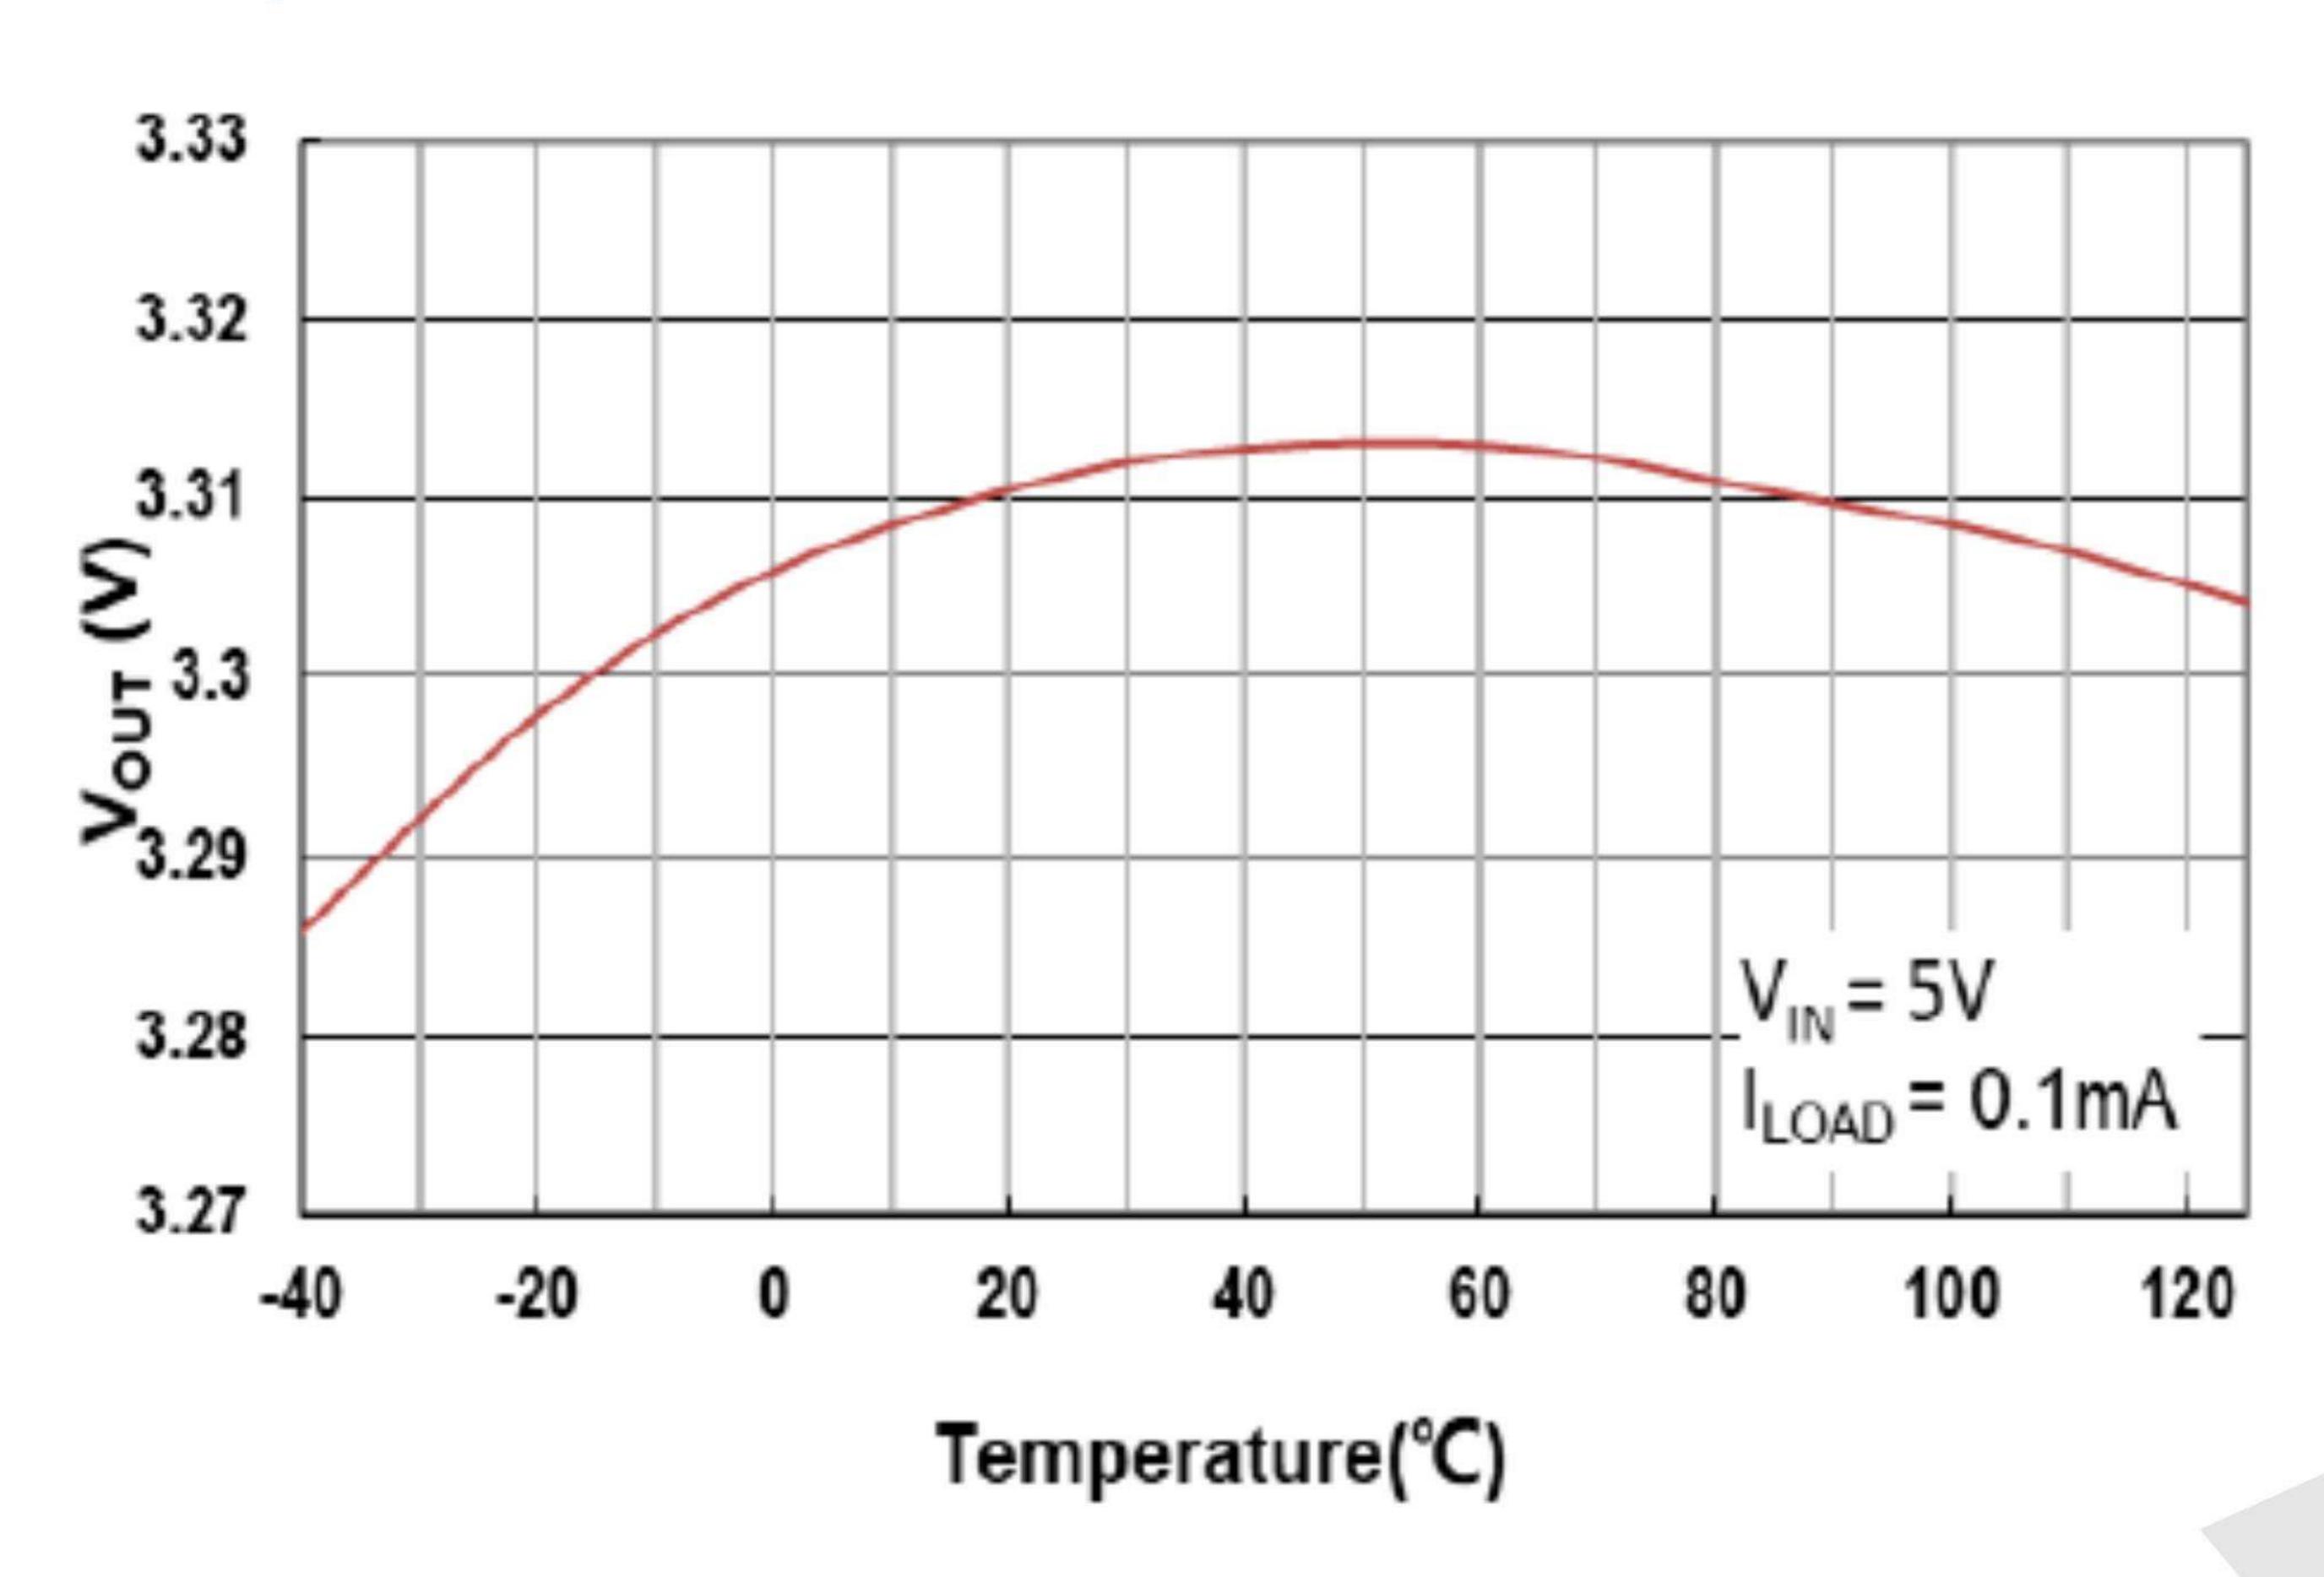


Fig. 5 Output Voltage vs. Temperature

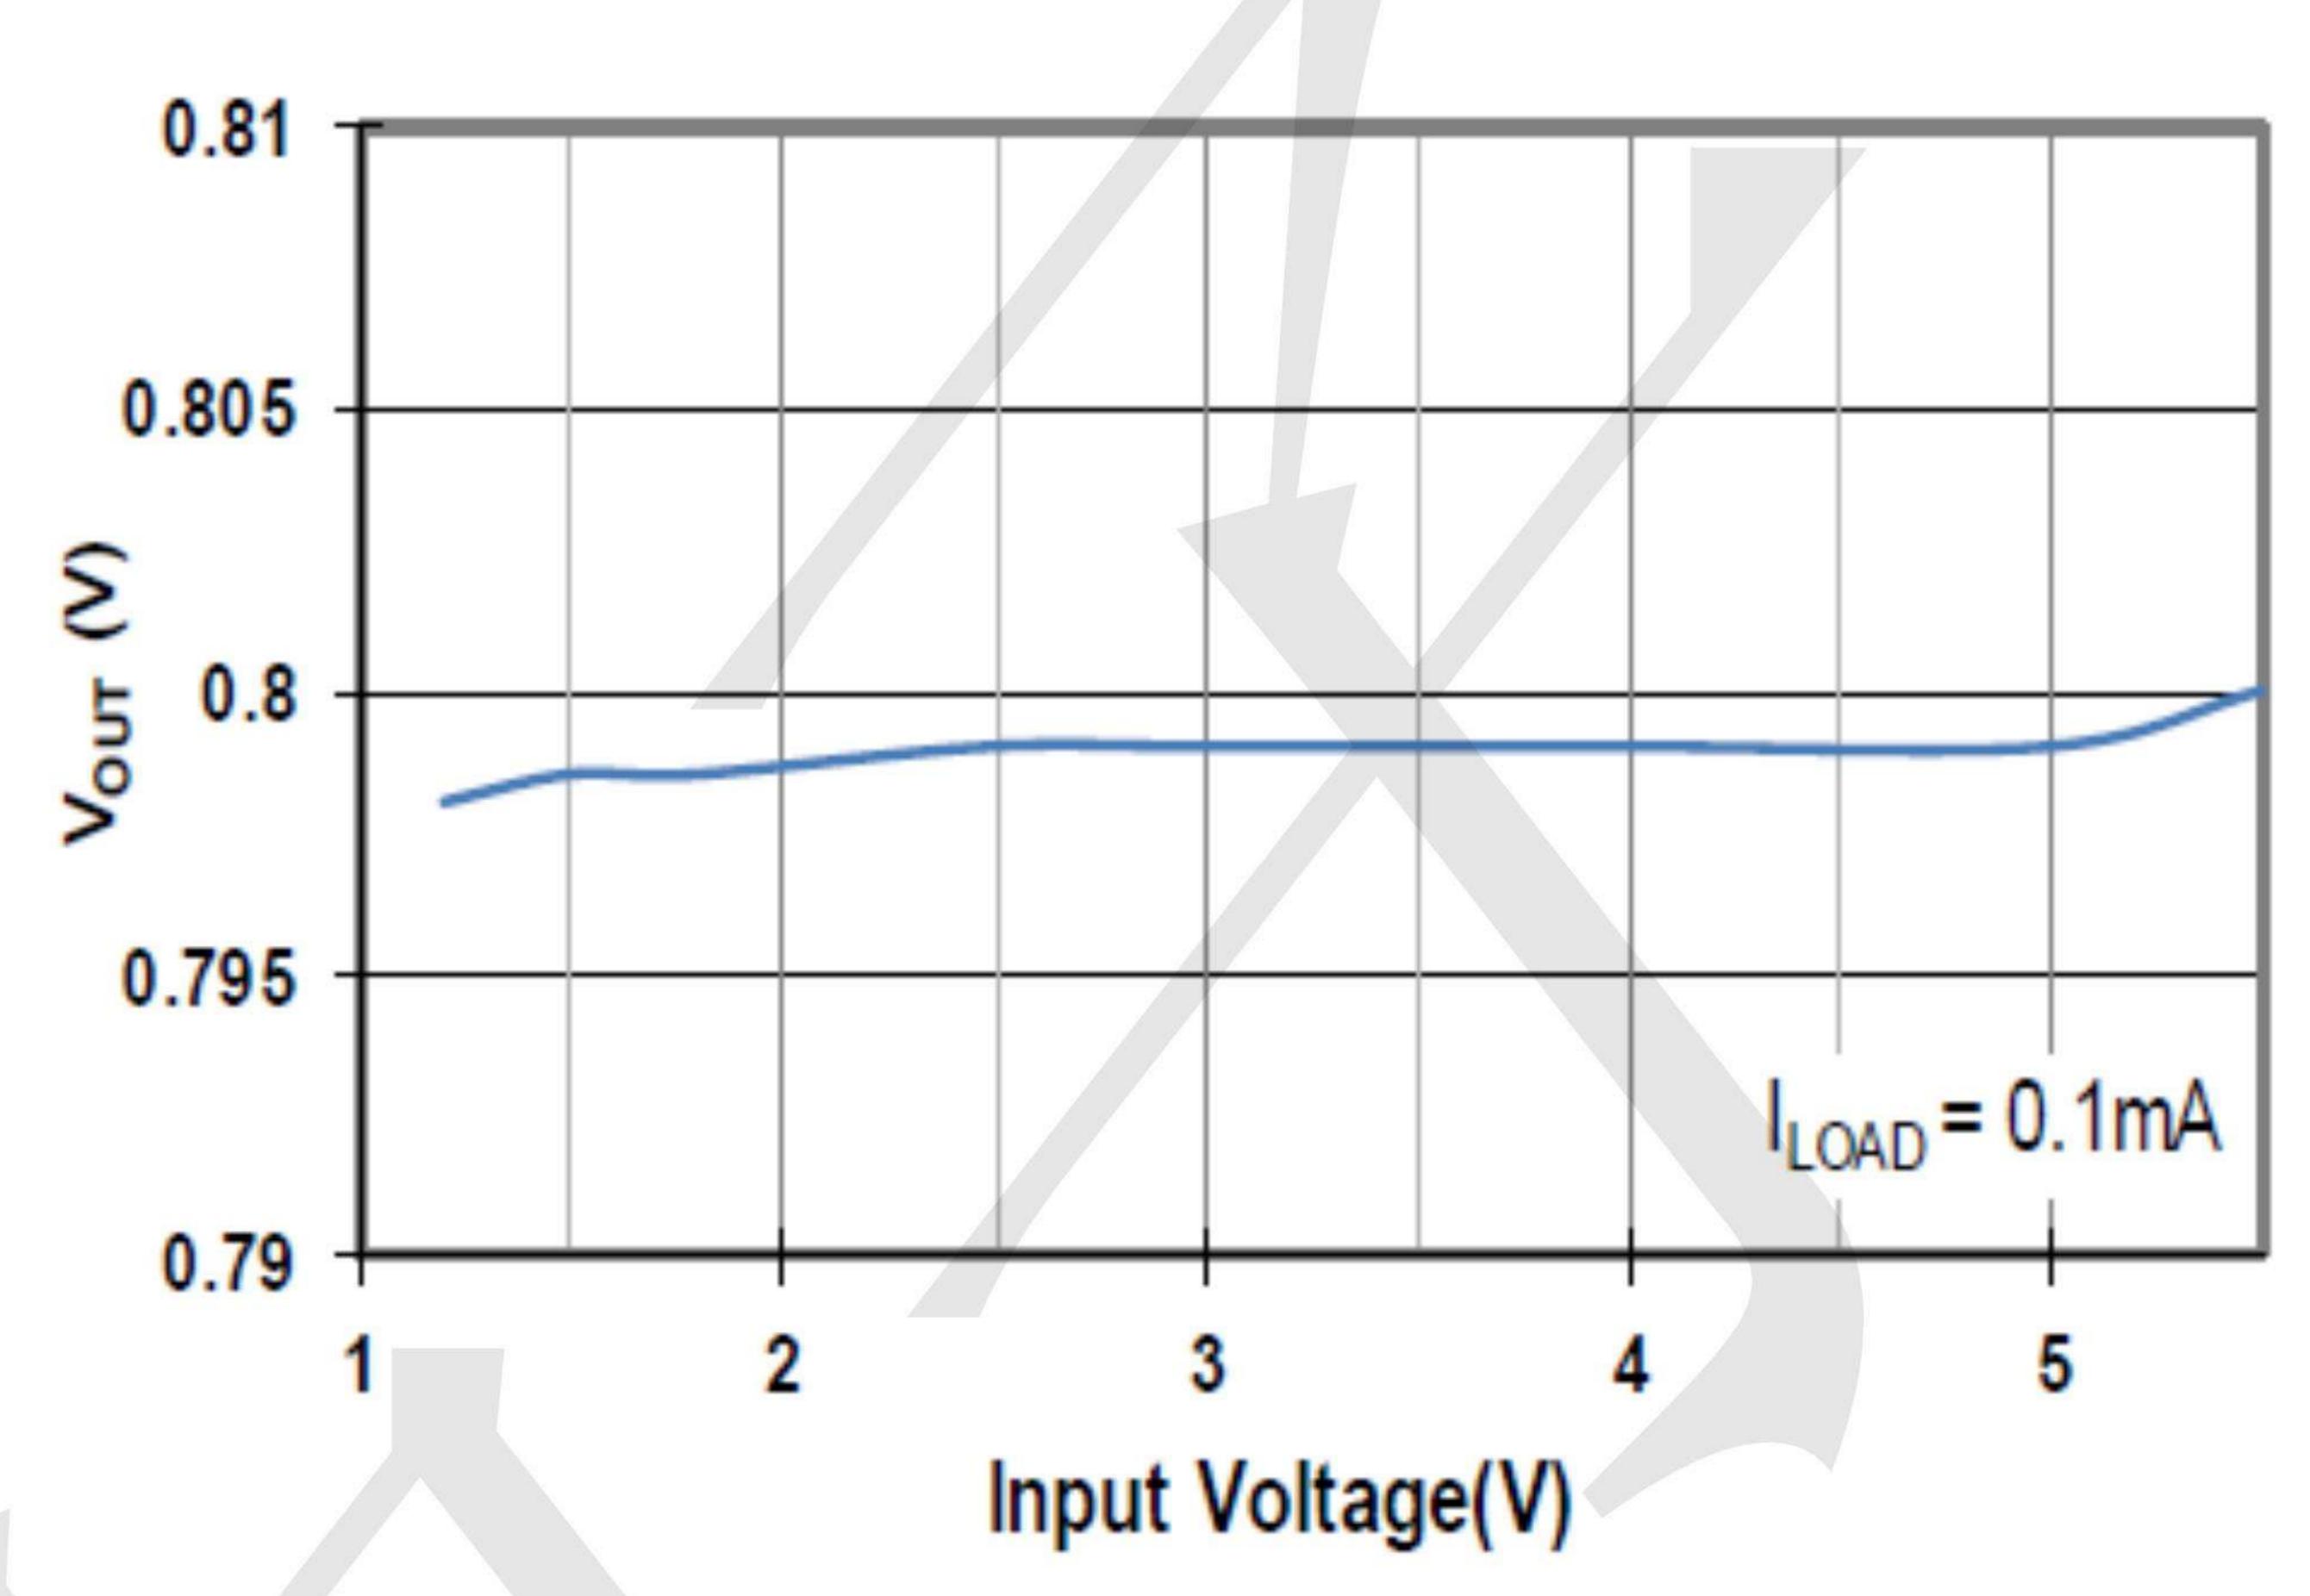


Fig. 6 Output Voltage vs. Input Voltage

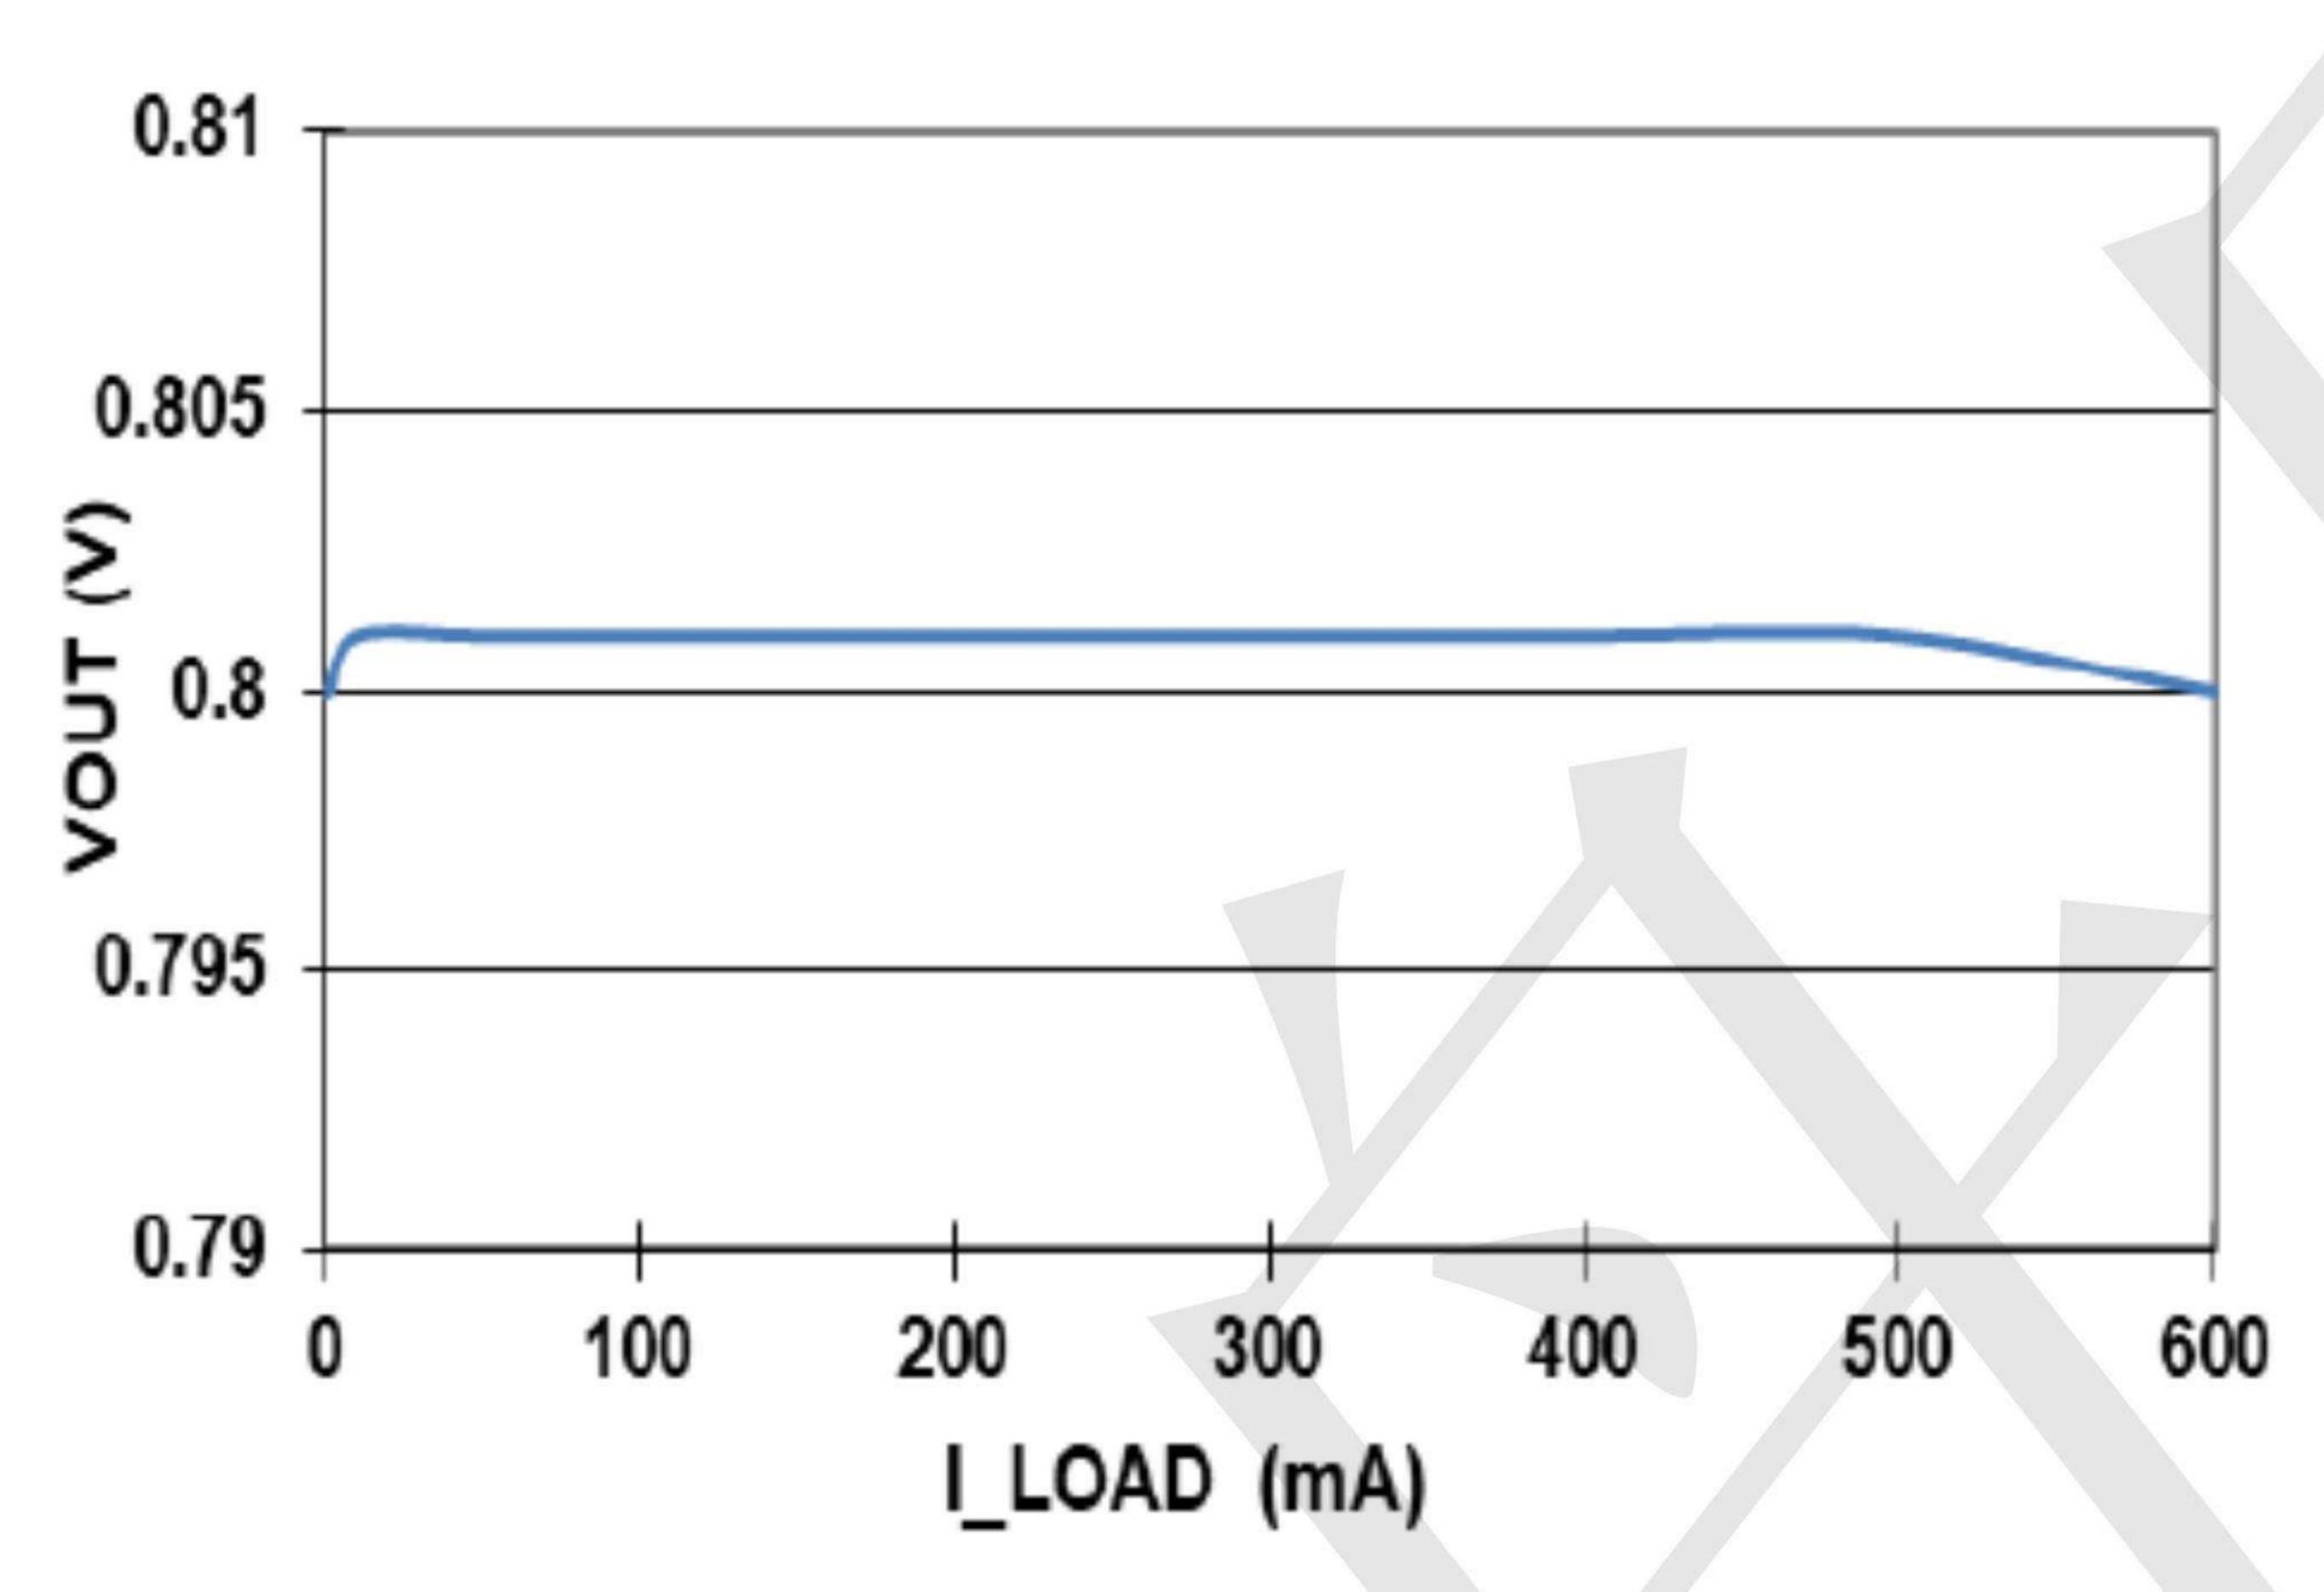


Fig. 7 Output Voltage vs. Load Current

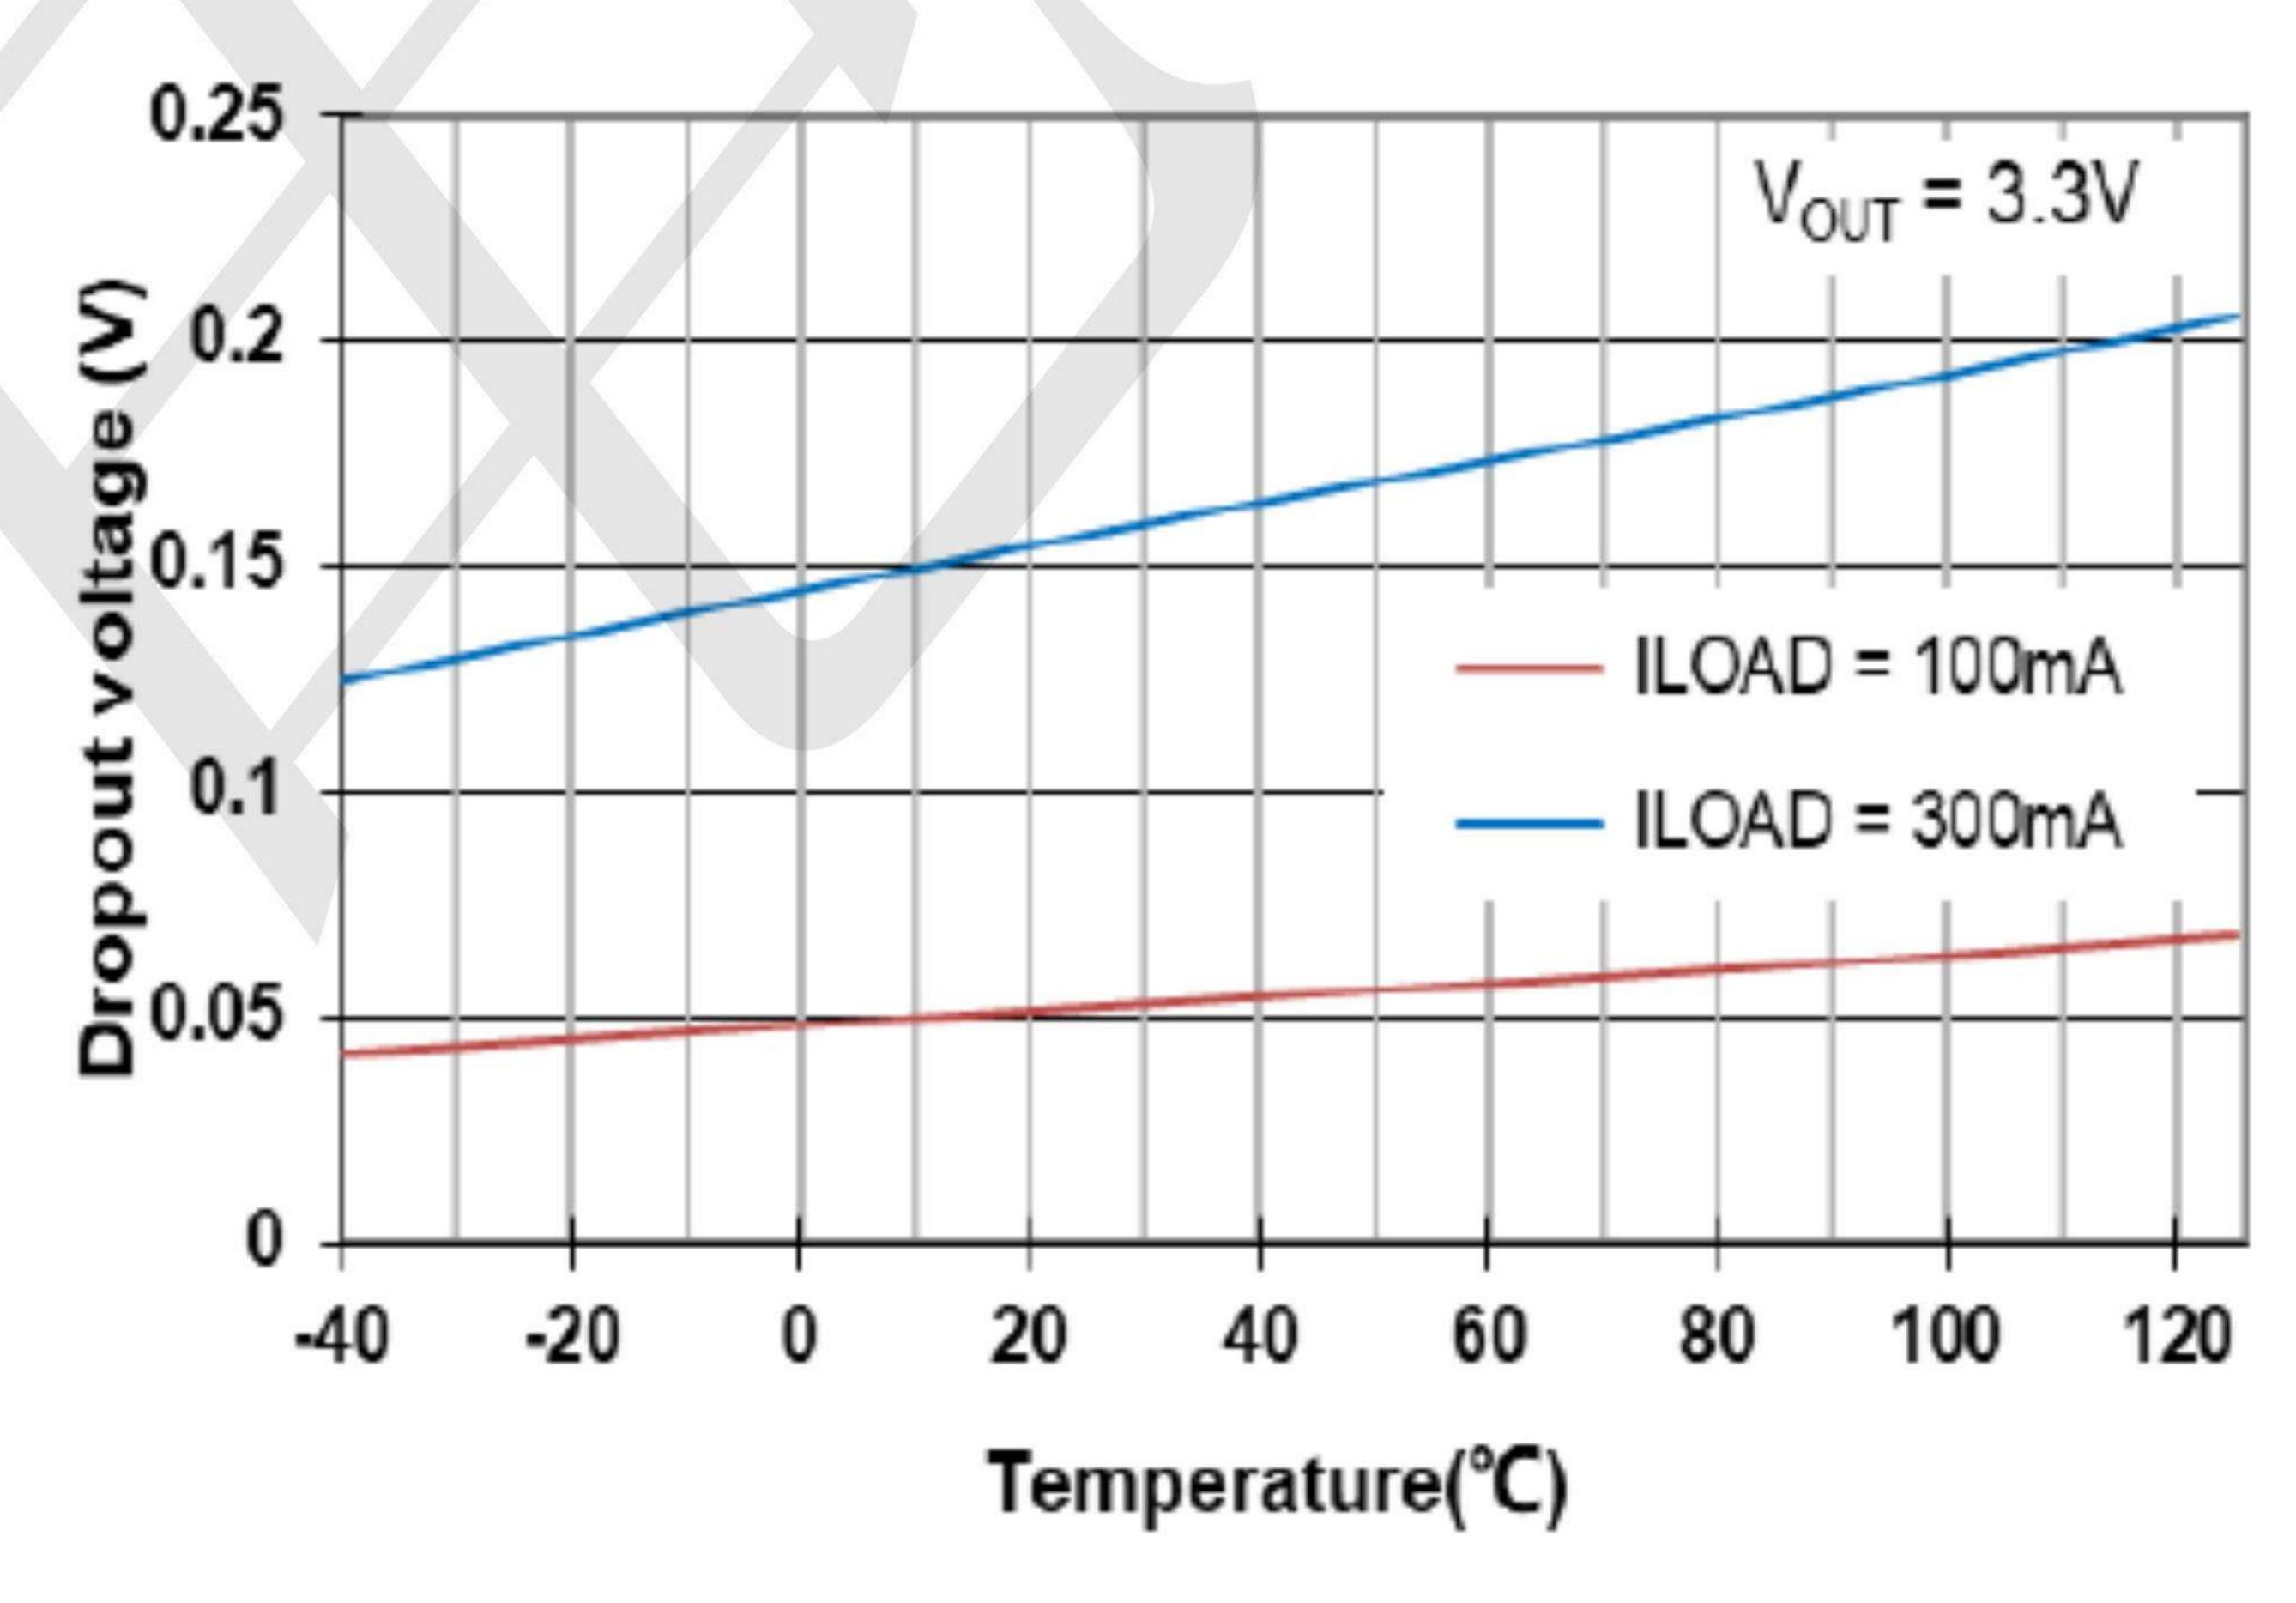


Fig. 8 Dropout Voltage vs. Temperature

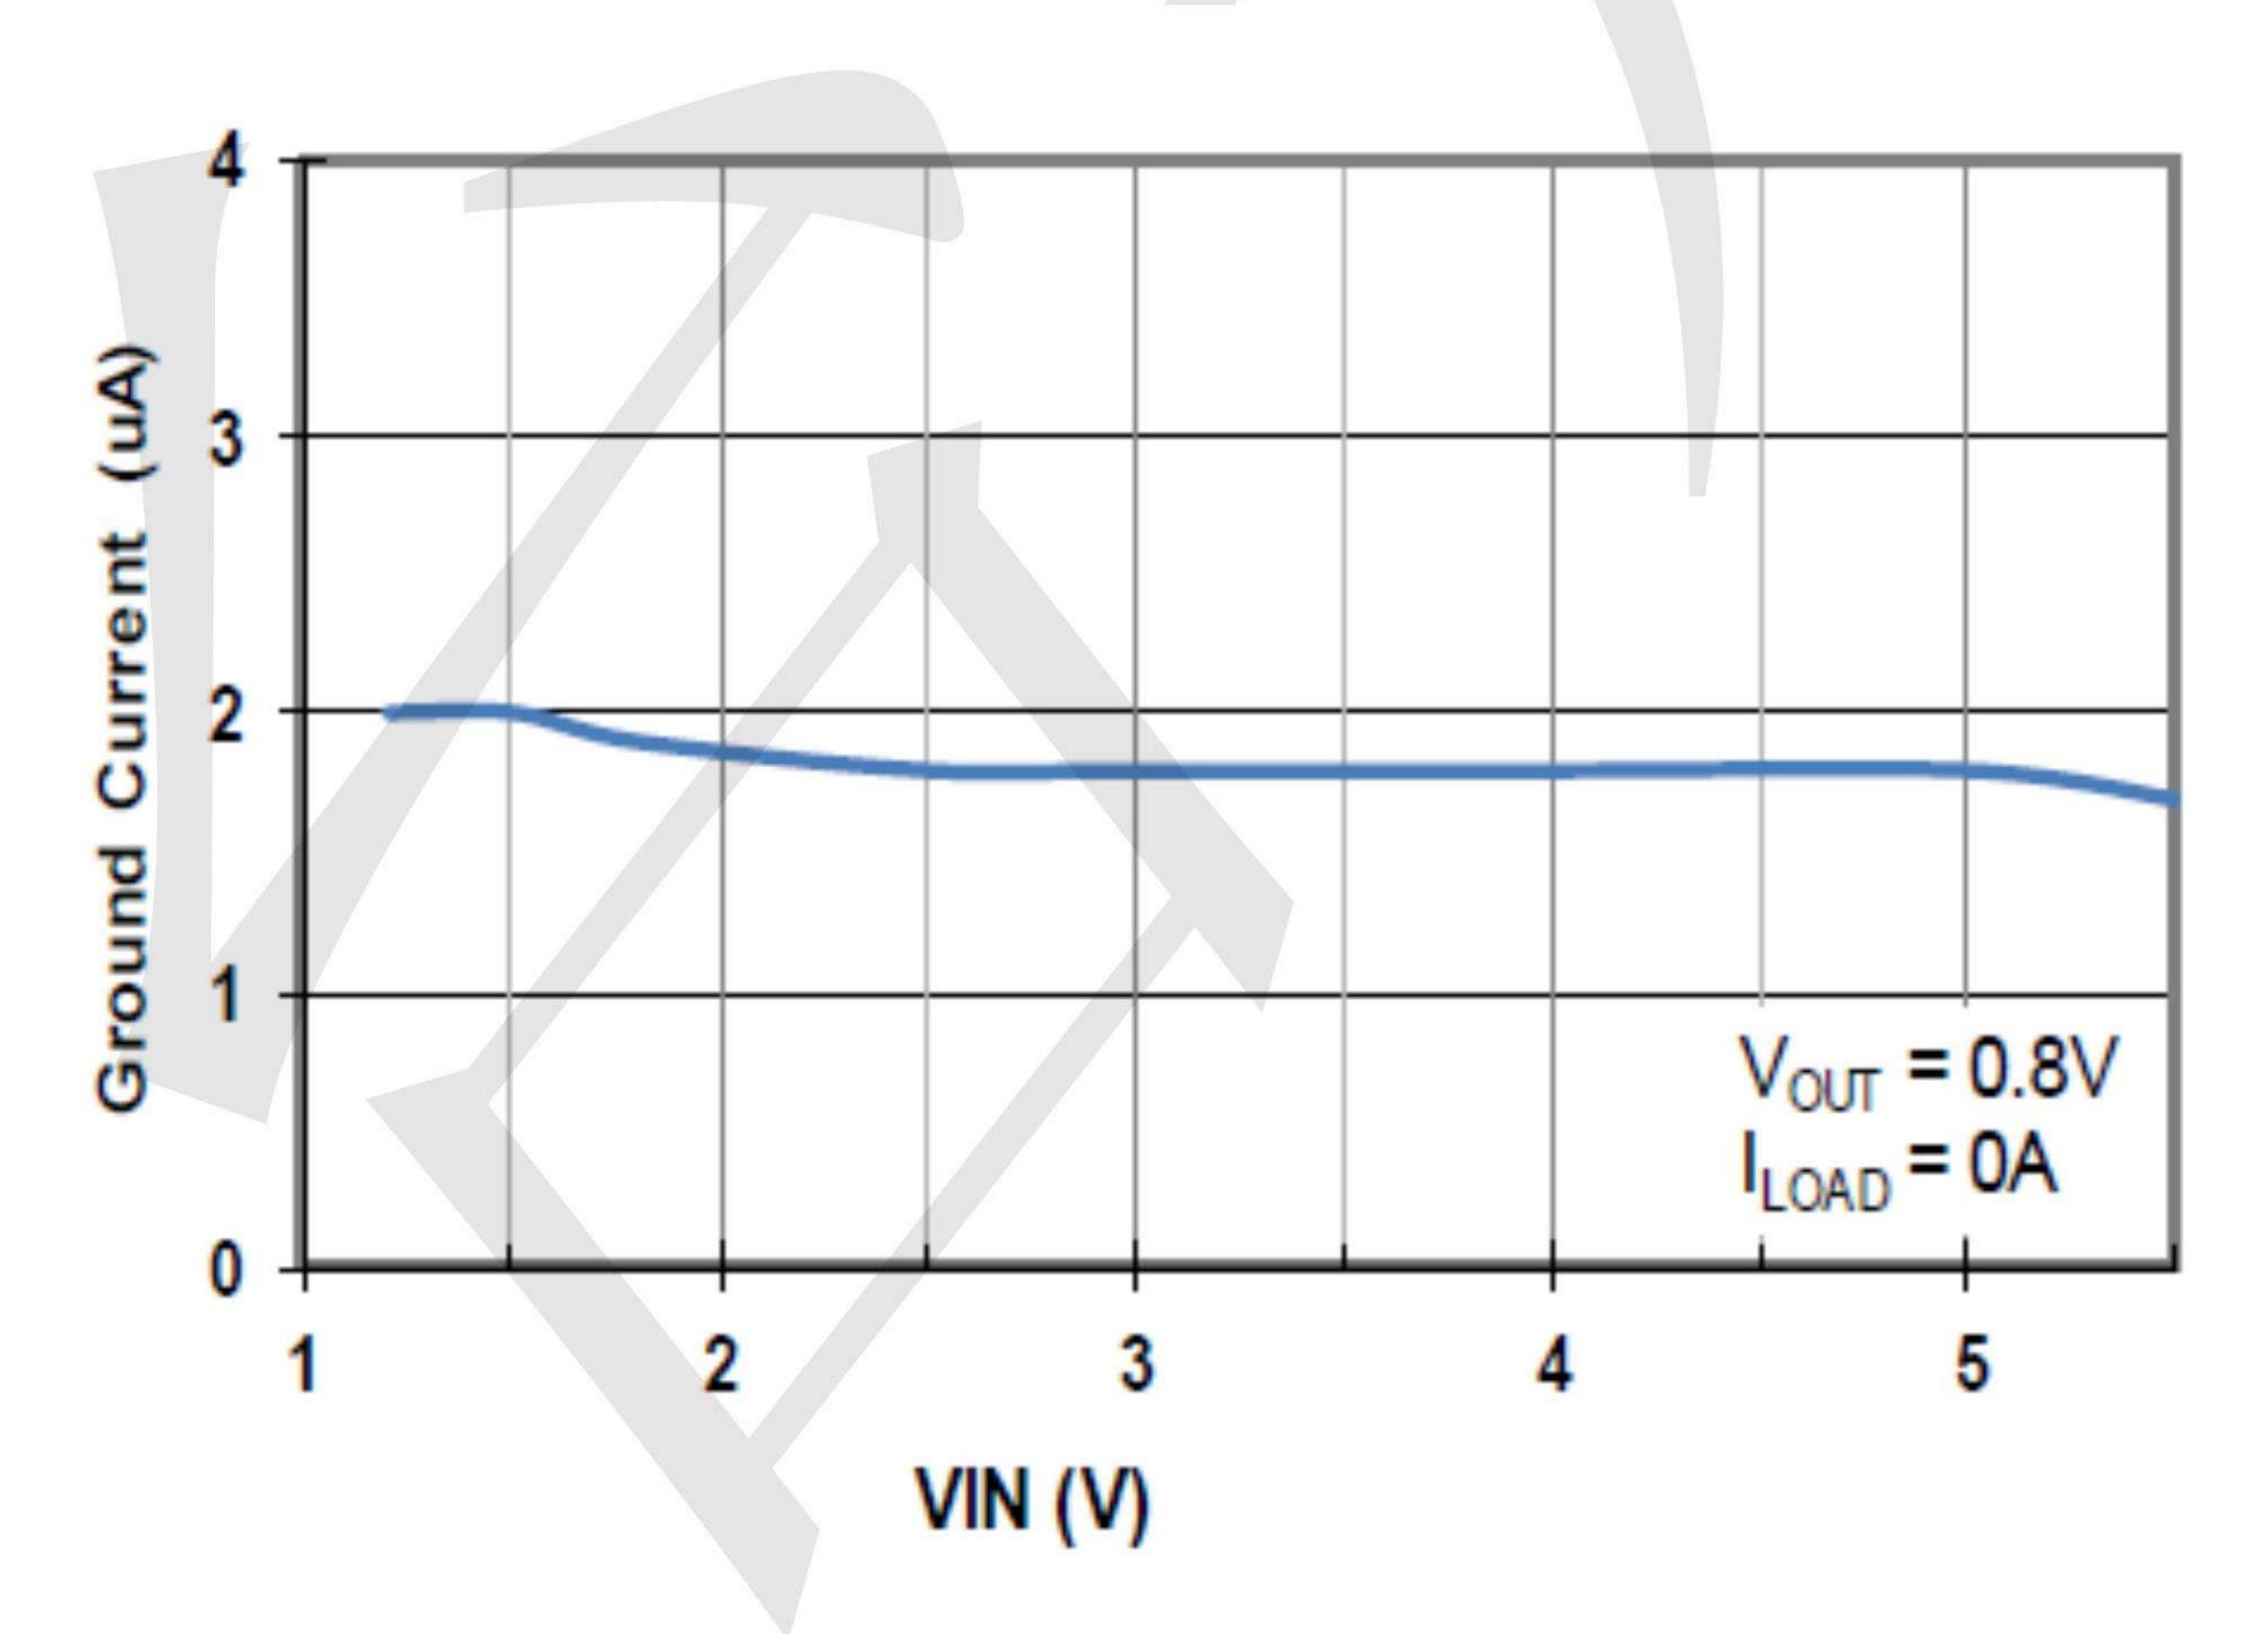


Fig. 9 Ground Current vs. Input Voltage


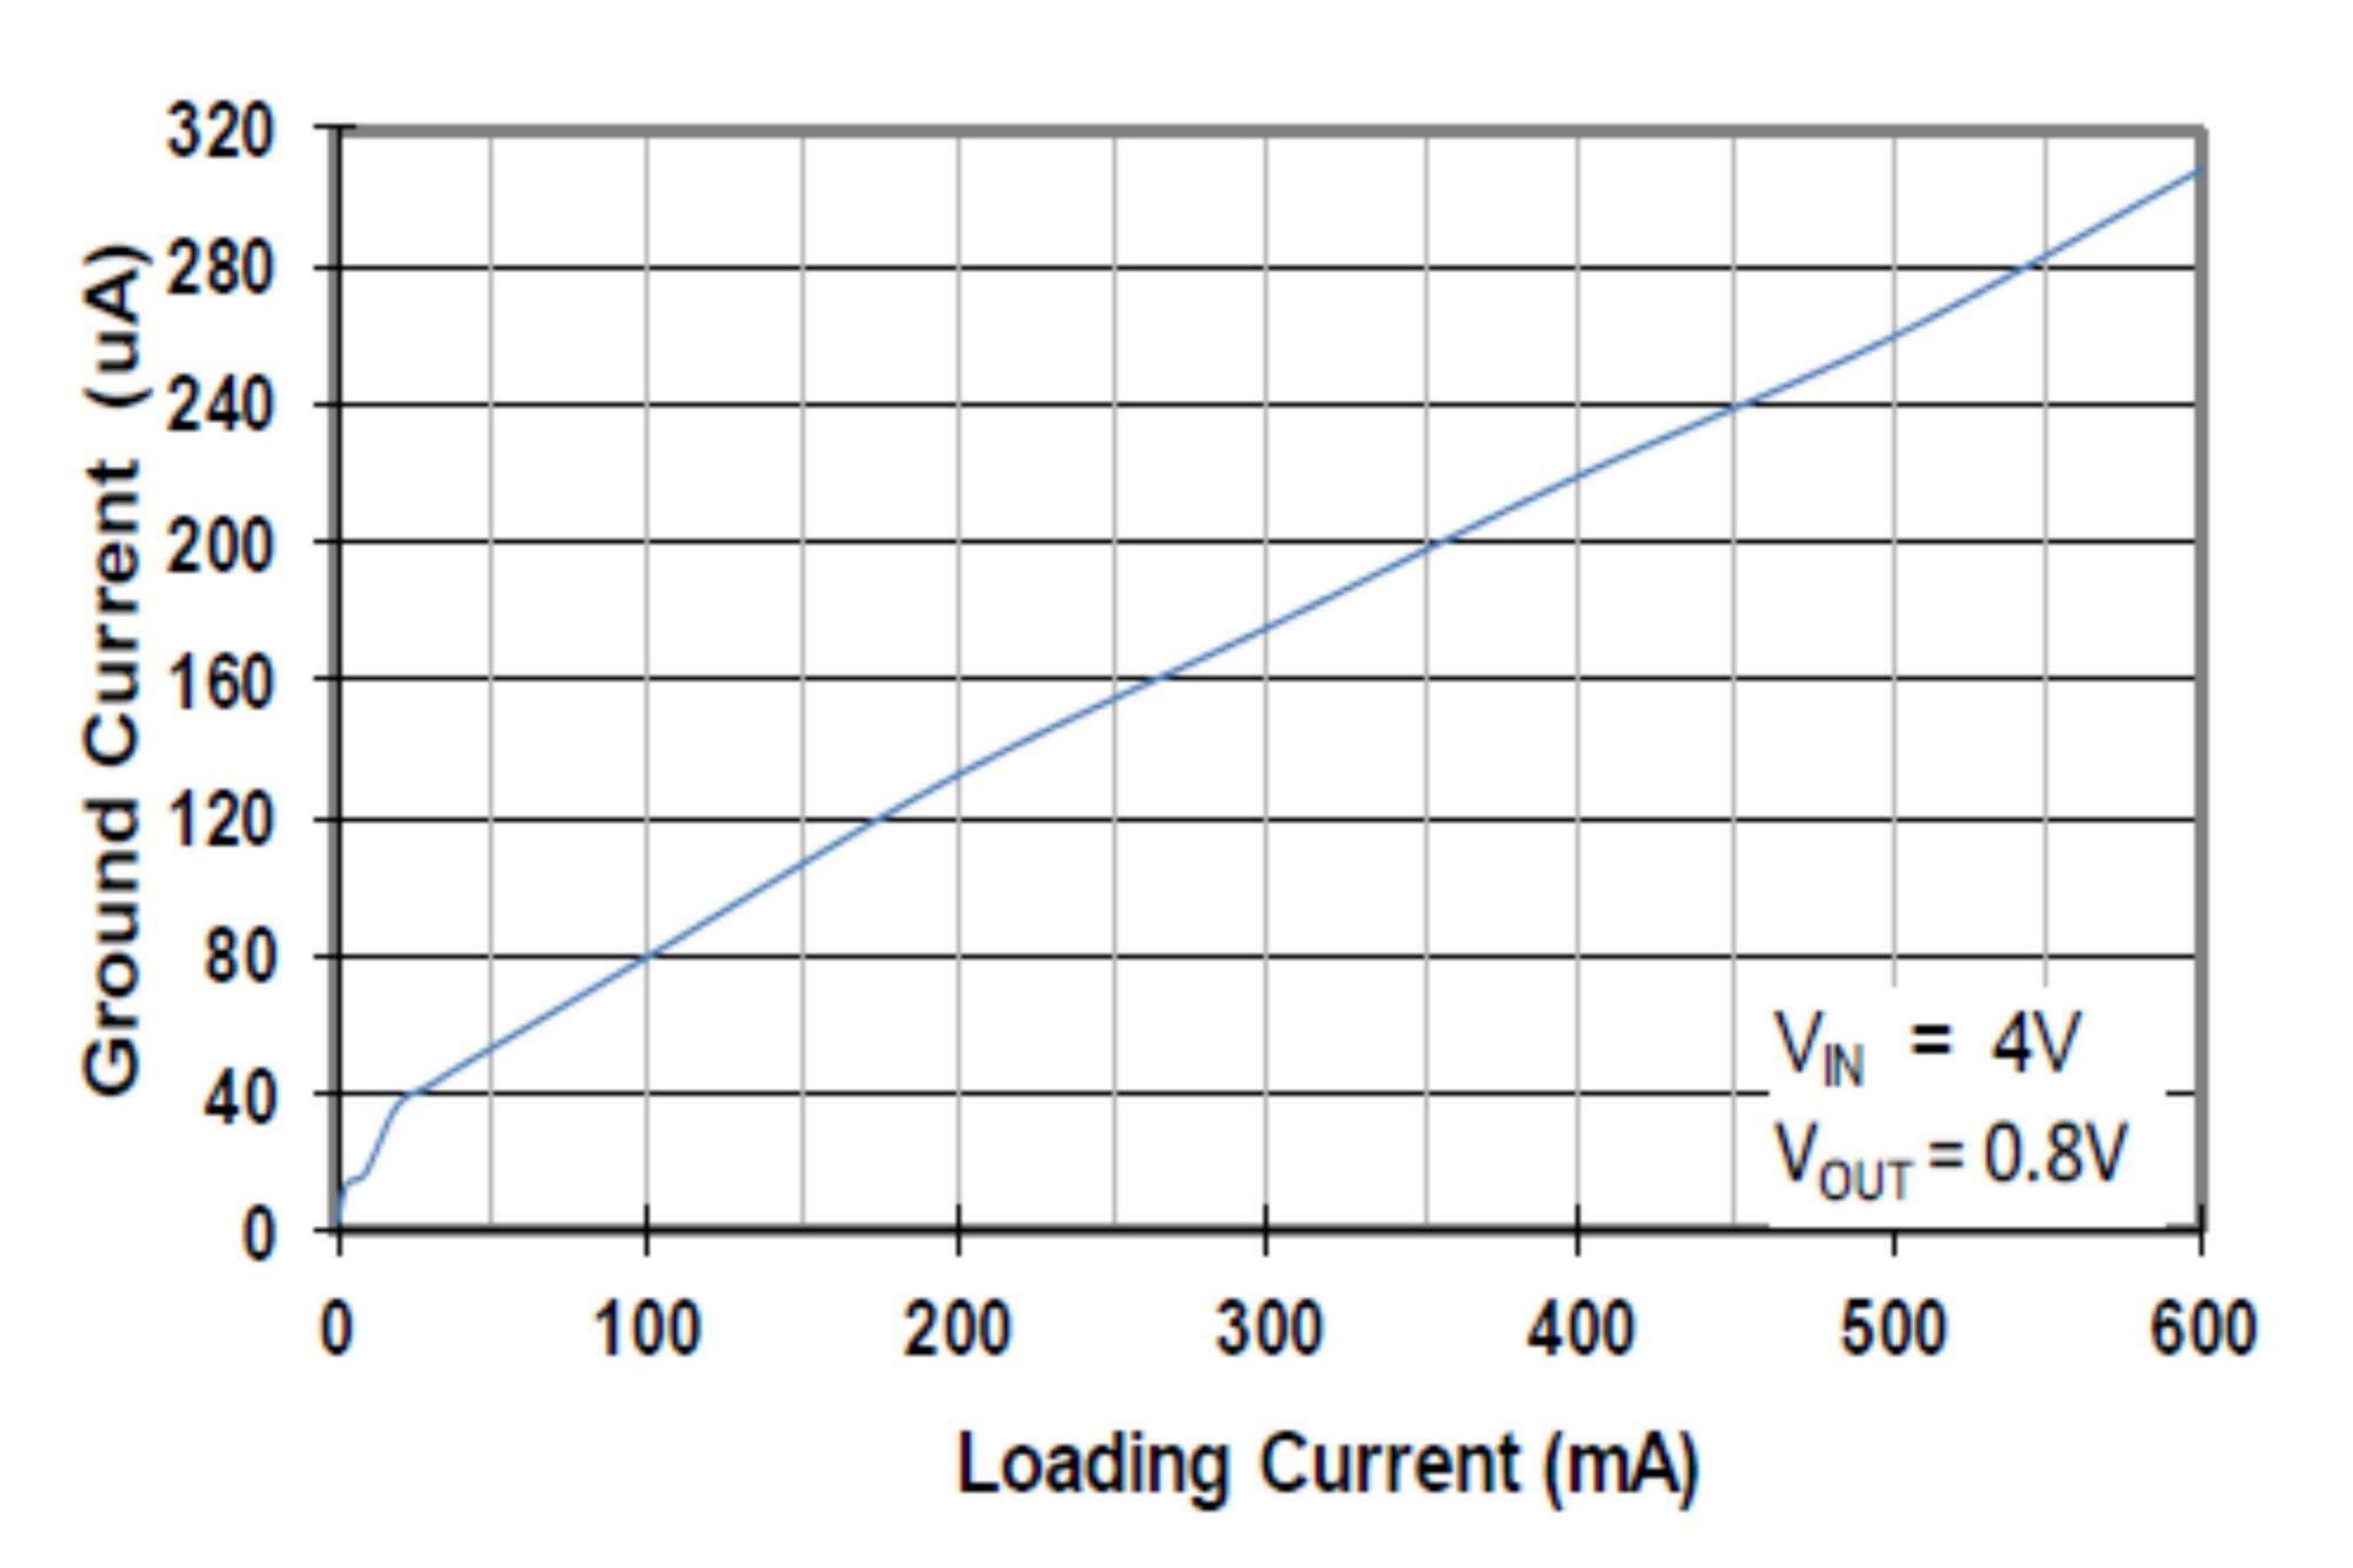



Fig. 10 Ground Current vs. Loading Current




500mA,5uA, Higt PSRR Voltage Reaulators

www.sot23.com.tw

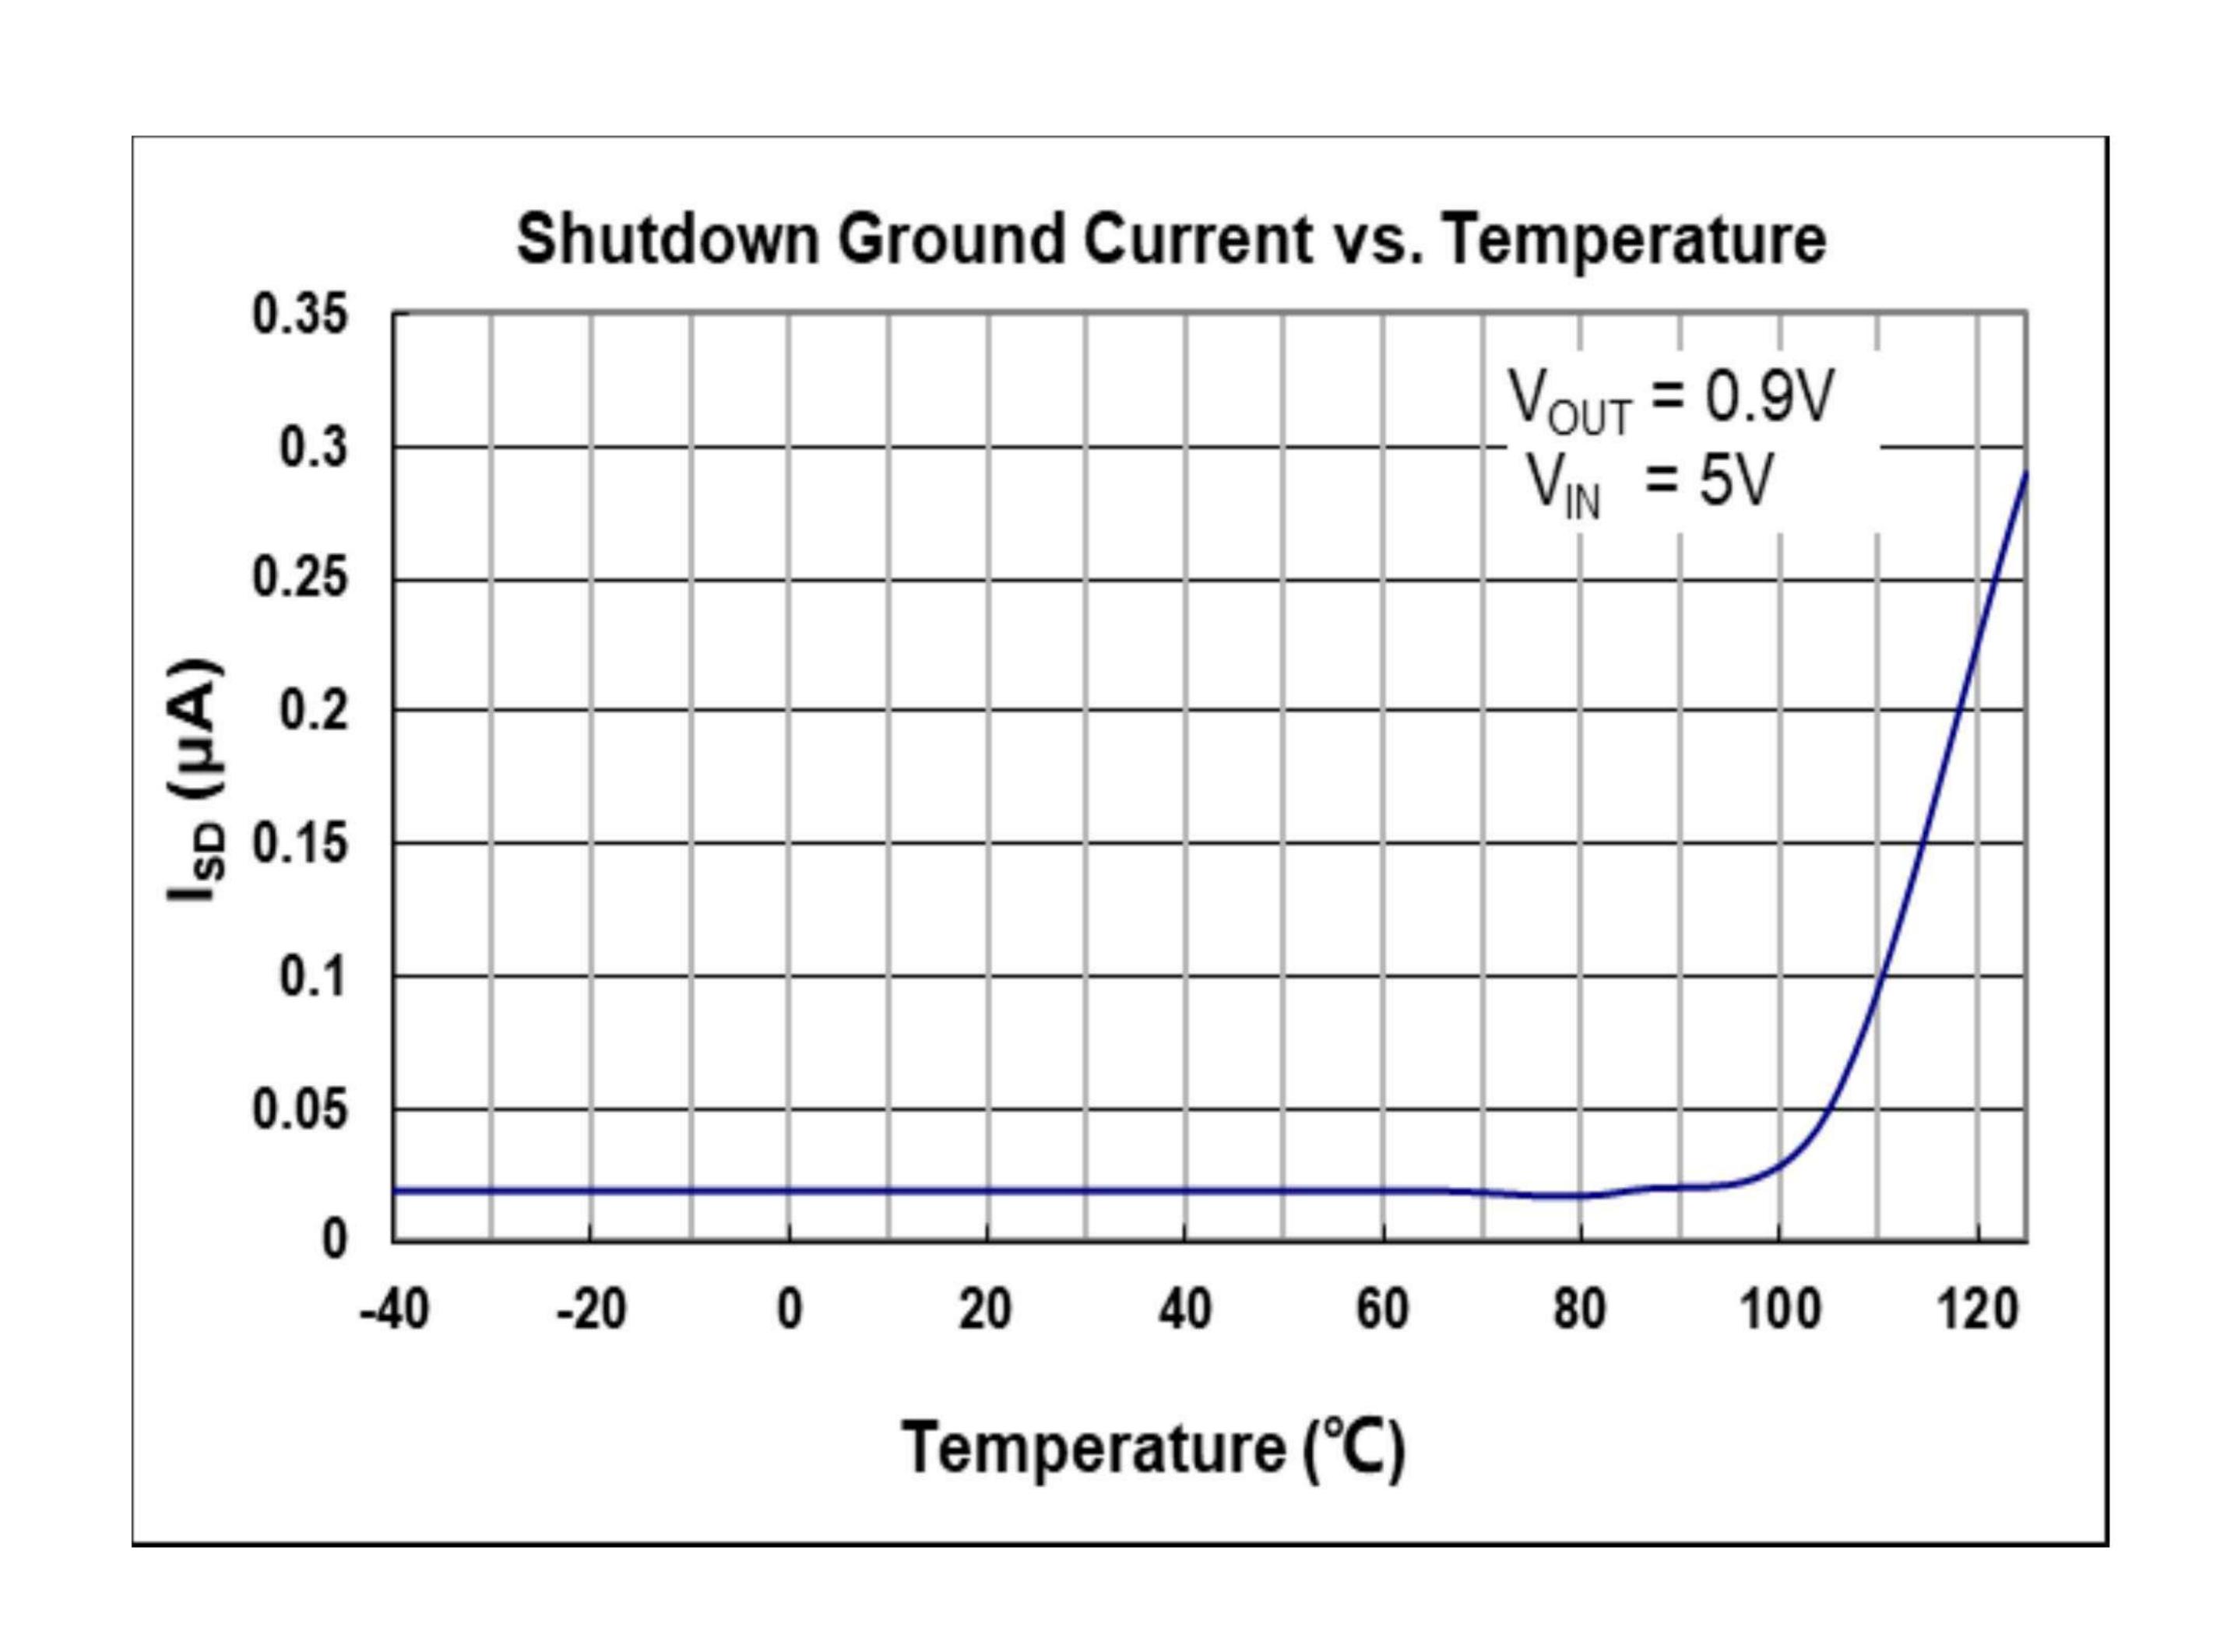


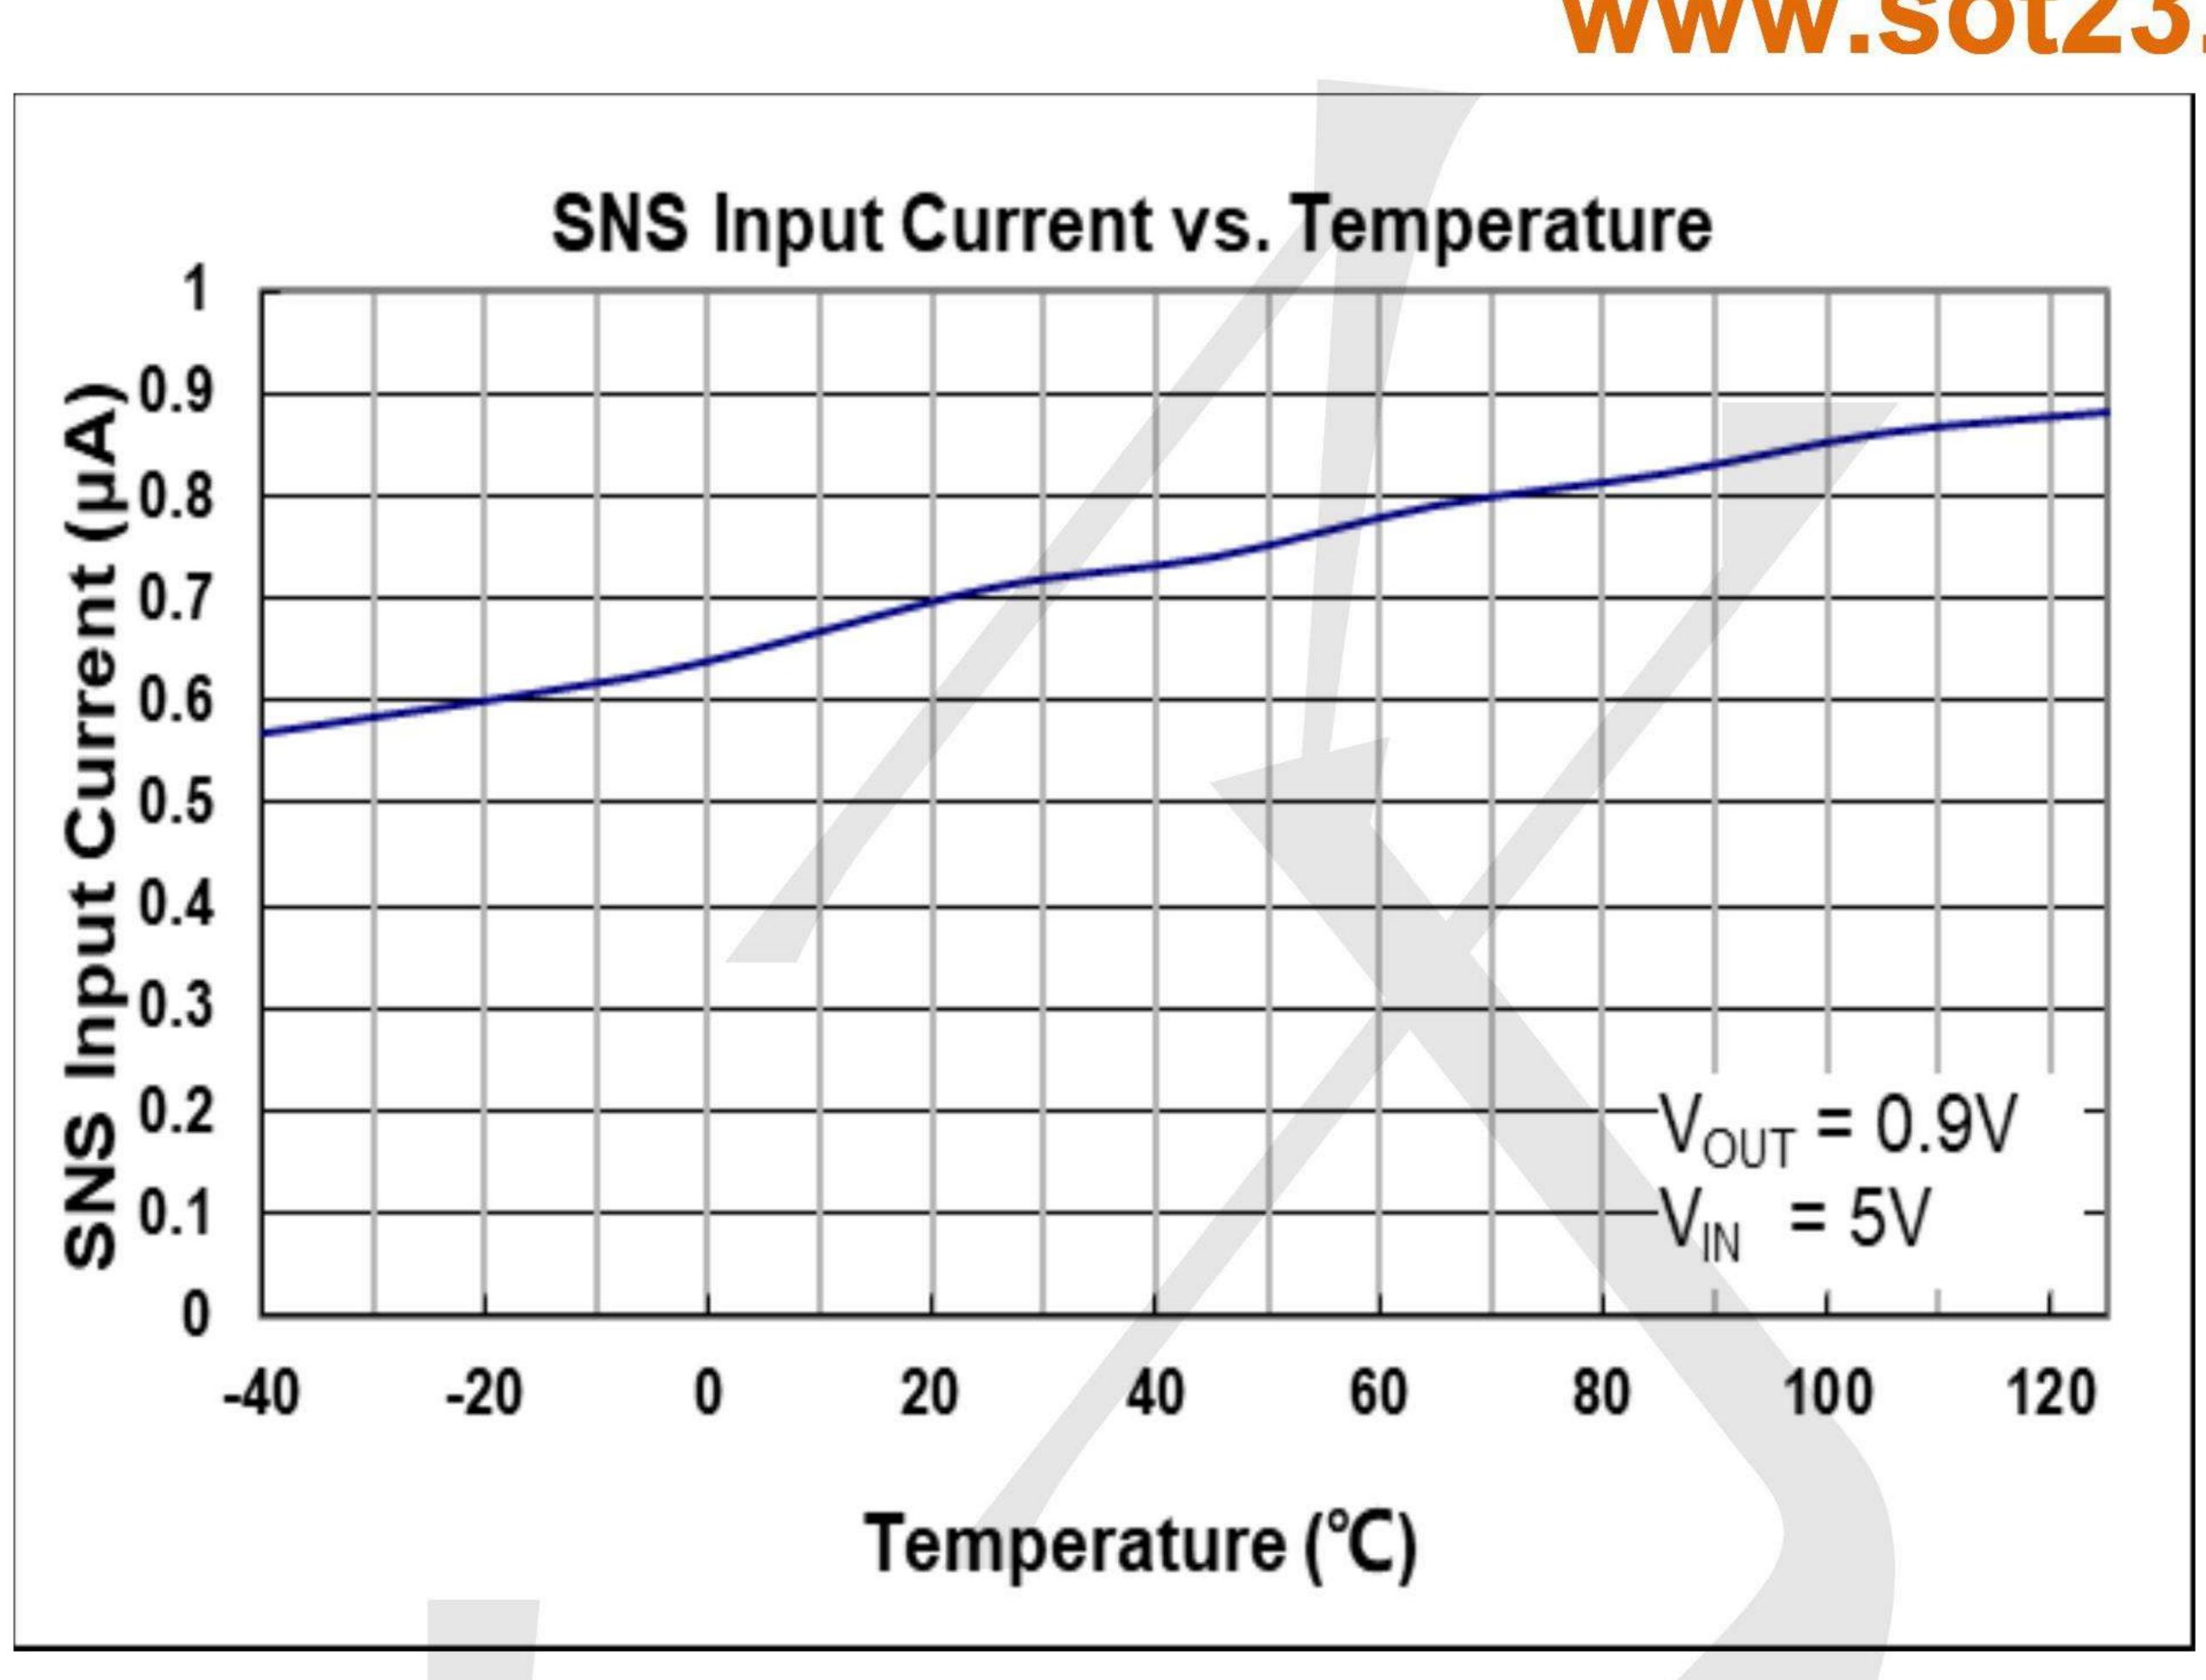


Current Limit vs. Input voltage 1300 (Time Property of Short to GND) 1000

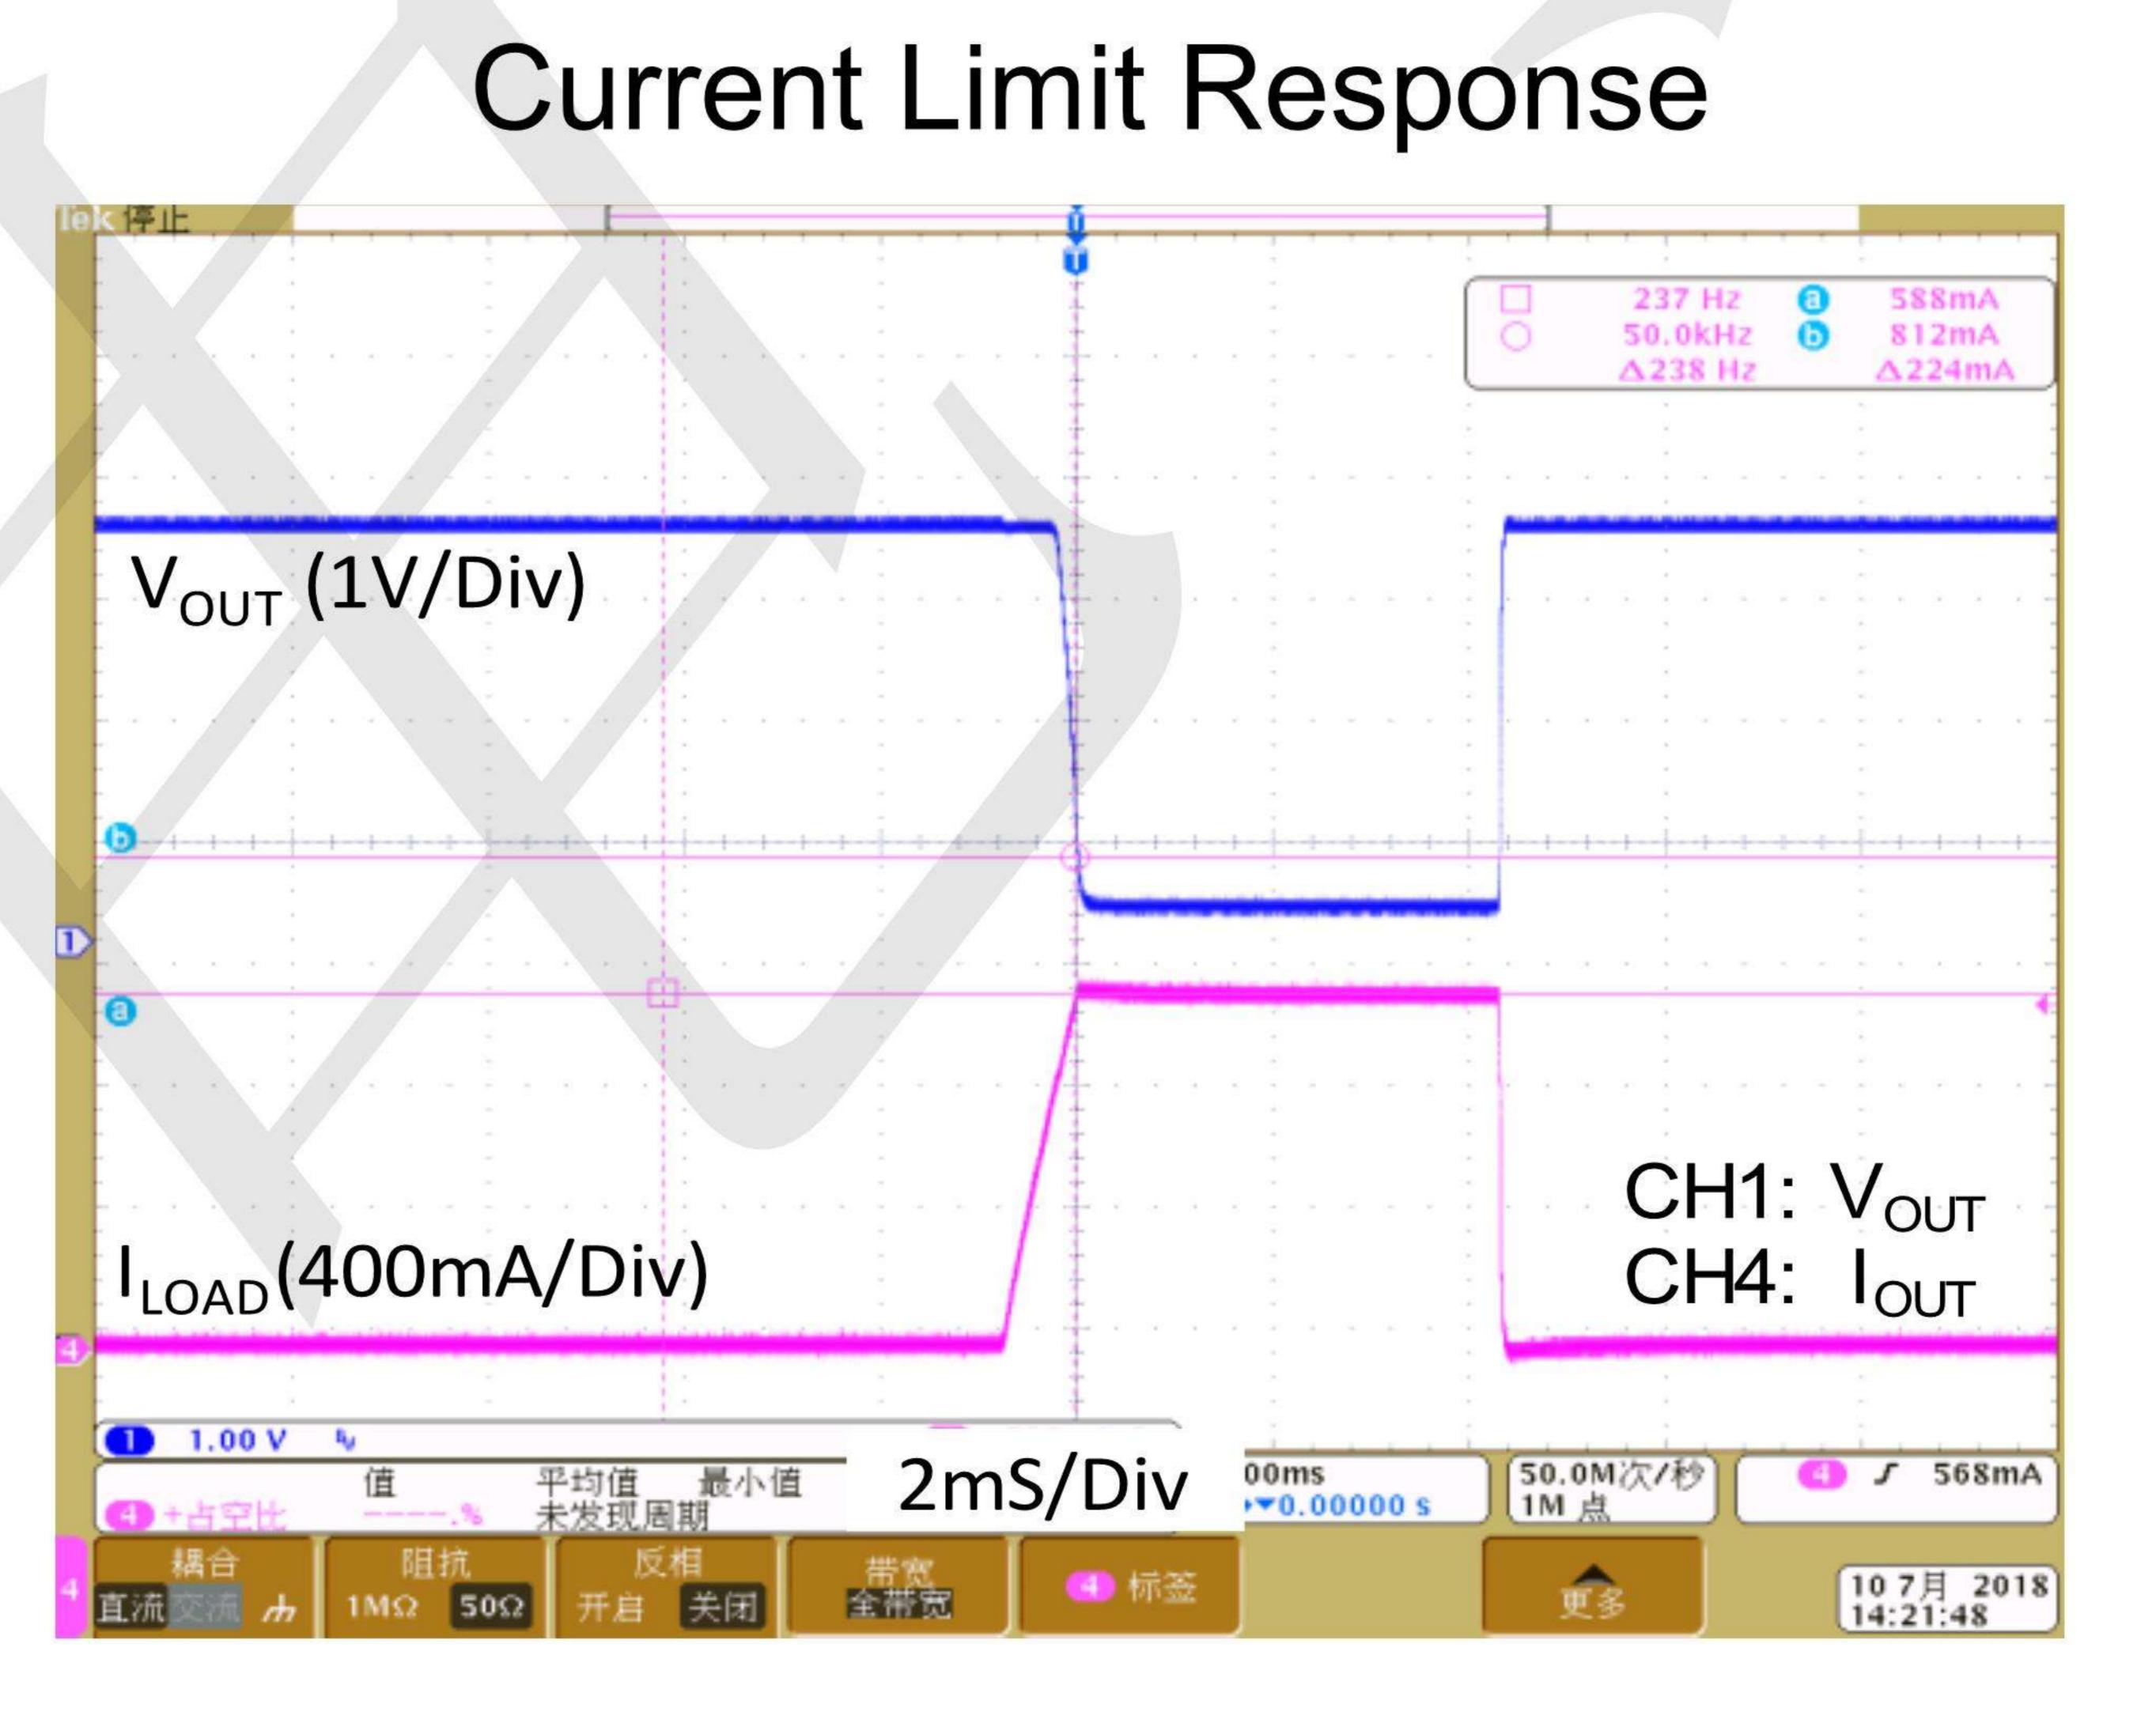

Load Transient Response I

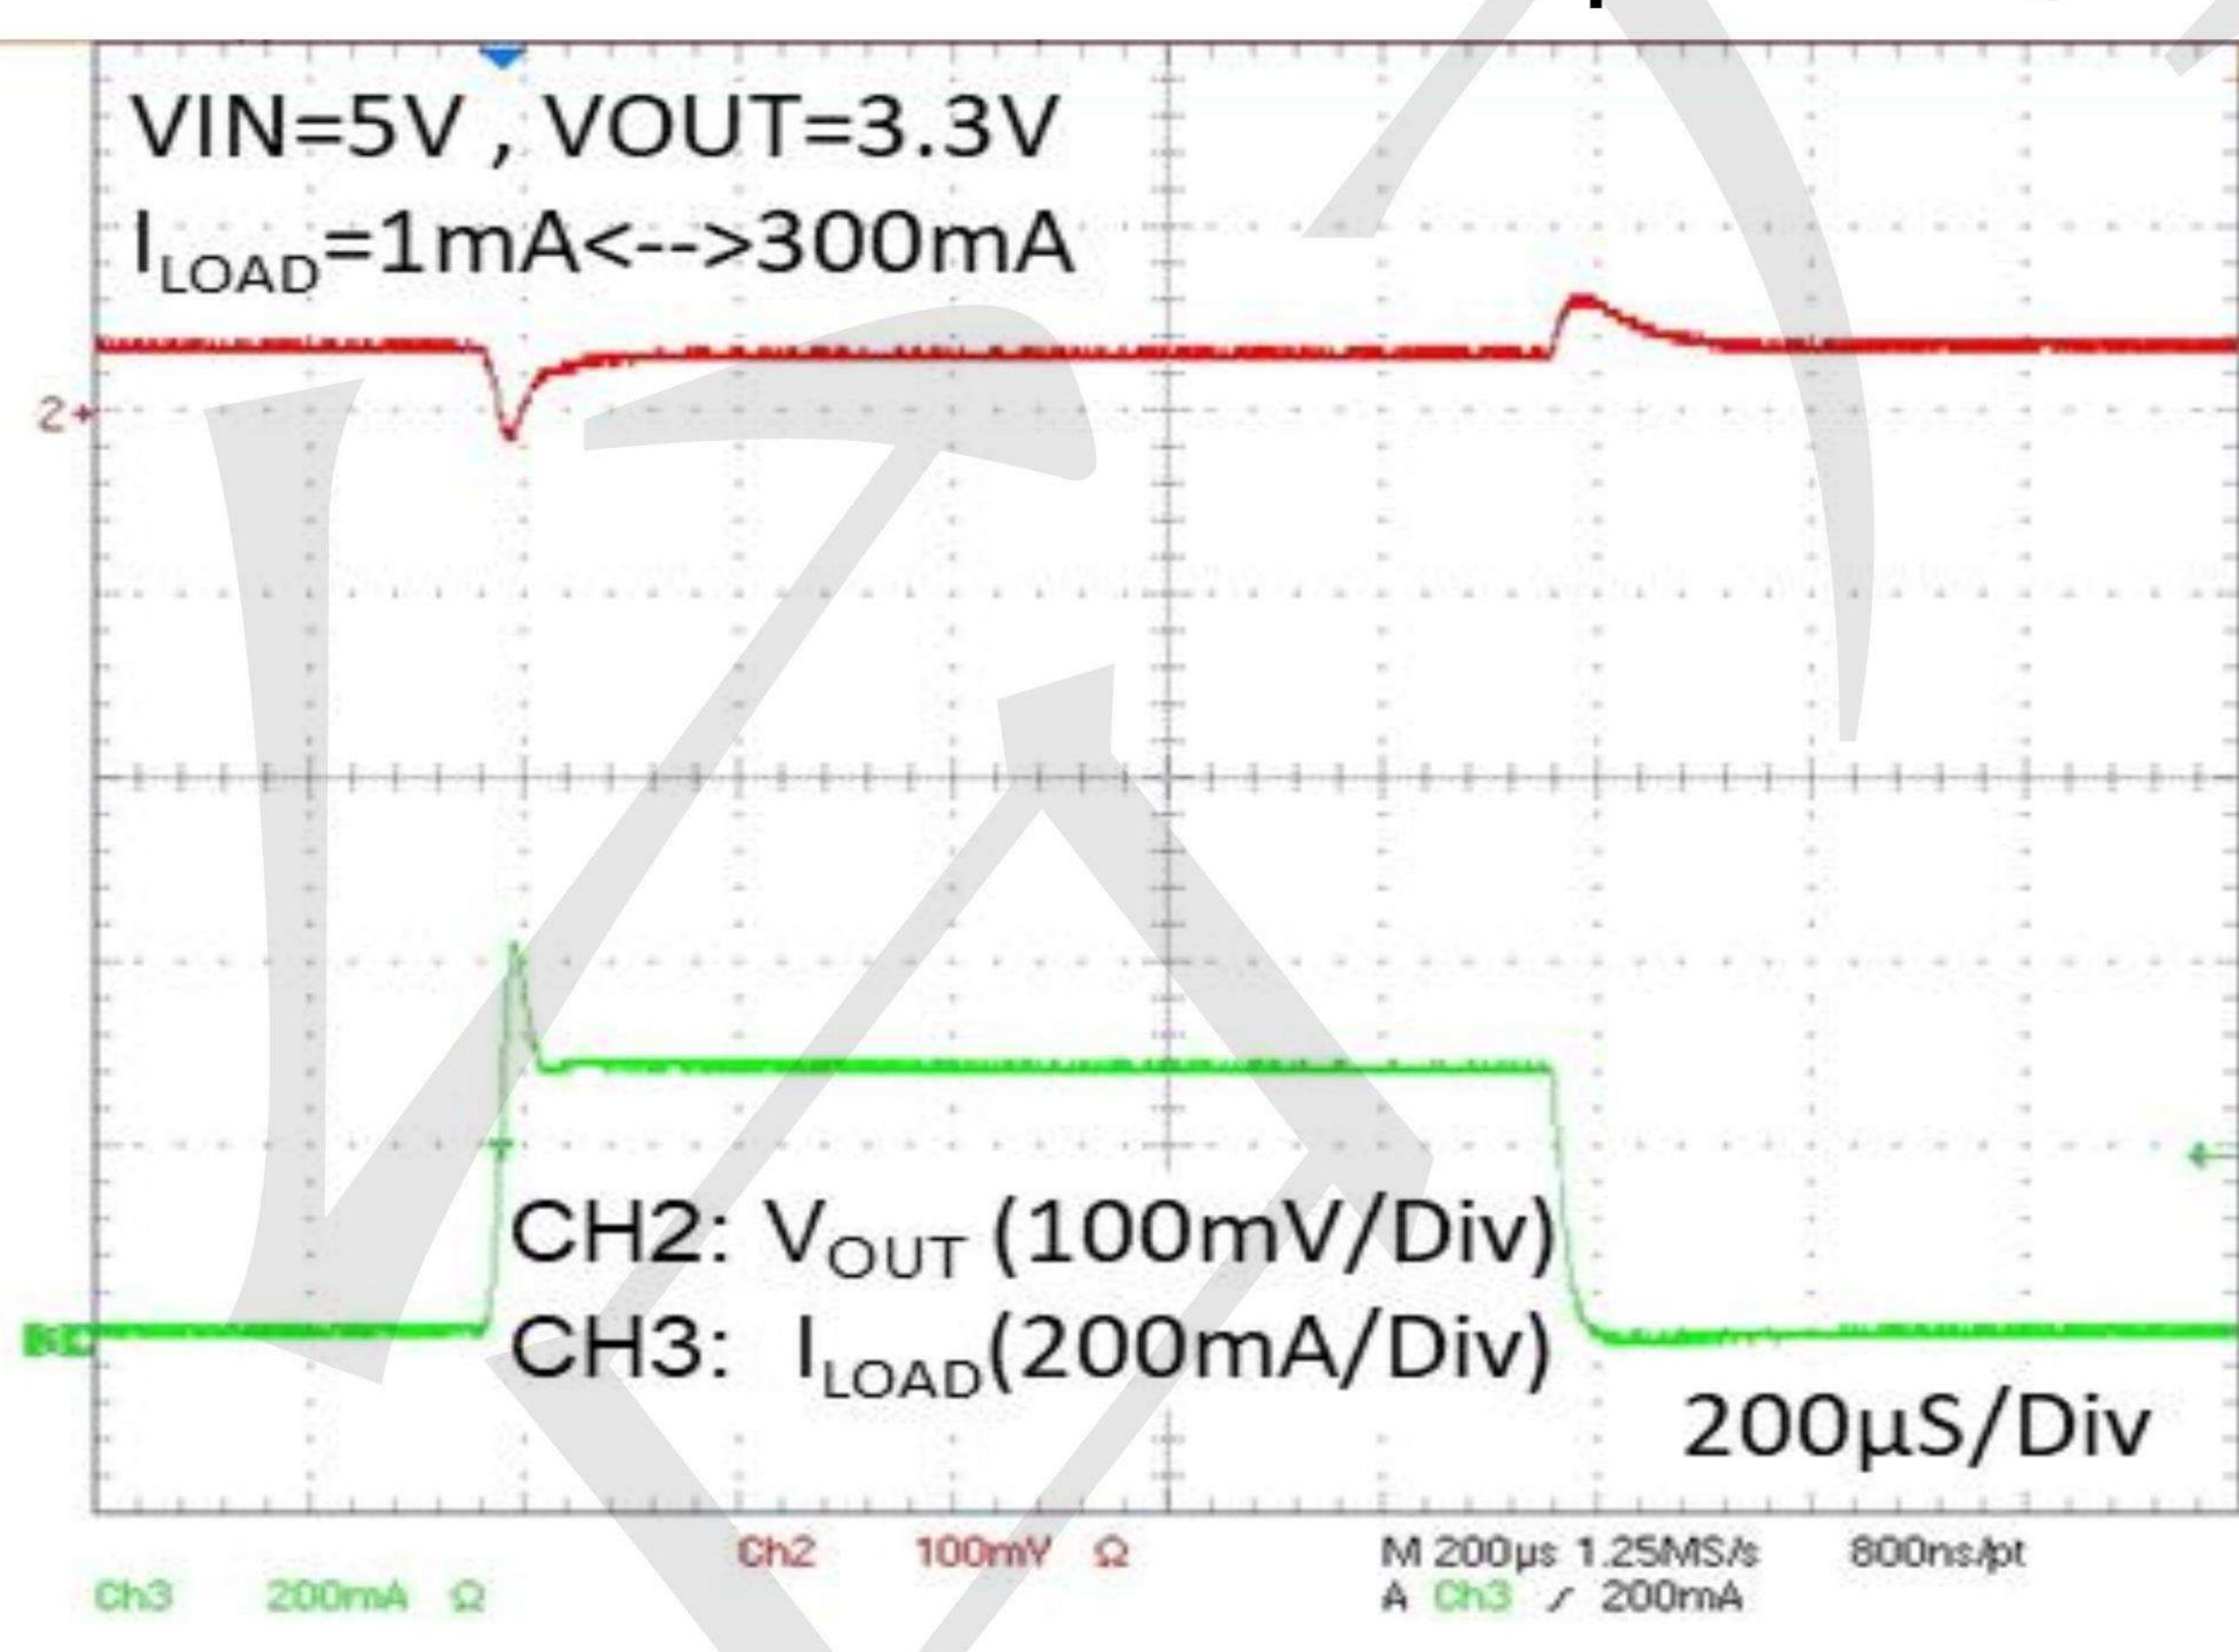

Load Transient Response II

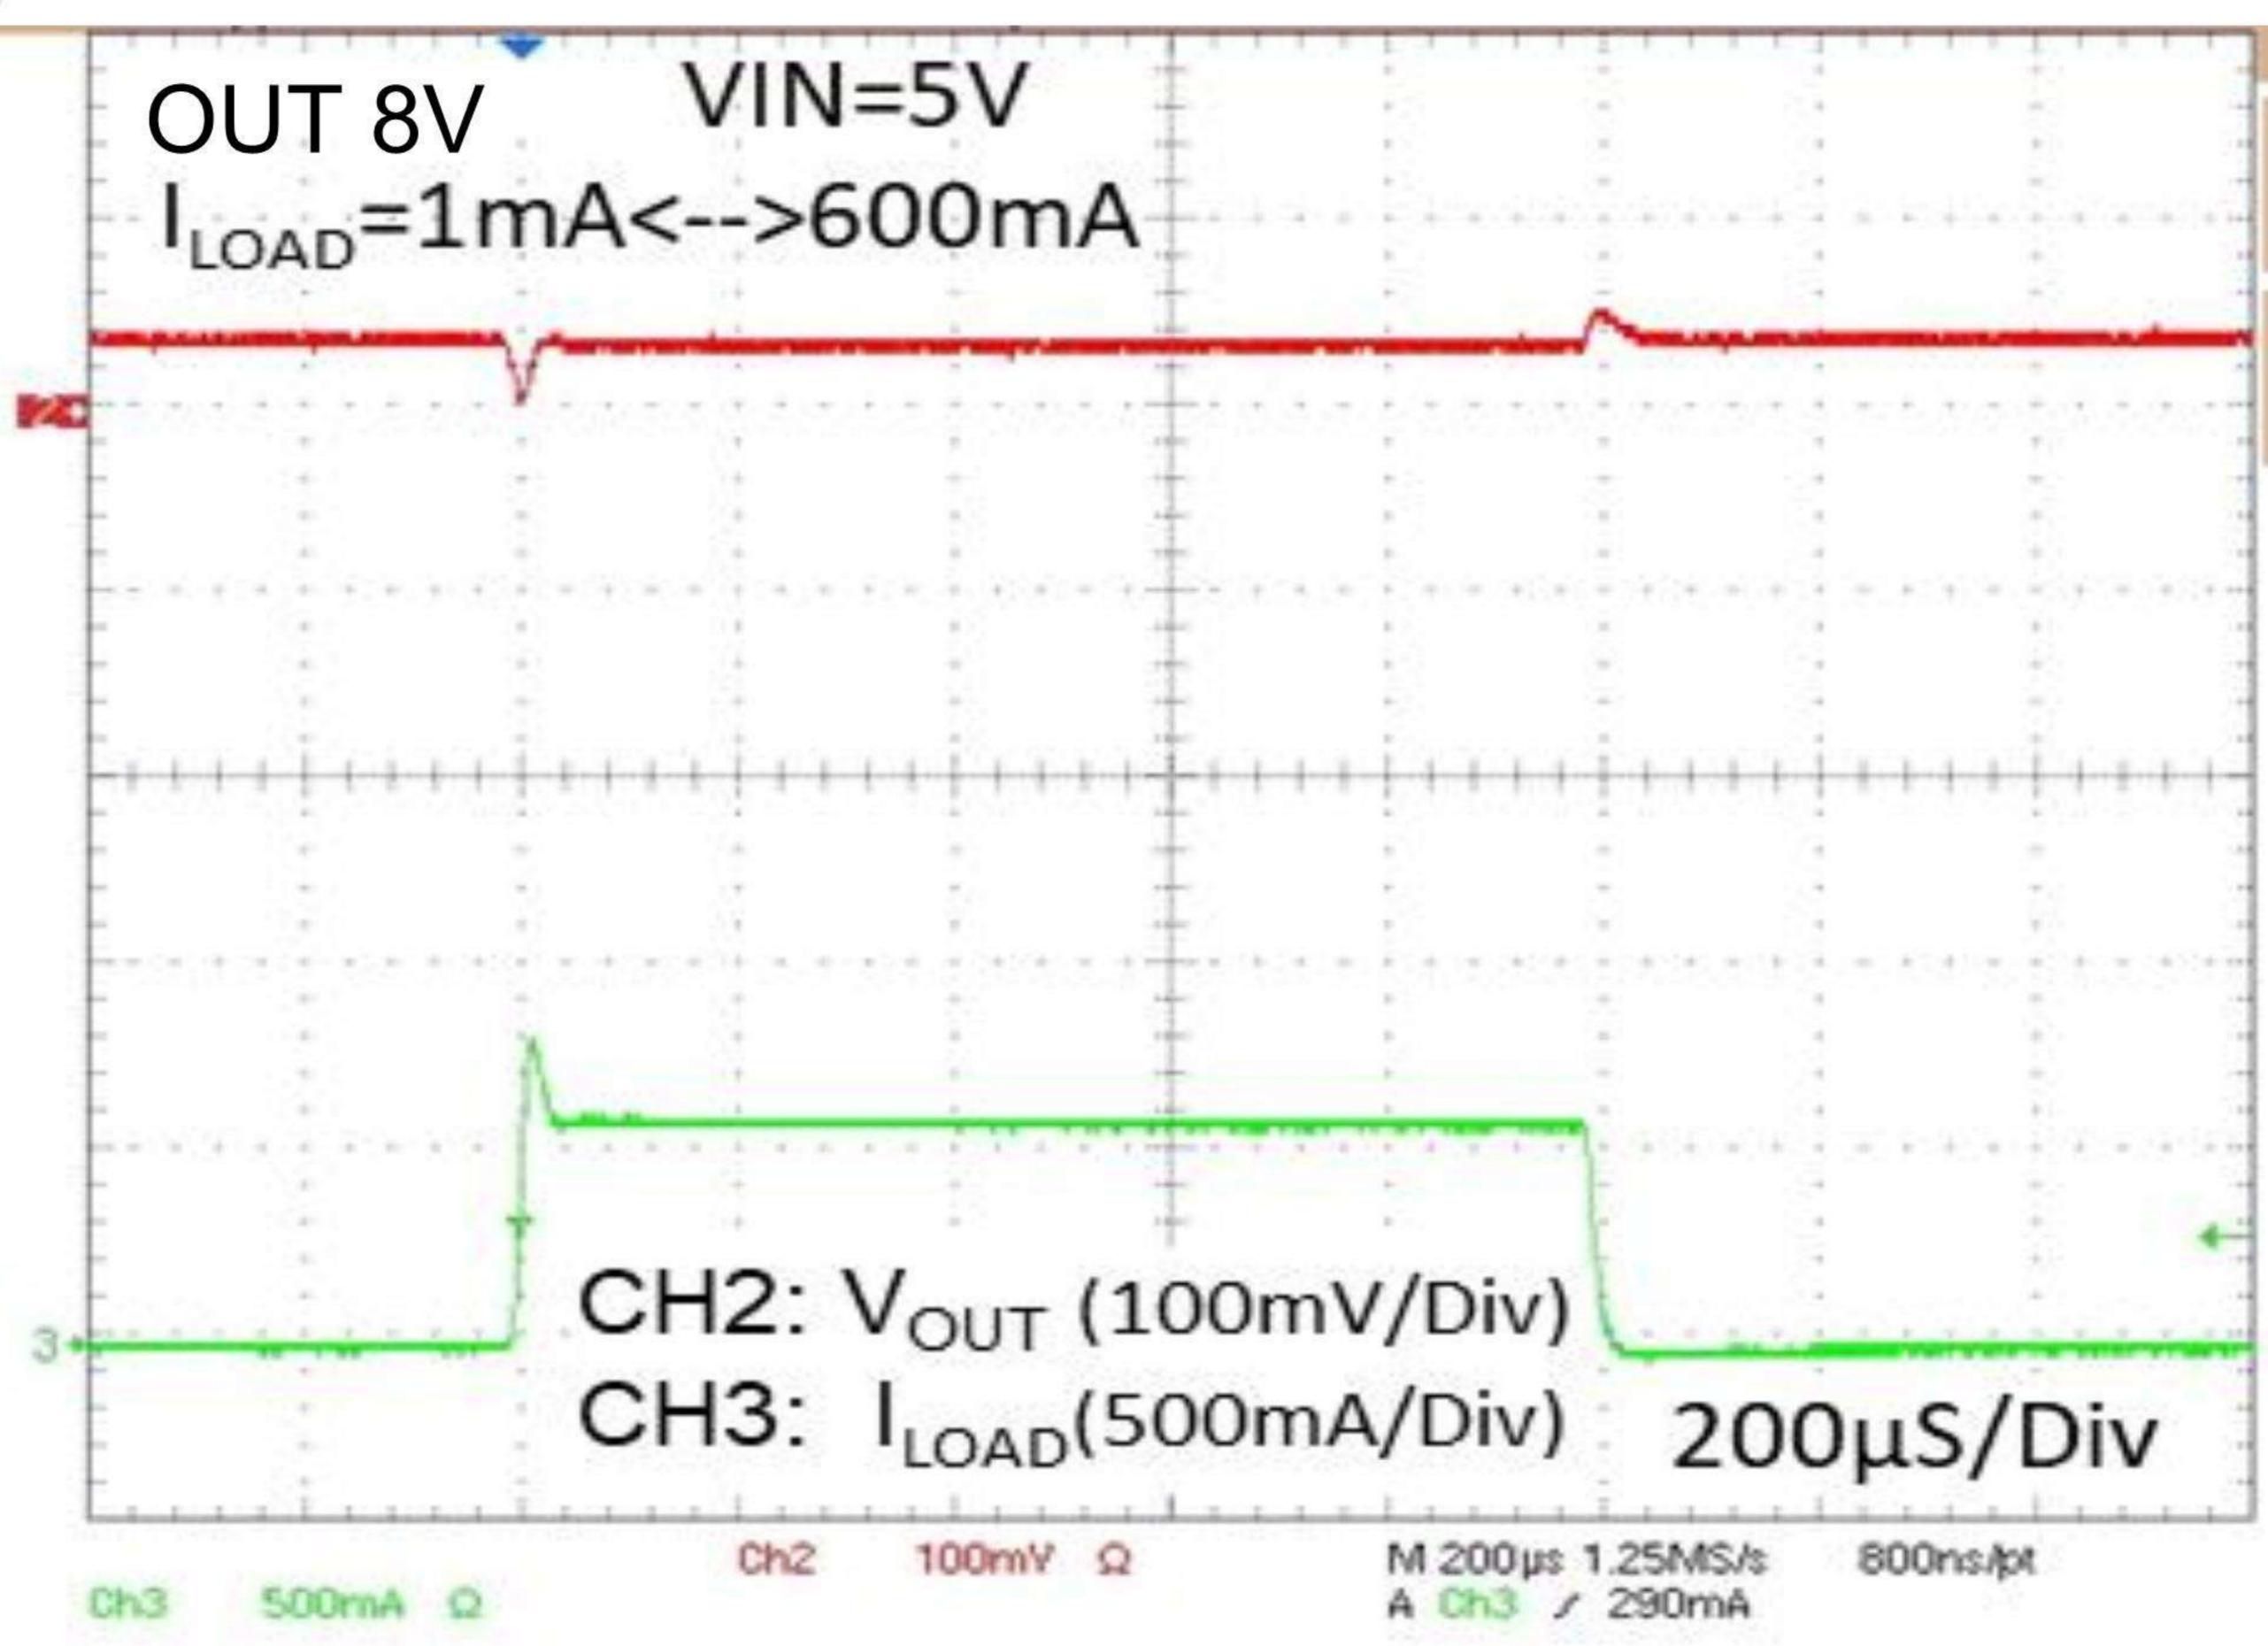



500mA,5uA, Higt PSRR Voltage Reaulators

www.sot23.com.tw

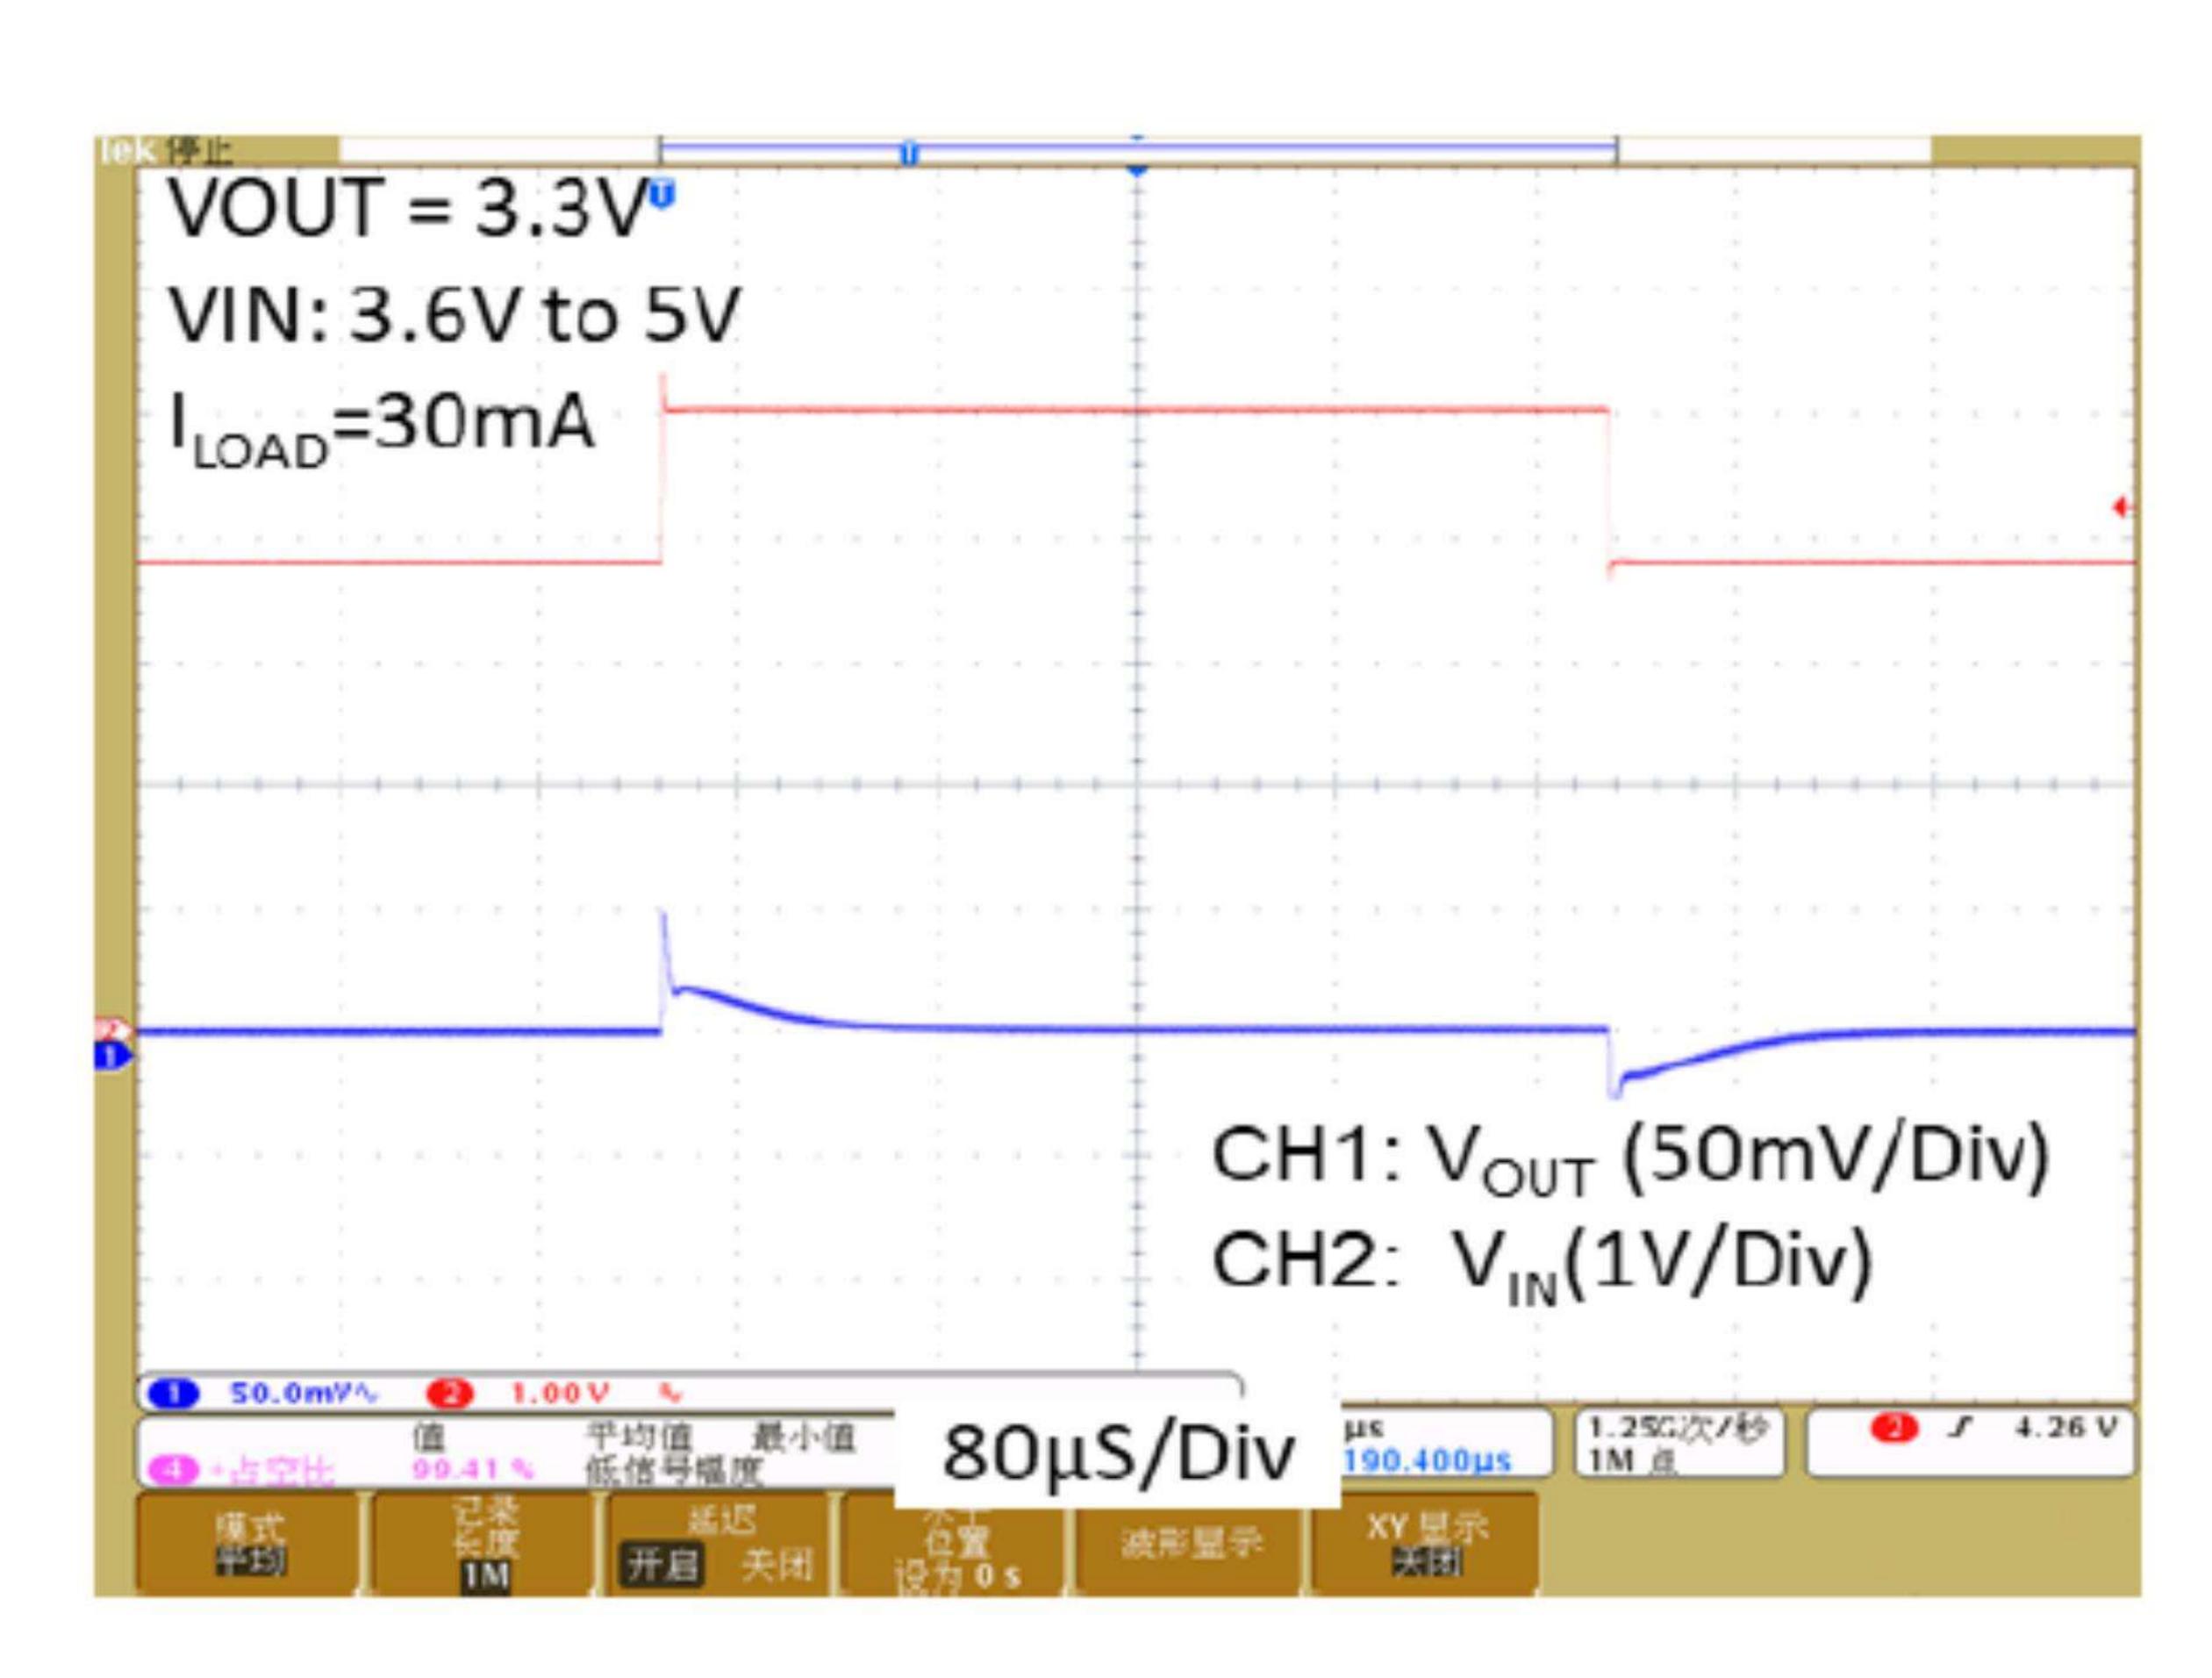


Fig. 17 Line Transient Response

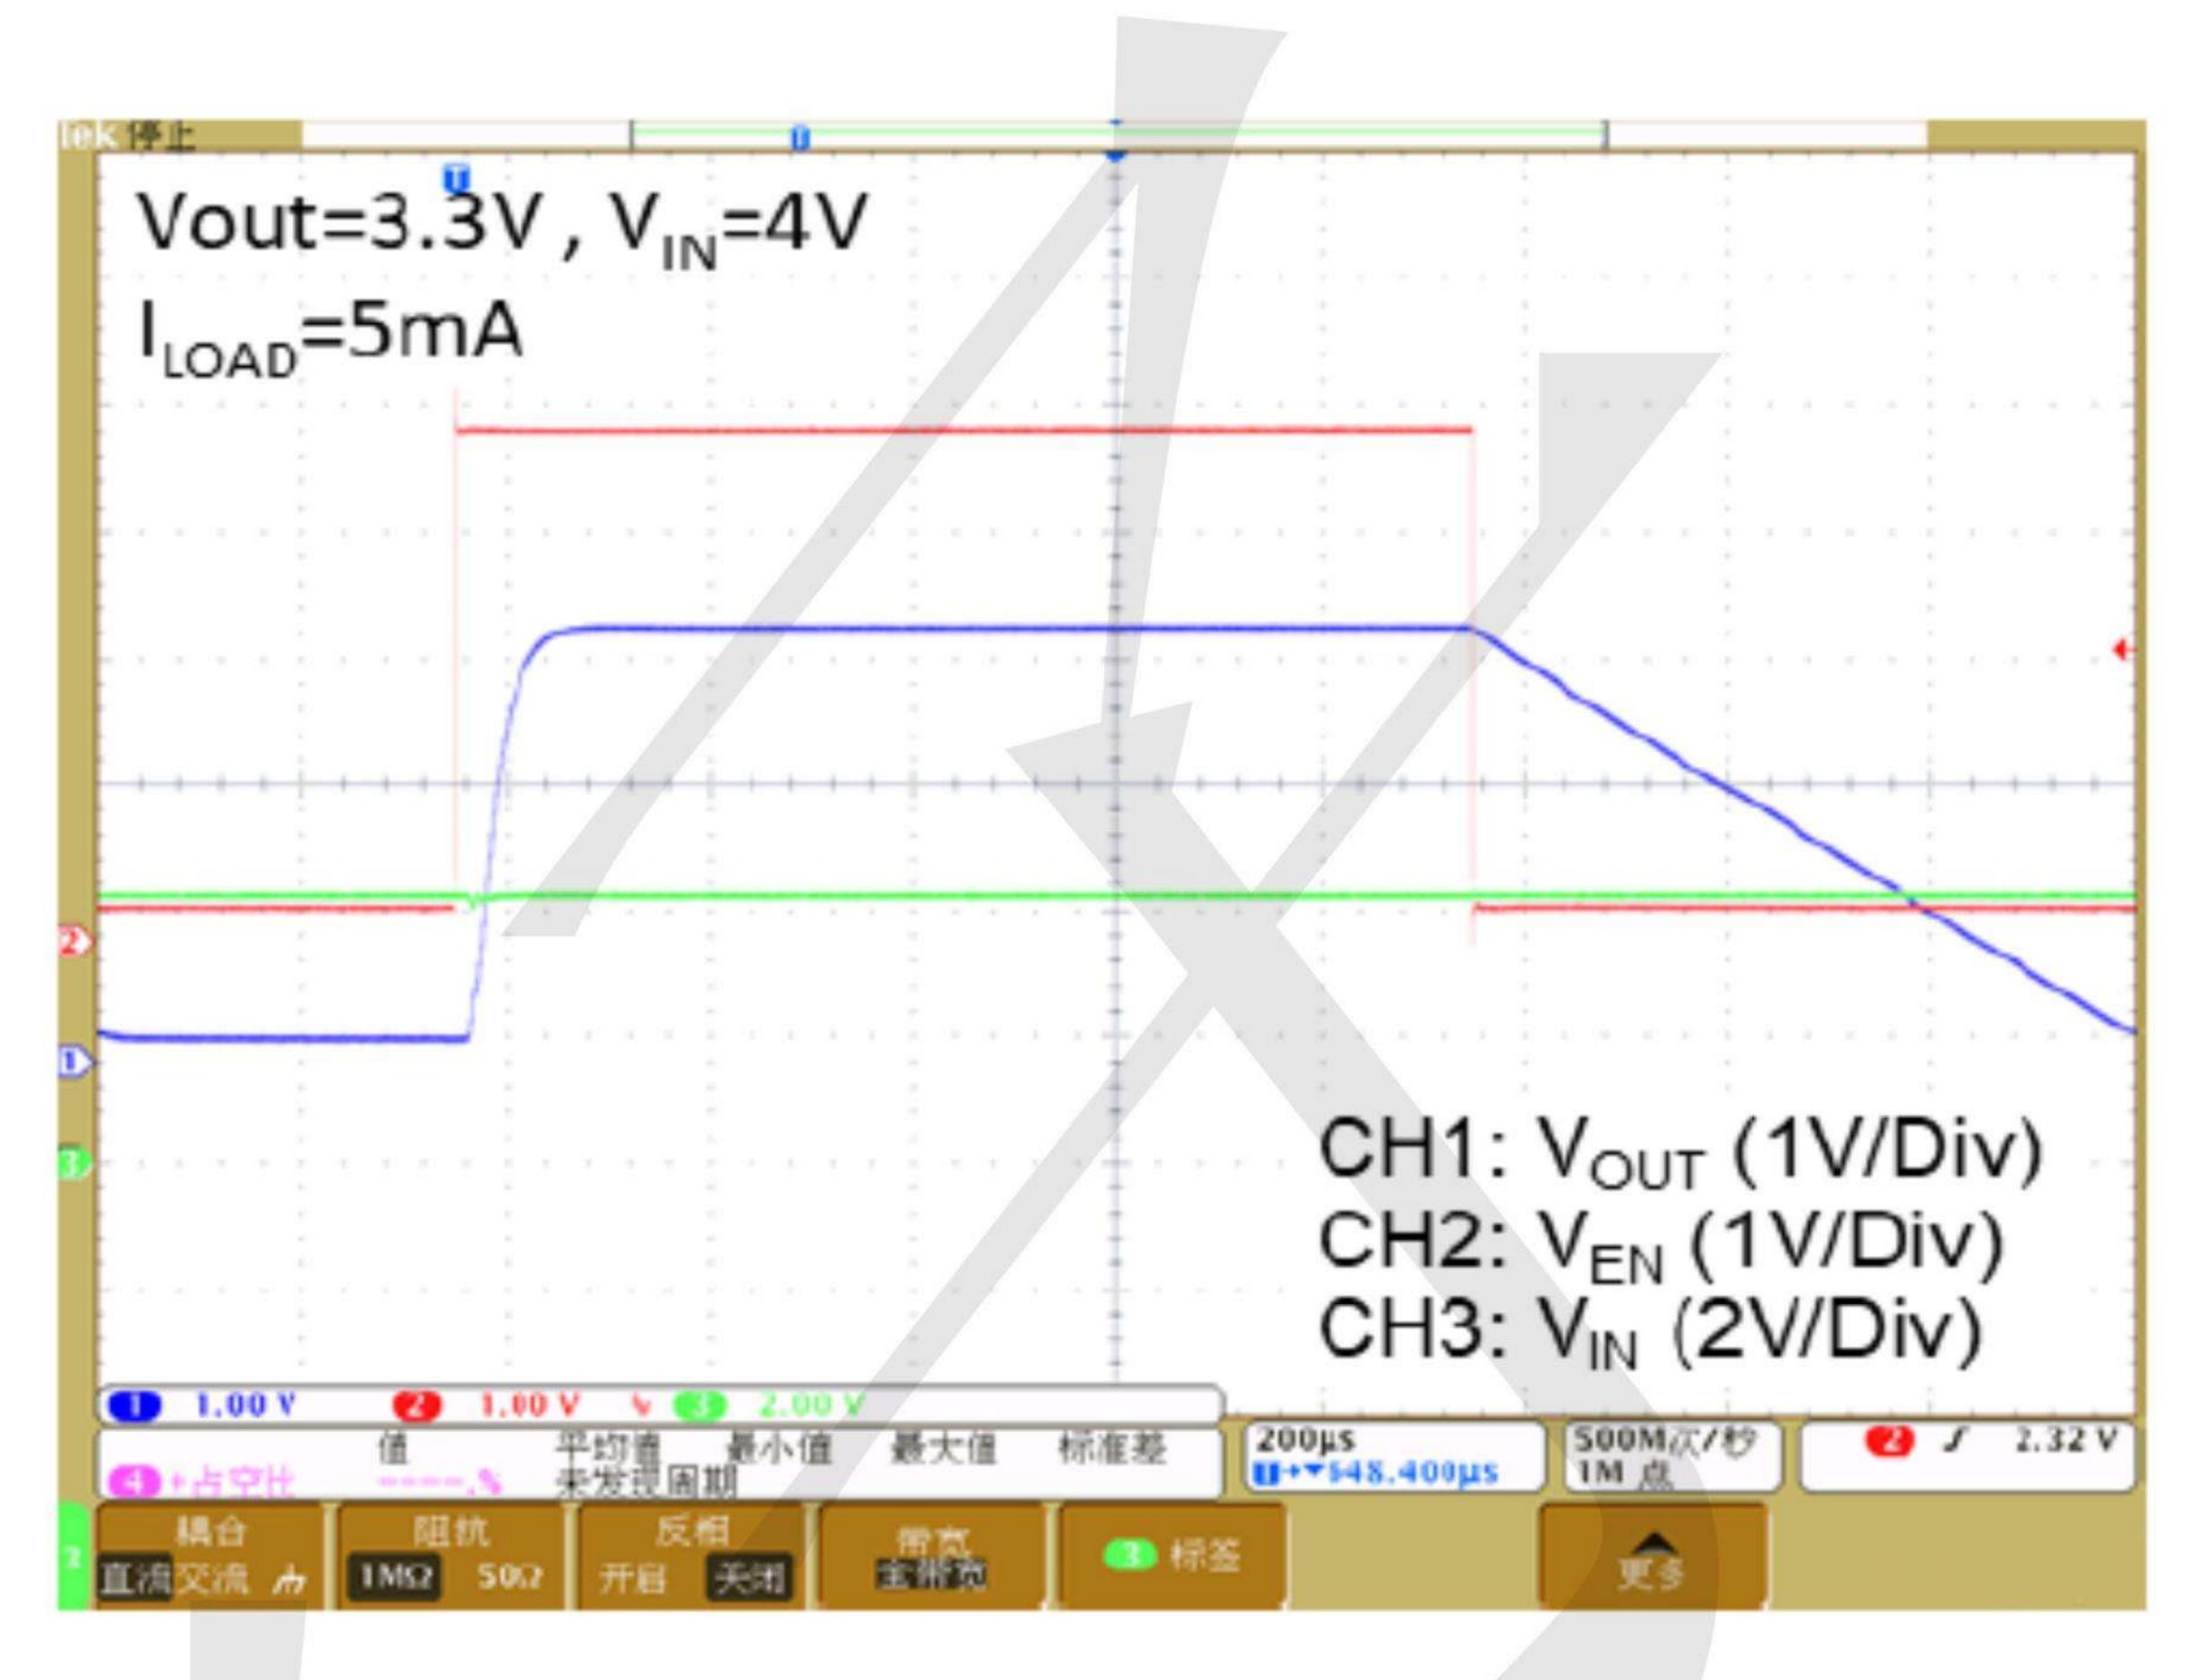


Fig. 18 V_{OUT} Turn On/Off by EN






500mA,5uA, Higt PSRR Voltage Reaulators

www.sot23.com.tw

BLOCK DIAGRAM

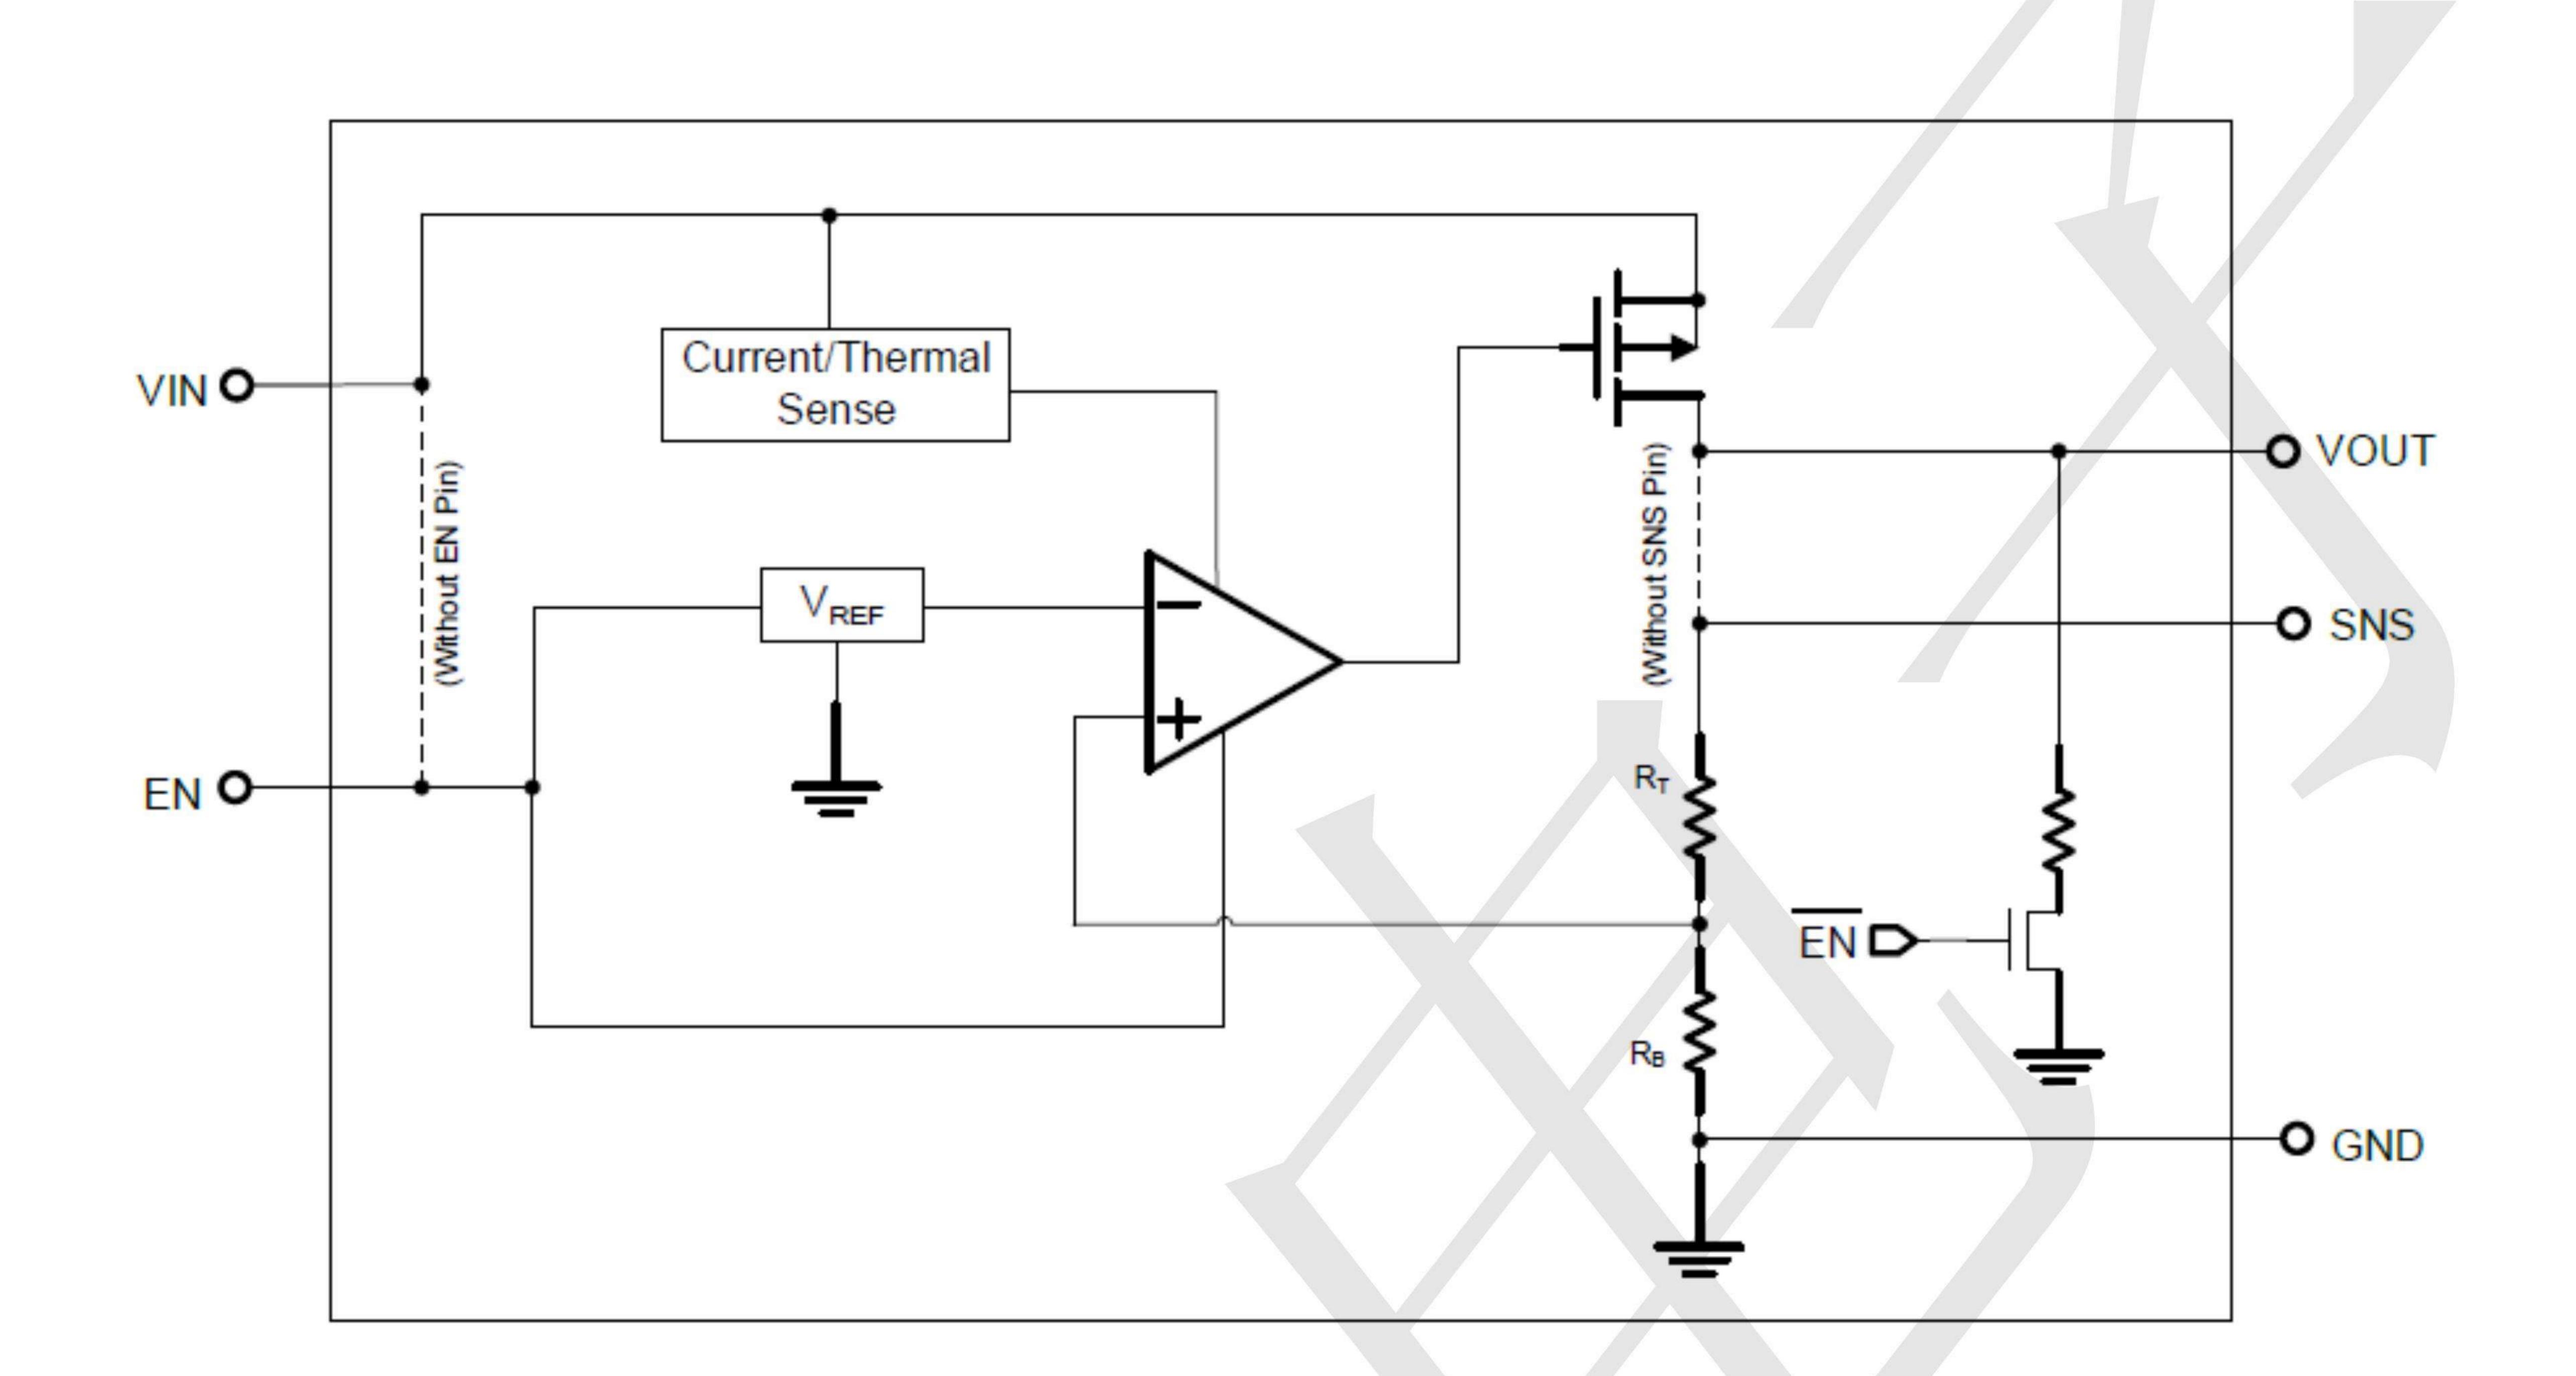






500mA,5uA, Higt PSRR Voltage Reaulators

www.sot23.com.tw

Package informantion SOT23-5

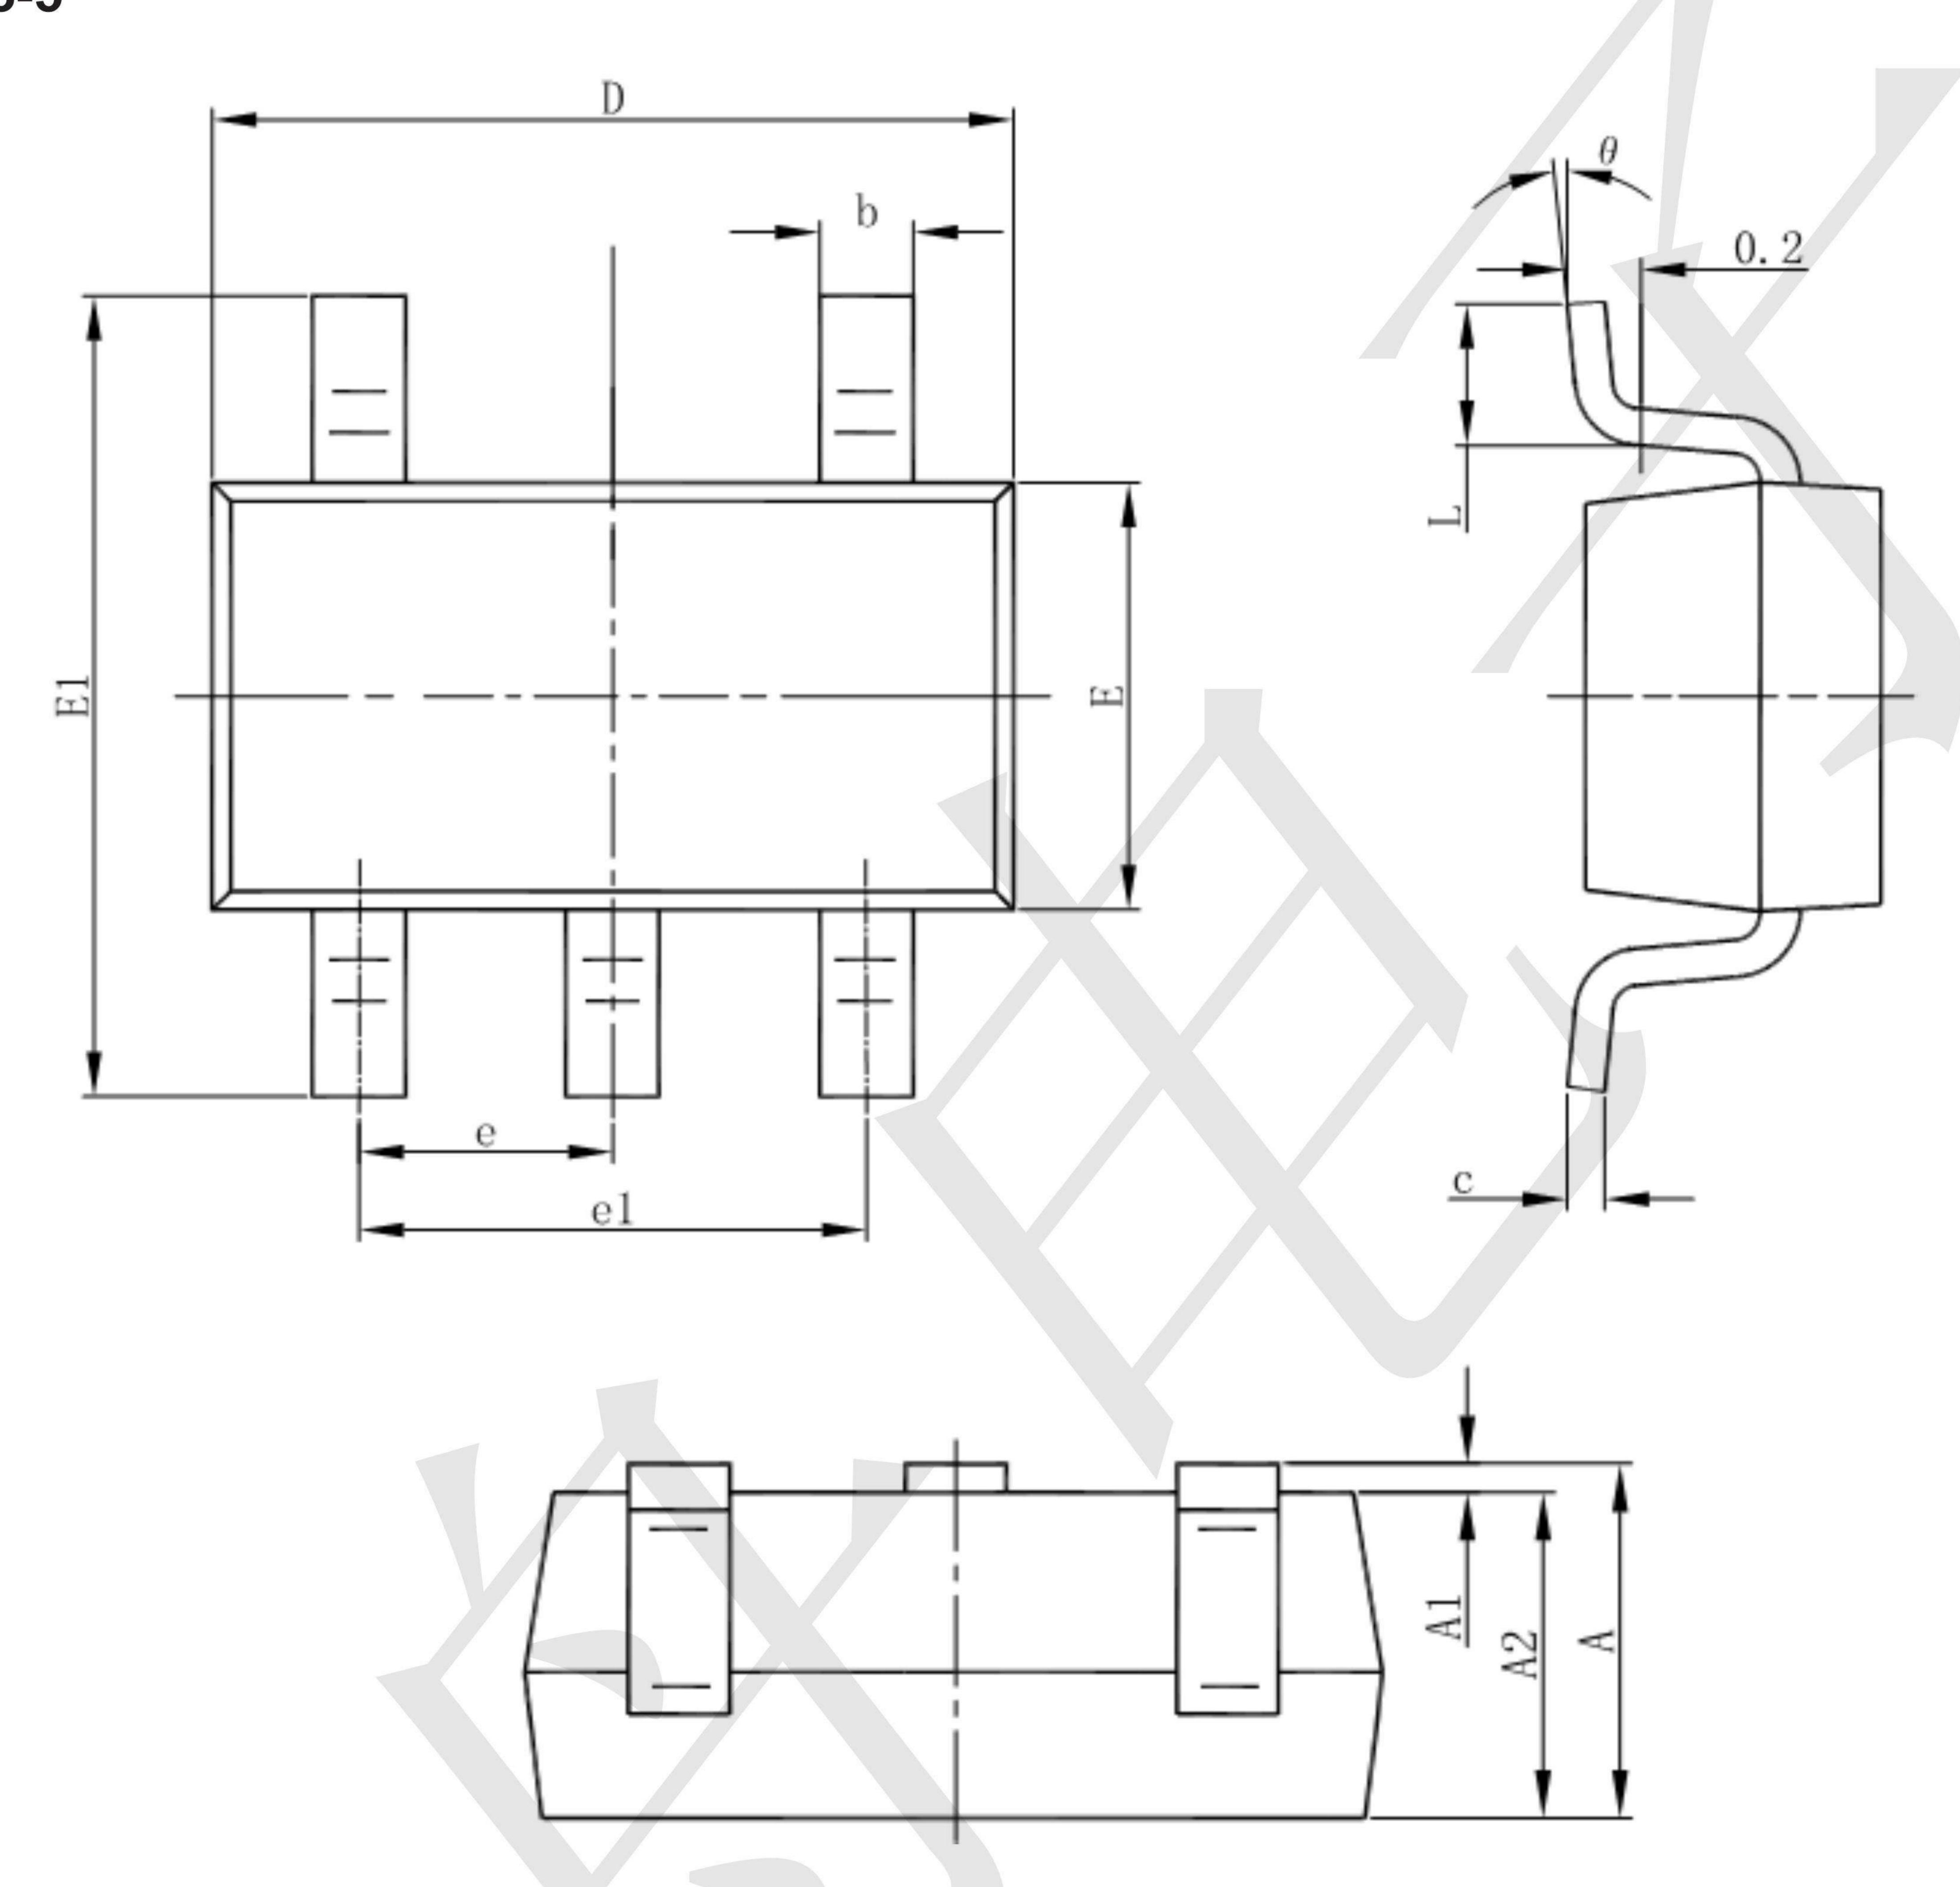

C	Dimensions In	Millimeters	Dimensions In Inches		
Symbol	Min	Max	Min	Max	
A	1.050	1.250	0.041	0.049	
A1	0.000	0.100	0.000	0.004	
A2	1.050	1.150	0.041	0.045	
b	0.300	0.500	0.012	0.020	
C	0.100	0.200	0.004	0.008	
D	2.820	3.020	0.111	0.119	
E	1.500	1.700	0.059	0.067	
E1	2.650	2.950	0.104	0.116	
e	0.950(BSC)		0.037(BSC)		
e1	1.800	2.000	0.071	0.079	
L	0.300	0.600	0.012	0.024	
θ	0°	8°	0°	8°	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Linear Voltage Regulators category:

Click to view products by TECH PUBLIC manufacturer:

Other Similar products are found below:

LV56831P-E LV5684PVD-XH MCDTSA6-2R L7815ACV-DG PQ3DZ53U LV56801P-E TLE42794G L78L05CZ/1SX L78LR05DL-MA-E 636416C 714954EB BA033LBSG2-TR LV5680P-E L78M15CV-DG TLS202B1MBV33HTSA1 L79M05T-E TLS202A1MBVHTSA1 L78LR05D-MA-E NCV317MBTG NTE7227 LV5680NPVC-XH LT1054CN8 MP2018GZD-5-Z MP2018GZD-33-Z MIC5281-3.3YMM MC78L06BP-AP TA48LS05F(TE85L,F) TA78L12F(TE12L,F) TC47BR5003ECT TCR2LN12,LF(S TCR2LN28,LF(S TCR2LN30,LF(S TCR3DF295,LM(CT TCR3DF40,LM(CT BA178M20CP-E2 L78M12ABDT LM7812SX/NOPB LR645N3-G-P003 LR645N3-G-P013 ZXTR2005P5-13 SCD7812BTG TCR3DF335,LM(CT ZXTR2012K-13 TLE42994E V33 ZXTR2008K-13 ZXTR2005K-13 L88R05DL-E ADP3300ARTZ-2.7RL7 LM120K-15/883 IFX54441LDVXUMA1