

### Features

- High Input Voltage Range: up to 12V
- Maximum Output Current: 250mA
- Low Quiescent current: 2 $\mu$ A
- Low Dropout: 200mV ( typ )@100mA (3.3V)
- Low Output Voltage Accuracy:  $\pm$ 2%
- Low Power Consumption
- Low Temperature Coefficient
- Available Packages: SOT89-3、SOT-23-5

### Applications

- Battery powered portable devices
- Smart phone, tablet
- Hi resolution camera sensor power
- Wireless modules
- RF, PLL, VCO clock power

### General Description

The XC6201P is a low-dropout (LDO) voltage regulators with enable function offering the benefits of high input voltage, low-dropout voltage, low-power consumption, and miniaturized packaging.

The features of low quiescent current as low as 2.0  $\mu$ A and zero disable current is ideal for powering the battery equipment to a longer service life. The XC6201P

is stable with the ceramic output capacitor over its wide input range from 2V to 12V and the entire range of output load current.

### Ordering Information

**XC6201P332PR**

PACKAGE TYPE

PR: SOT-89-3

MR: SOT-23-5

OUTPUT VOLTAGE

12: 1.2V

15: 1.5V



18: 1.8V

30: 3.0V

33: 3.3V


50: 5.0V

### Pin Distribution



Pin Name	Pin Function
NC	NO Connected
GND	Ground
VOUT	Output Voltage
VIN	Power Input Voltage

### Typical Application Circuit

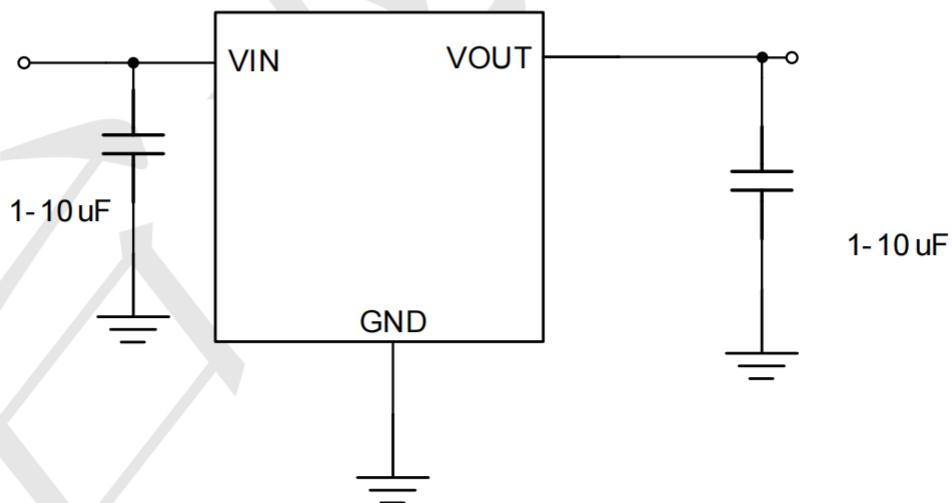

### Absolute Maximum Rating ( $T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter		Value	Unit
Supply Voltage		-0.3~+15	V
Power Dissipation	SOT-23-5	250	mW
	SOT-89	500	mW
Thermal Resistance, Junction-to-Ambient	SOT-23-5	200	$^{\circ}\text{C}/\text{W}$
	SOT-89	500	$^{\circ}\text{C}/\text{W}$
Operating Ambient Temperature		-40 ~ +85	$^{\circ}\text{C}$
Storage temperature range		-50 ~ +125	$^{\circ}\text{C}$
ESD Voltage	HBM	2	KV

### Recommended Operating Conditions


Parameter	Value	Unit
Supply Voltage	15	V
Maximum Output Current	300	mA
Operating Ambient Temperature	-40 ~ +85	$^{\circ}\text{C}$

### Electrical Characteristics (T =25°C unless otherwise noted)

( $V_{IN}=V_{OUT}+2$ ,  $C_{IN}=10\mu F$ ,  $C_{OUT}=10\mu F$ ,  $T_A=25^\circ C$ , unless otherwise noted.)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Input Voltage	$V_{IN}$		--	--	12	V
Output Voltage Accuracy	$\Delta V_{OUT}$	$I_{OUT}=10mA$	-2	--	+2	%
Max. Output Current	$I_{OUT}$		300	--	--	mA
Quiescent Current	$I_Q$	$I_{OUT}=0mA$	--	1.5	3	$\mu A$
Dropout Voltage <sup>Note1</sup>	$V_{DROP}$	$2.8V \leq V_{OUT} < 3.0V$ , $I_{OUT}=10mA$	--	30	55	mV
		$3.0V \leq V_{OUT} < 3.3V$ , $I_{OUT}=100mA$	--	210	300	
		$3.3V \leq V_{OUT} < 3.6V$ , $I_{OUT}=100mA$	--	195	300	
		$3.6V \leq V_{OUT} < 4.0V$ , $I_{OUT}=100mA$	--	180	300	
		$4.0V \leq V_{OUT} < 4.4V$ , $I_{OUT}=100mA$	--	170	300	
		$4.4V \leq V_{OUT} < 5.0V$ , $I_{OUT}=100mA$	--	160	300	
		$5.0V \leq V_{OUT} < 9.0V$ , $I_{OUT}=100mA$	--	150	300	
		$9.0V \leq V_{OUT}$ , $I_{OUT}=100mA$	--	130	300	
Line Regulation	$\Delta V_{LINE}$	$V_{IN}=V_{OUT}+2$ to 20V, $I_{OUT}=1mA$	--	--	0.2	%/V
Load Regulation	$\Delta V_{LOAD}$	$1mA < I_{OUT} < 300mA$	--	37	100	mV
Short Current	$I_{SHORT}$	$V_{OUT}=0V$	--	250	--	mA
Limit Current	$I_{LIMIT}$	$V_{IN}=V_{OUT} + 2V$ , $I_{OUT}=1mA$	--	530	--	mA
Power Supply Rejection Ratio	PSRR	$V_{OUT}=3V$ , $I_{OUT}=100mA$ , $f=1KHz$	--	33	--	dB
Thermal Shutdown Temperature	$\frac{\Delta V_{OUT}}{V_{OUT} \times \Delta T_A}$	$V_{IN}=V_{OUT}+2V$ , $I_{OUT}=10mA$ $-40^\circ C \leq T_A \leq 85^\circ C$	--	100	--	ppm/ $^\circ C$


### Block Diagram

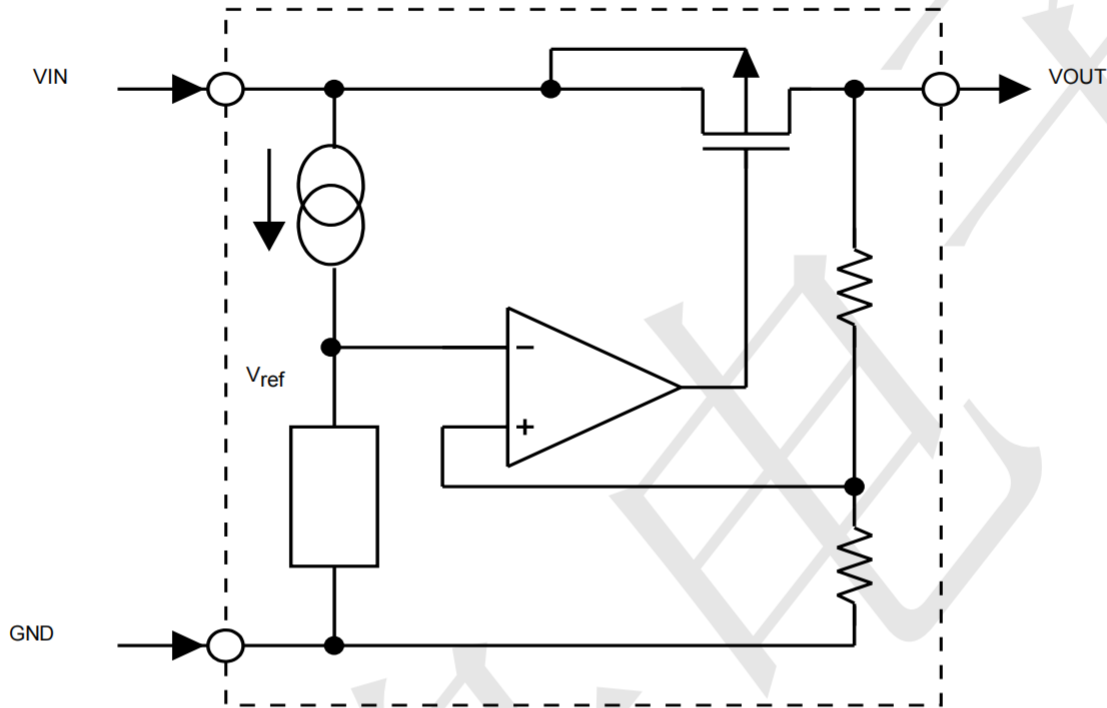



### Package information

SOT23-5

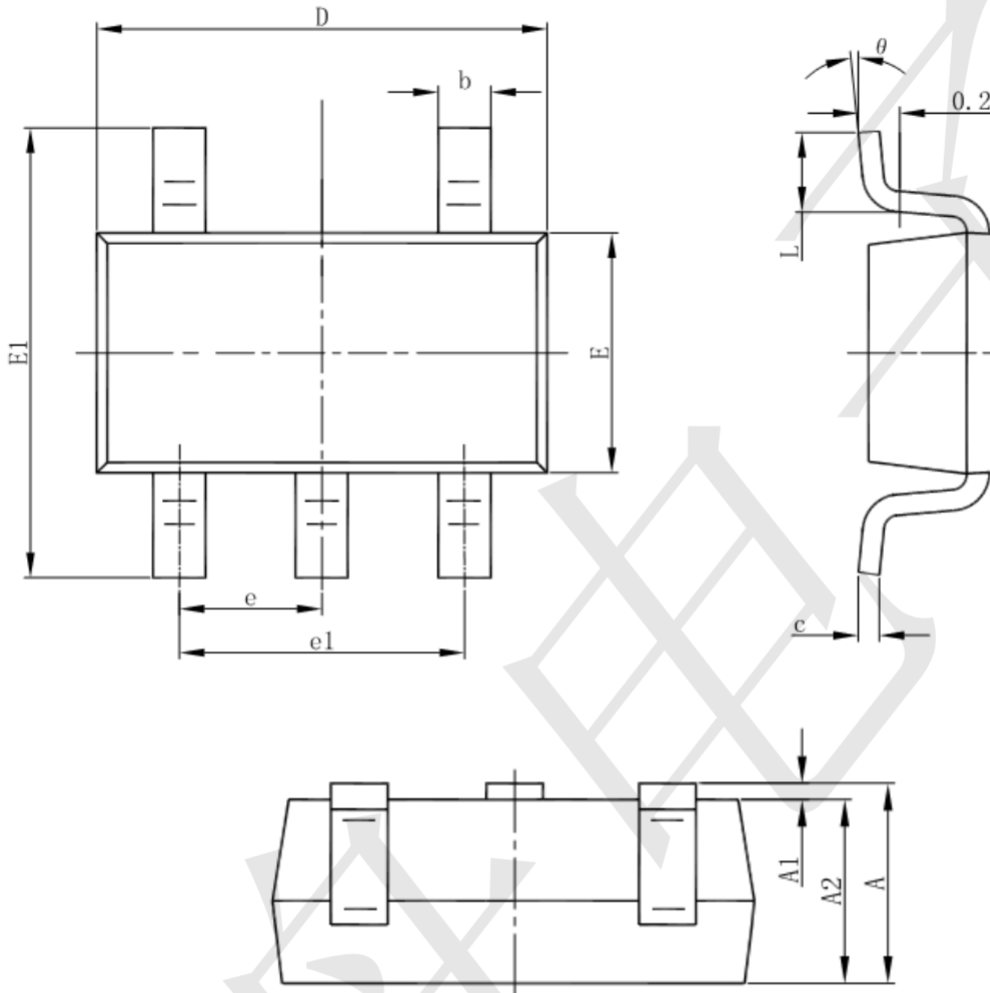


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°



### Package information

SOT89-3

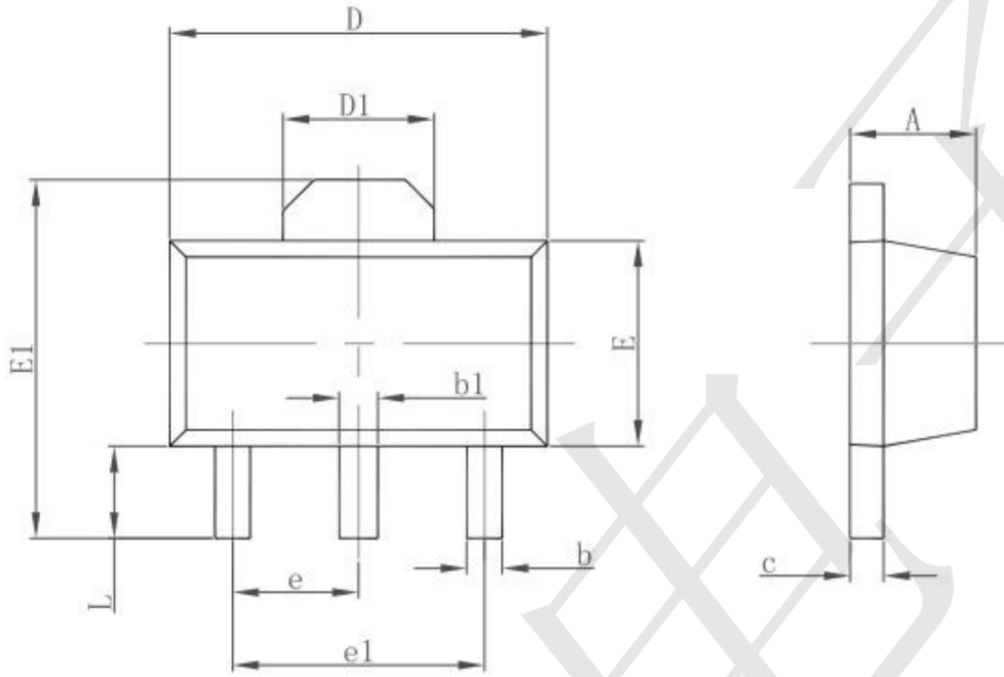

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LDO Voltage Regulators](#) category:*

*Click to view products by [TECH PUBLIC](#) manufacturer:*

Other Similar products are found below :

[AP7363-SP-13](#) [NCV8664CST33T3G](#) [L79M05TL-E](#) [AP7362-HA-7](#) [PT7M8202B12TA5EX](#) [TCR3DF185,LM\(CT](#) [TLF4949EJ](#)  
[NCP4687DH15T1G](#) [NCV8703MX30TCG](#) [LP2951CN](#) [NCV4269CPD50R2G](#) [AP7315-25W5-7](#) [NCV47411PAAJR2G](#) [AP2111H-1.2TRG1](#)  
[ZLDO1117QK50TC](#) [AZ1117ID-ADJTRG1](#) [NCV4263-2CPD50R2G](#) [NCP114BMX075TCG](#) [MC33269T-3.5G](#) [TLE4471GXT](#) [AP7315-33SA-](#)  
[7](#) [NCV4266-2CST33T3G](#) [NCP715SQ15T2G](#) [NCV8623MN-50R2G](#) [NCV563SQ18T1G](#) [NCV8664CDT33RKG](#) [NCV4299CD250R2G](#)  
[NCV8702MX25TCG](#) [TLE7270-2E](#) [NCV562SQ25T1G](#) [AP2213D-3.3TRG1](#) [AP2202K-2.6TRE1](#) [NCV8170BMX300TCG](#)  
[NCV8152MX300180TCG](#) [NCP700CMT45TBG](#) [AP7315-33W5-7](#) [NCP154MX180300TAG](#) [AP2113AMTR-G1](#) [NJW4104U2-33A-TE1](#)  
[MP2013AGG-5-P](#) [NCV8775CDT50RKG](#) [NJM2878F3-45-TE1](#) [S-19214B00A-V5T2U7](#) [S-19214B50A-V5T2U7](#) [S-19213B50A-V5T2U7](#) [S-](#)  
[19214BC0A-E8T1U7\\*1](#) [S-19213B00A-V5T2U7](#) [S-19213B33A-V5T2U7](#) [S-19213BC0A-V5T2U7](#) [S-1313D18-N4T1U4](#)