

### **Technical Data Sheet**

Rev. B (5/21) Page 1 of 2

# E-Line Flux Remover & Maintenance Cleaner

Product# 1621-10S, 1621-10SB, 1621-G, 1621-5G, 1621-54G

### **Product Description**

E-Line is a hydrocarbon based defluxer formulated to be powerful, yet very economical. Eliminates brushing and scrubbing, saving time and materials. Micro-components and fine pitch leads are delicate and easily damaged, so brushing and scrubbing should be avoided if possible. Techspray aerosol solvents have a powerful spray and strong solvent that blasts off residues and cleans areas under components that a brush cannot touch.

#### Features / Benefits


- Powerful cleaner
- Ideal for sensitive plastics
- Safe on electronics
- Rapid evaporation
- Zero residue
- Proven effective for lead-free processes
- Non-ozone depleting

### **Call-Outs / Specifications**

- FORD TOX#142431
- USDA Accepted K2

### Compatibility

Material Name	Compatibility
ABS:	Excellent
Nylon:	Excellent
Lexan:	Excellent
HDPE:	Excellent
LDPE:	Excellent
C.E. Phenolic:	Excellent
PMMA:	Excellent
POM:	Excellent
PP:	Excellent
PS:	Excellent
PTFE:	Excellent
PVC:	Excellent

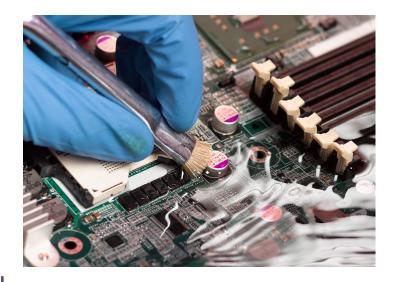

### **Typical Product Data and Physical Properties**

ODOR:	Characteristic hydrocarbon odor
Appearance:	Clear, Colorless liquid
Percent volatile:	100 at 20°C (68°F)
Vapor Pressure:	55.49 mmHg@20°C (VOC Composite
	Vapor Pressure)
Flashpoint and method:	(22°F) TAG CC
Solubility in water:	to 32 at 20°C (68°F)
<b>Evaporation Rate:</b>	> 1 (TCE=1)
Density:	0.713g/mL at 25°C
VOC:	Aerosol 75%
	Bulk 100%, 5.6 lbs/gal (671g/l)
Shelf Life	5 years



### **Technical Data Sheet**

Rev. B (5/21) Page 2 of 2

## E-Line Flux Remover & Maintenance Cleaner

Product# 1621-10S, 1621-10SB, 1621-G, 1621-5G, 1621-54G

### **Usage Instructions**

FOR PROFESSIONAL OR INDUSTRIAL USE ONLY. Disconnect equipment from power source. Hold can 6-8 inches away. When used as a general cleaner, start at top of area to be cleaned using a sweeping motion and spray the area, slowly working toward the bottom. To clean in hard to reach areas, insert extension tube in sprayhead.. Allow components to dry completely before applying current.

### **Packaging and Availability**

**1621-10S** 10oz. aerosol (284g) **1621-10SB** 10oz. aerosol w/brush (284g)

 1621-G
 1 gallon (3.8L)

 1621-5G
 5 gallon (19L)

 1621-54G
 54 gallon (205L)

### **Environmental Policy**

Techspray® is committed to developing products to ensure a safer and cleaner environment. We will continue to meet and sustain the regulations of all federal, state and local government agencies.

#### **Resources**

Techspray® products are supported by global sales, technical and customer services resources.

For additional technical information on this product or other Techspray® products in the United States, call the technical sales department at 800-858-4043, email tsales@techspray.com or visit our web site at: www.techspray.com.

Important Notice to Purchaser/User: The information in this publication is based on tests that we believe are reliable. The results may vary due to differences in tests type and conditions. We recommend that each user evaluate the product to determine its suitability for the intended application. Conditions of use are outside our control and vary widely. Techspray's only obligation and your only solution is replacement of product that is shown to be defective when you receive it. In no case will Techspray® be liable for any special, incidental, or consequential damages based on breach of warranty, negligence or any other theory.



tsales@techspray.com

Europe

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Chemicals category:

Click to view products by Techspray manufacturer:

Other Similar products are found below:

DP-605NS 3045-QT 3125-9S 5200-WHITE-3OZ 3748-Q-58"x8" FO-25DT S1009-KIT-A-CS8606 DP100-200ML 1743-2FP 152-KA-NC VERSIL406 826-450G 9729 9223 9945 7000000275 1601 8330-19G 842AR-15ML 841AR-150ML 842AR-P 843WB-15ML 8462-85ML 4354-1L 838AR-P 838AR-15ML 419D-P-BK 419D-P-GR 419D-P-WH 8MT-450 8MT-25 832HD-25ML 8616-25ML 832FX-450ML 834ATH-375ML 832HD-400ML 8617-1P 843AR-340G 9310-300ML 847-1P 4228-225ML 419D-55ML 8800-375ML 8810-375ML 8820-2.55L 419E-340G 842UR-12ML 419D-1L CW3300WHITE CW2205