




## G3 Contact Cleaner

1632

Contact cleaners remove oxidation, oil, and other contaminants off of contacts, metal switches, motors, relays, generators, edge connectors, buss bars, circuit breakers, scales and sensors. Contact cleaners are used in electrical maintenance and to repair faulty contacts by removing insulative contamination. Techspray offers a variety of solvents and waterbased cleaners that allow customers to match the right products with their cleaning needs. Choosing a strong, high quality cleaner saves time and money. Grease and oil flow right off, reducing the time and materials needed to scrub off stubborn soils.

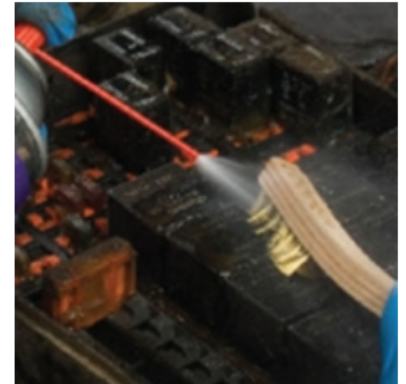

### Non-flammable & powerful cleaner

Patented non-flammable contact cleaner formulated to be powerful, yet economical. Eliminate brushing and scrubbing, saving time and materials.

- Powerful cleaner
- Non-flammable
- Non-ozone depleting
- Safe on electronics
- Rapid evaporation
- Zero residue
- Safe on most plastics
- EPA SNAP approved
- Dielectric strength 36.2 kv

Specifications:

- Boeing spec D6-17487 rev. P
- Ford Tox #167835

Licensing: The use of G3 products for cleaning are subject to U.S. patent no. 5,902,412 and use is restricted by Techspray.

---

## Product Packaging

1632-16S  
G3 Contact Cleaner  
16 oz  
12 units/case



**Techspray**  
P.O. Box 949, Amarillo, TX 79105  
800-858-4043 • [www.techspray.com](http://www.techspray.com)



---

## Instructions

Disconnect equipment from power source. Make sure opening of sprayhead is pointing toward surface to be cleaned. Hold can 6-8 inches away. Direct spray to saturate soiled surface. A TechBrush® (2000 Series) may be utilized to help in the removal of heavy soils. When used as a general cleaner, start at top of area to be cleaned using a sweeping motion and spray the area, slowly working toward the bottom. To clean in hard to reach areas, insert extension tube in sprayhead to direct spray. Allow components to dry completely before applying current.

---

## Technical Information

### Chemical & Physical Properties

Appearance	Clear, colorless liquid
Odor	Faint ethereal odor
Flash Point	none
Boiling Point	39°C (102.2°F)

### Chemical Composition

CHEMICAL NAME	CAS #
1,1,1,2,2,3,3,4,5,5,5-decafluoropentane (HFC-4310mee)	138495-42-8
1,2-transdichloroethylene	156-60-5
Carbon dioxide	124-38-9



**TECHSPRAY**  
**Technical Data Sheet**

**Plastics & Rubber Compatibility**

MATERIAL NAME	RATING
ABS	Not compatible
Nylon	Excellent
Lexan	Not compatible
HDPE	Excellent
LDPE	Excellent
C. E. Phenolic	Excellent
PMMA	Not compatible
POM	Excellent
PP	Excellent
PS	Not compatible
PTFE	Excellent
PVC	Excellent

**Environmental Policy**

Techspray is committed to developing products to ensure a safer and cleaner environment. We will continue to meet and sustain the regulations of all federal, state and local government agencies.

**Resources**

Techspray products are supported by a global sales, technical and customer services resources.

For additional technical information on this product or other Techspray products in the United States, call the technical sales department at 800-858-4043, email [tsales@techspray.com](mailto:tsales@techspray.com) or visit our web site at: [www.techspray.com](http://www.techspray.com).

**North America**  
 Techspray  
 P.O. Box 949  
 Amarillo, TX 79105  
 800-858-4043  
 Email: [tsales@techspray.com](mailto:tsales@techspray.com)

**Europe**  
 ITW Contamination Control  
 Saffierlaan 5  
 2132 VZ Hoofddorp  
 The Netherlands  
 +31 88 1307 400  
 Email: [info@itw-cc.com](mailto:info@itw-cc.com)

**Countries Outside US**  
 Call to locate a distributor in your country.

Important Notice to Purchaser/User: The information in this publication is based on tests that we believe are reliable. The results may vary due to differences in tests type and conditions. We recommend that each user evaluate the product to determine its suitability for the intended application. Conditions of use are outside our control and vary widely. Techspray's only obligation and your only solution is replacement of product that is shown to be defective when you receive it. In no case will Techspray be liable for any special, incidental, or consequential damages based on breach of warranty, negligence or any other theory.

© 2014 Techspray, A Division of ITW



**Techspray**  
 P.O. Box 949, Amarillo, TX 79105  
 800-858-4043 • [www.techspray.com](http://www.techspray.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Chemicals](#) category:*

*Click to view products by [Techspray](#) manufacturer:*

Other Similar products are found below :

[DP-605NS](#) [3045-QT](#) [3125-9S](#) [3748-Q-58"x8"](#) [FO-25DT](#) [S1009-KIT-A-CS8606](#) [DP100-200ML](#) [1743-2FP](#) [152-KA-NC](#) [826-450G](#) [3789-Q](#)  
[9729](#) [9223](#) [9945](#) [7000000275](#) [1601](#) [8330-19G](#) [842AR-15ML](#) [841AR-150ML](#) [842AR-P](#) [843WB-15ML](#) [8462-85ML](#) [4354-1L](#) [838AR-P](#)  
[838AR-15ML](#) [419D-P-BK](#) [419D-P-GR](#) [419D-P-WH](#) [8MT-450](#) [8MT-25](#) [832HD-25ML](#) [832FX-450ML](#) [834ATH-375ML](#) [832HD-400ML](#)  
[8617-1P](#) [843AR-340G](#) [843ER-800ML](#) [9310-300ML](#) [847-1P](#) [4228-225ML](#) [8800-375ML](#) [8810-375ML](#) [8820-2.55L](#) [419E-340G](#) [842UR-](#)  
[12ML](#) [419D-1L](#) [CW3300WHITE](#) [CW2205](#) [10447](#) [9620-945ML](#)