

THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.


ELECTRICAL CHARACTERISTICS

CHARACTERISTIC IMPEDANCE	77 ± 5 ohms, Method C at 1 MHz
CAPACITANCE - MUTUAL	30 pF/ft. (maximum)
ATTENUATION	1.0 dB/100 ft. (nominal) at 1 MHz
SURFACE TRANSFER IMPEDANCE	2 Milliohms/meter (max) at 30 MHz

ADDITIONAL REQUIREMENTS

COMPONENT WIRE PRIOR TO CABLING (Per MIL-W-22759)	300 ± 3°C for 7 hours, 1.00 inch mandrel, .500 lb. 2.5 kV dielectric test
ACCELERATED AGING	-55 ± 2°C for 4 hours, 1.50 inch mandrel, 1.00 lb. 2.5 kV dielectric test
LOW TEMPERATURE-COLD BEND	200 ± 3°C for 6 hours, 1.25 inch (maximum) in 12.0 inches
SHRINKAGE	5000 megohms for 1000 ft. (minimum insulation resistance (dielectric) elongation (minimum) 50% (minimum) 5000 lb/ft ² (minimum) tensile strength (dielectric) impulse dielectric test
FINISHED CABLE (Per MIL-C-27500)	200°C for 6 hours blocking low temperature-cold bend -65 ± 2°C for 4 hours, 6.0 inch mandrel
CROSSLINKED VERIFICATION	300 ± 5°C for 6 hours, 2.25 inch mandrel
FLAMMABILITY	3 seconds (maximum); 3.0 inches (maximum); no flaming of facial tissue (Per Raychem Spec 55A, Procedure 1)
SHIELD COVERAGE (EACH)	90% (minimum)
JACKET FLAWS	1000 volts, 60 Hz, 100% test
VOLTAGE WITHSTAND (DIELECTRIC)	1000 volts (rms) (minimum)
JACKET THICKNESS	.009 inch thick (nominal)
JACKET	5000 lb/ft ² (minimum) tensile strength
ELONGATION	50% (minimum)
WRAP	.002 inch thick (nominal), 25% overlap (minimum)
WEIGHT	57.2 lbs/1000 ft. (nominal)

CONSTRUCTION DETAILS

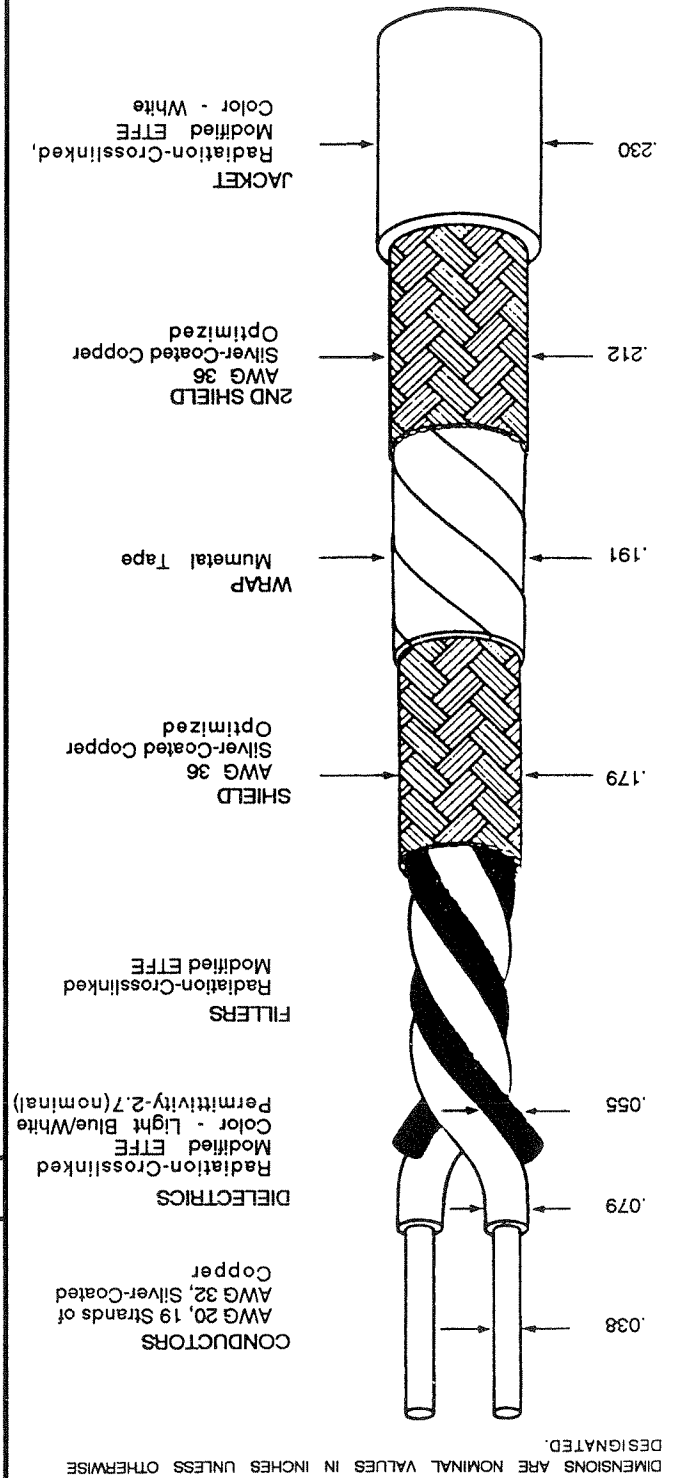

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for te connectivity manufacturer:

Other Similar products are found below :

[570416-000](#) [CLTEQ-M81CE-SSRELAY-4-20V](#) [4-1633138-8](#) [4-1195131-0](#) [650069-000](#) [SMD100-2](#) [DTS20W19-11PD-3028](#) [DTS20W19-11PD-3028-LC](#) [DTS20W19-32SD-3028-LC](#) [DTS20W19-32SD-3028](#) [NC6-P104-06](#) [TXR64AB90-3616AI](#) [DTS26F21-41HE](#) [DTS26F21-41AE](#) [DTS26F21-41PE-LC](#) [DTS26F21-11SE-3028-LC](#) [D38999/24WF32JE](#) [D38999/24WF32SE-LC](#) [DTS24W19-32HE](#) [D38999/20JB35HA](#) [D38999/24WJ20PA](#) [164-8033-08](#) [D38999/24FF32JE](#) [D38999/24FF32SE-LC](#) [D38999/24WF32JB](#) [D38999/24WG11HA](#) [D38999/24WG11HN](#) [MS27467T21F11H](#) [DJT16E21-11HA](#) [DTS24F19-32HE](#) [DTS20W19-32SA-3028-LC](#) [DTS24F19-11SC-3028-LC](#) [DTS24F19-11SC-3028](#) [DJT14E13-98HB](#) [D38999/20WC8BB](#) [1-330599-5](#) [DTS24F21-41HN-LC](#) [DTS24F21-41HN](#) [DTS24F21-41AN](#) [DTS24F21-39HN](#) [DTS24F21-41PN-LC](#) [AFD50-10-6SN-1A-LC](#) [DJT10F17-26HC](#) [DTS24W19-32HB](#) [ACT20JE99HA](#) [DJT10E17-26HC](#) [DJT10E17-26HN](#) [DJT10F17-26HA](#) [DJT16F17-26HB](#) [MS27467T21F11J](#)