


SPECIFICATION CONTROL DRAWING			0024G0024
<b>CHEMINAX</b>	100 OHM, AWG 24, 19 STRANDS OF AWG 36, OPTIMIZED SHIELD, TWINAXIAL CABLE	Date	1-16-13
		Revision	E
THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.			
CONSTRUCTION DETAILS		ELECTRICAL CHARACTERISTICS	
DIMENSIONS ARE NOMINAL VALUES IN INCHES UNLESS OTHERWISE DESIGNATED.   <p><b>CONDUCTORS</b> AWG 24, 19 Strands of AWG 36, Silver-Coated High-Strength Copper Alloy</p> <p><b>DIELECTRICS</b> Rayfoam H Colors - Light Blue/White</p> <p><b>FILLERS</b> Radiation-Crosslinked, Modified ETFE</p> <p><b>SHIELD</b> AWG 38, Tin-Coated Copper Optimized</p> <p><b>JACKET</b> Modified FEP</p> <p>Dimensions: .0250, .054 ± .003, .036, .125, .149 (nominal), .153 (maximum)</p>		CHARACTERISTIC IMPEDANCE 100 ± 7 ohms, Method C at 1 MHz MUTUAL CAPACITANCE 13.5 pF/ft. (nominal) VELOCITY OF PROPAGATION 76% (nominal) CAPACITANCE UNBALANCE 3% (nominal) SURFACE TRANSFER IMPEDANCE 100 milliohms/meter (maximum) (Per MIL-DTL-85485 at 30 MHz)	
		ADDITIONAL REQUIREMENTS	
		<b>ELECTRICAL</b>	
		CONDUCTOR RESISTANCE 26.5 ohms/1000 ft. (nominal) (prior to cabling) INSULATION RESISTANCE 10,000 megohms (minimum) for 1000 ft. JACKET FLAWS SPARK TEST 1.0 kV (rms) IMPULSE TEST 6.0 kV (peak) VOLTAGE WITHSTAND (DIELECTRIC) 1000 volts (rms) (minimum)	
		<b>ENVIRONMENTAL</b>	
		FLAMMABILITY Method B HEAT SHOCK 225°C LOW TEMPERATURE-COLD BEND -55°C/4.00 inch mandrel VOLTAGE WITHSTAND (Post Environmental) 1000 volts (rms), 1 minute	
		<b>PHYSICAL</b>	
		INSULATION (DIELECTRIC) (prior to cabling) ELONGATION 50% (minimum) TENSILE STRENGTH 600 lbf/in <sup>2</sup> (minimum) JACKET ELONGATION 200% (minimum) TENSILE STRENGTH 2000 lbf/in <sup>2</sup> (minimum) JACKET THICKNESS .012 inch (nominal)	
Outer jacket color will be translucent white (designated by a "-9X" appended to the part number, e.g. 0024G0024-9X) unless otherwise specified.		WEIGHT 18.8 lbs/1000 ft. (nominal)	
Designate outer jacket color with a dash number in accordance with MIL-STD-681. Other codes and suffixes may be added to the part number, as necessary, to capture any additional requirements imposed by the purchase order.			
Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics Corporation also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.			
Page 1 of 1	Rayfoam, Cheminax, Raychem, TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.		

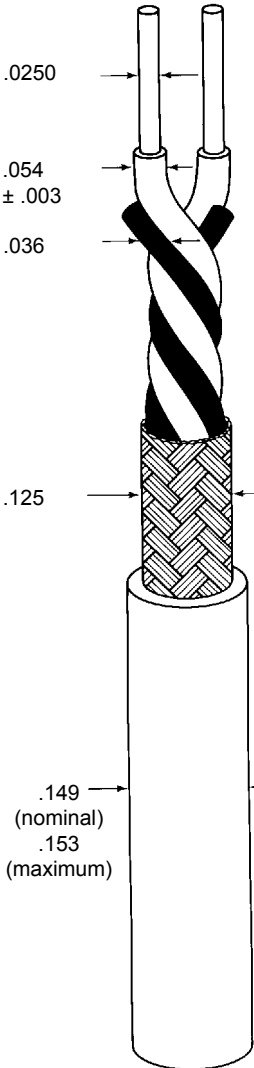

Raychem Wire & Cable  
 501 Oakside Avenue  
 Redwood City, California 94063-3800  
 1-800-227-8816 Fax: 1-650-361-6297

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Coaxial Cables](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[89880-003-1000](#) [CY2389-000](#) [8221-010-U1000](#) [9116-010-U500](#) [1322R-010-1000](#) [1807A-B59-U1000](#) [2020K8421-9X-CS3417](#) [9251-010-1000](#) [9275-010-U1000](#) [935240-000](#) [980704-001](#) [CF2823-000](#) [33312-010-500](#) [CZ1589-000](#) [5022W0809-0CS3263](#) [10610-4-4](#) [EF8108-000](#) [1673B TIN100](#) [672525-001](#) [144517-000](#) [735A1-008-1000](#) [8212-010-U500](#) [480414-000](#) [7915A 009U1000](#) [5024A1311-0](#) [1281S5 010250](#) [1530A 010U1000](#) [9248 010U1000](#) [9244 0101000](#) [1694A 0081000](#) [1190A 0101000](#) [8241F J5C1000](#) [1674A TIN50](#) [7915A 0091000](#) [TRCH-50-2](#) [9066 0031000](#) [7805R 008100](#) [1674A TIN100](#) [9116SB 0101000](#) [9271 0061000](#) [1613A 0101000](#) [1807A B591000](#) [5339Q5 009U500](#) [539945 0091000](#) [9116R 0101000](#) [89207 010100](#) [9058 0101000](#) [8241A 0101000](#) [DA7805R 0101000](#) [C6424](#)