



MHR SERIES

Miniature General Purpose AC LVDT

SPECIFICATIONS

- ◆ **Small size and low mass core**
- ◆ **High output signal**
- ◆ **Stroke ranges from ± 0.005 to ± 2 inches**
- ◆ **AC operation from 2kHz to 20kHz**
- ◆ **Stainless steel housing**
- ◆ **Imperial or metric threaded core**

The legendary **MHR Series** LVDTs provide precision measurements in space restrictive applications. With a diameter of just 3/8 inch [9.5mm], and an extremely lightweight core, the MHR Series is ideal for applications where excessive core weight could influence the motion; with less inertia, accurate measurements at higher displacement speeds are easier to achieve. The lightweight core also reduces mechanical stresses and helps preserve the structural integrity of the core actuation assembly.

The high output sensitivity resulting from the close electrical coupling between the coil and core provides ample signal for interfacing with practically all signal conditioners and conditioning circuits. The magnetic stainless steel housing provides electromagnetic and electrostatic shielding.

The high temperature operation (200°C) model, MHR-T is available for stroke ranges of ± 0.025 to ± 1 inch. A High pressure (vented case) model, MHR-V is also available. The MHR is compatible with the full line of Measurement Specialties LVDT signal conditioners.

Like in most of our LVDTs, the MHR windings are vacuum impregnated with a specially formulated, high temperature, flexible resin, and the coil assembly is potted inside its housing with a two-component epoxy. This provides excellent protection against hostile environments such as high humidity, vibration and shock.

FEATURES

- ◆ Compact size
- ◆ Lightweight core
- ◆ $\pm 0.25\%$ linearity (100% stroke)
- ◆ Shock and vibration tolerant
- ◆ Stainless steel case
- ◆ Calibration certificate supplied with each unit

APPLICATIONS

- ◆ X, Y, Z stage position feedback
- ◆ Wire-die bonding machines
- ◆ Cylinder position feedback
- ◆ Voice coil testing
- ◆ Materials testing machines
- ◆ Space restricted installations

PERFORMANCE SPECIFICATIONS

| ELECTRICAL SPECIFICATIONS (common) | |
|------------------------------------|-------------------|
| Input voltage | 3 VRMS sine wave |
| Input frequency | 2kHz to 20kHz |
| Test frequency | 2.5kHz (standard) |

| ELECTRICAL SPECIFICATIONS @ 10kHz (recommended operation) | | | | | | | | | |
|---|-------------------|-------------------|-------------------|------------------|------------------|------------------|-----------------|----------------|----------------|
| Parameter | MHR 005 | MHR 010 | MHR 025 | MHR 050 | MHR 100 | MHR 250 | MHR 500 | MHR 1000 | MHR 2000 |
| Stroke range | ±0.005 [±0.13] | ±0.010 [±0.25] | ±0.025 [±0.64] | ±0.05 [±1.27] | ±0.10 [±2.54] | ±0.25 [±6.35] | ±0.5 [±12.7] | ±1 [±25.4] | ±2 [±50.8] |
| Sensitivity V/V/inch [mV/V/mm] | 8.70 [343] | 6.05 [238] | 8.10 [319] | 3.15 [124] | 2.80 [110] | 2.07 [81.5] | 1.96 [77.2] | 0.77 [30.3] | 0.49 [19.3] |
| Output at stroke ends mV/V (*) | 43.5 | 60.5 | 202.5 | 157.5 | 280 | 517.5 | 980 | 770 | 980 |
| Phase shift | +38° | +20° | +21° | +8° | +5° | +7° | +7° | -1° | -15° |
| Input impedance (PRIMARY) | 84Ω | 165Ω | 238Ω | 419Ω | 400Ω | 345Ω | 264Ω | 155Ω | 504Ω |
| Output impedance (SECONDARY) | 302Ω | 300Ω | 485Ω | 154Ω | 200Ω | 420Ω | 810Ω | 450Ω | 1780Ω |
| Non-linearity | ±% of FR | | | | | | | | |
| @ 50% stroke | 0.20 | 0.10 | 0.15 | 0.15 | 0.15 | 0.15 | 0.15 | 0.20 | / |
| @100% stroke (max) | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.50 |
| @125% stroke | 0.30 | 0.35 | 0.25 | 0.35 | 0.25 | 0.35 | 0.30 (**) | 0.50 | / |
| @150% stroke | 0.40 | 0.35 | 0.30 | 0.50 | 0.30 | 0.50 (**) | 0.75 (**) | / | / |
| Null voltage (max.) | 2.5% FRO | 1.0% FRO | 0.5% of FRO | | | | | | |

| ELECTRICAL SPECIFICATIONS @ 2.5kHz (standard calibration) | | | | | | | | | |
|---|-------------------|-------------------|-------------------|------------------|------------------|------------------|-----------------|---------------|---------------|
| Parameter | MHR 005 | MHR 010 | MHR 025 | MHR 050 | MHR 100 | MHR 250 | MHR 500 | MHR 1000 | MHR 2000 |
| Stroke range | ±0.005 [±0.13] | ±0.010 [±0.25] | ±0.025 [±0.64] | ±0.05 [±1.27] | ±0.10 [±2.54] | ±0.25 [±6.35] | ±0.5 [±12.7] | ±1 [±25.4] | ±2 [±50.8] |
| Sensitivity V/V/in [mV/V/mm] | 3.19 [126] | 3.36 [132] | 4.36 [172] | 2.55 [100] | 2.40 [94] | 1.73 [68] | 1.60 [63] | 0.70 [27] | 0.47 [19] |
| Output at stroke ends, mV/V (*) | 16 | 33.6 | 109 | 127.5 | 240 | 432.5 | 800 | 700 | 940 |
| Phase shift | +73° | +59° | +58° | +36° | +30° | +33° | +23° | +6° | +3° |
| Input impedance (PRIMARY) | 59Ω | 78Ω | 116Ω | 141Ω | 135Ω | 147Ω | 145Ω | 100Ω | 304Ω |
| Output impedance (SECONDARY) | 260Ω | 192Ω | 286Ω | 90Ω | 125Ω | 268Ω | 445Ω | 370Ω | 13620Ω |
| Non-linearity | ±% of FR | | | | | | | | |
| @ 50% stroke | 0.20 | 0.10 | 0.15 | 0.15 | 0.15 | 0.15 | 0.15 | 0.20 | / |
| @100% stroke (max) | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 | 0.25 |
| @125% stroke | 0.30 | 0.35 | 0.25 | 0.35 | 0.25 | 0.35 | 0.30 (**) | 0.50 | / |
| @150% stroke | 0.40 | 0.35 | 0.30 | 0.50 | 0.30 | 0.50 (**) | 0.75 (**) | / | / |
| Null voltage (max) | 3% FRO | 1.5% FRO | 0.5% of FRO | | | | | | |

(*) Unit for output at stroke ends is millivolt per volt of input voltage

(**) Requires special reduced core length

MHR SERIES

Miniature General Purpose AC LVDT

| ENVIRONMENTAL SPECIFICATIONS & MATERIALS | |
|--|---|
| Operating temperature | -65°F to +300°F [-55°C to 150°C] |
| Shock survival | 1,000 g (11ms half-sine) |
| Vibration tolerance | 20 g up to 2KHz |
| Housing material | AISI 400 Series stainless steel |
| Electrical connection | Six lead-wires, 32 AWG stranded Copper, PTFE insulated, 1 foot [0.3m] long (<i>longer wires optional</i>) |
| IEC 60529 rating | IP61 |

Notes:

All values are nominal unless otherwise noted

Electrical specifications are for the test frequency indicated in the table


Dimensions are in inch [mm] unless otherwise noted

FR: Full Range is the stroke range, end to end; FR=2xS for ±S stroke range

FRO (Full Range Output): Algebraic difference in outputs measured at the ends of the range

MECHANICAL SPECIFICATIONS

| Parameter | MHR 005 | MHR 010 | MHR 025 | MHR 050 | MHR 100 | MHR 250 | MHR 500 | MHR 1000 | MHR 2000 |
|-----------------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------------------|------------------|------------------|
| Body length "A" | 0.375 [9.5] | 0.535 [13.6] | 0.660 [16.8] | 0.815 [20.7] | 0.990 [25.1] | 1.850 [47.0] | 3.300 [83.82] | 5.600 [142.2] | 8.000 [203.2] |
| Core length "B" | 0.180 [4.6] | 0.233 [5.9] | 0.400 [10.2] | 0.500 [12.7] | 0.625 [15.9] | 1.125 [28.6] | 2.000 [50.8] | 3.000 [76.2] | 3.00 [76.2] |
| Body weight oz [g] | 0.07 [2] | 0.11 [3] | 0.18 [5] | 0.21 [6] | 0.21 [6] | 0.32 [9] | 0.60 [17] | 0.92 [26] | 1.4 [40] |
| Core weight oz [g] | 0.004 [0.1] | 0.007 [0.2] | 0.016 [0.5] | 0.016 [0.5] | 0.025 [0.7] | 0.032 [0.9] | 0.056 [1.6] | 0.088 [2.5] | 0.088 [2.5] |

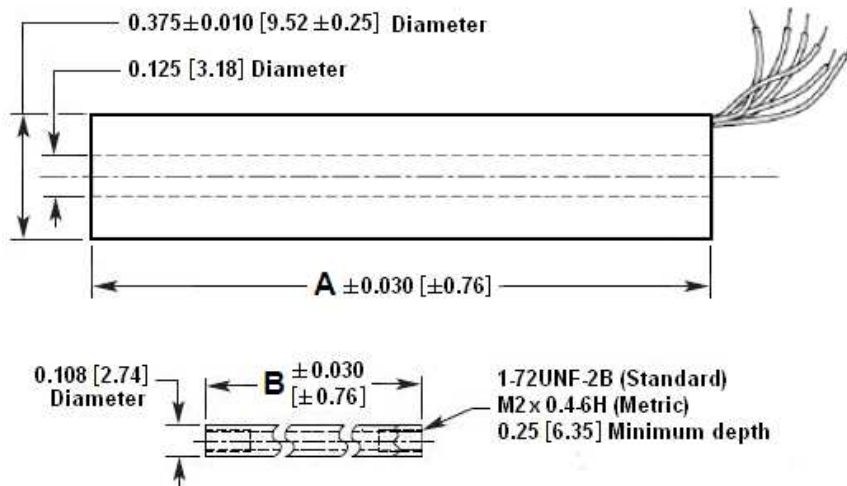


Dimensions are in inch [mm]

MHR SERIES

Miniature General Purpose AC LVDT

WIRING INFORMATION

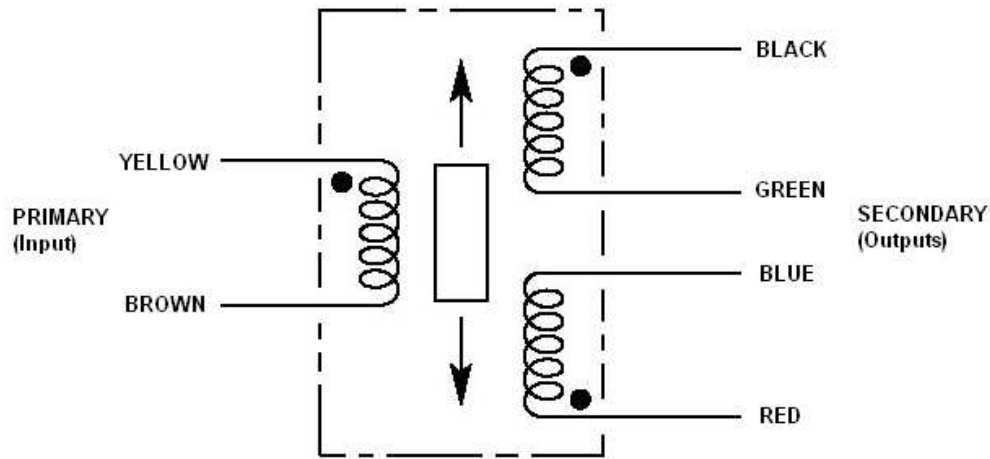

Connect Blue to Green for differential output

ORDERING INFORMATION

| Description | Model | Part Number |
|------------------|---------|--------------|
| ±0.005 inch LVDT | MHR 005 | 02560405-000 |
| ±0.010 inch LVDT | MHR 010 | 02560406-000 |
| ±0.025 inch LVDT | MHR 025 | 02560407-000 |
| ±0.05 inch LVDT | MHR 050 | 02560408-000 |
| ±0.10 inch LVDT | MHR 100 | 02560409-000 |

| Description | Model | Part Number |
|-----------------|----------|--------------|
| ±0.25 inch LVDT | MHR 250 | 02560410-000 |
| ±0.5 inch LVDT | MHR 500 | 02560411-000 |
| ±1 inch LVDT | MHR 1000 | 02560412-000 |
| ±2 inch LVDT | MHR 2000 | 02561033-000 |

| OPTIONS | | |
|-------------------------|-----------------|--------------|
| 5.0 kHz calibration | | XXXXXXXX-002 |
| 10 kHz calibration | | XXXXXXXX-003 |
| Metric threaded core | | XXXXXXXX-006 |
| 10 foot long lead-wires | Consult factory | XXXXXXXX-040 |

Note: Add multiple option dash numbers together to determine proper ordering suffix

Example: MHR 1000, ±1 inch, with 5 kHz calibration and metric threaded core, P/N 02560412-008

| ACCESSORIES | |
|--|--------------|
| Core connecting rod, 6 inches long, 1-72 threads | 05282945-006 |
| Core connecting rod, 12 inches long, 1-72 threads | 05282945-012 |
| Core connecting rod, 24 inches long, 1-72 threads | 05282945-024 |
| Core connecting rod, 36 inches long, 1-72 threads | 05282945-036 |
| Core connecting rod, 6 inches long, M2x0.4 metric threads | 05282976-006 |
| Core connecting rod, 12 inches long, M2x0.4 metric threads | 05282976-012 |
| Mounting block | 04560954-000 |

MHR SERIES

Miniature General Purpose AC LVDT

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity company
Tel: 800-522-6752
Email: customercare.frm@te.com

EUROPE

Measurement Specialties (Europe), Ltd.,
a TE Connectivity Company
Tel: 800-440-5100
Email: customercare.bevx@te.com

ASIA

Measurement Specialties (China) Ltd.,
a TE Connectivity company
Tel: 0400-820-6015
Email: customercare.shzn@te.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Displacement Sensors](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[9810405](#) [9810421](#) [Z4D-F04A](#) [05282945-012](#) [67010001-000](#) [ZG-RPD11](#) [9810907](#) [9810908](#) [04-0760-0006](#) [LCPL Wiper-01](#) [04-0882-0237](#)
[02560412-006](#) [04-0847-0023](#) [02560618-000](#) [RP12250L223BWB](#) [RP12300L223BWB](#) [02560390-000](#) [02350512-000](#) [02560394-000](#)
[HMC1512-TR](#) [E3S-DBP21](#) [E3FC-RN21](#) [E3FC-DP23](#) [E3FC-DP13 2M](#) [LCPL400-10K](#) [060-3613-02](#) [F38000100](#) [F38000105](#) [F38000205](#)
[F38000206](#) [SPS-L035-LATS](#) [SPS-L075-HALS](#) [SPS-L225-HALS](#) [SPS-L225-HDLS](#) [02560407-000](#) [02560409-000](#) [02560405-000](#) [02560408-](#)
[000](#) [02560406-000](#) [02560542-000](#) [02560541-000](#) [02560545-000](#) [02560992-000](#) [05282946-006](#) [02560395-000](#) [02560389-000](#) [02560391-000](#)
[05282947-012](#) [02560398-000](#) [04560950-000](#)