



FEATURES

- Thin piezo film sensor
- Flexible leads give flat profile to the sensor
- Dynamic strain sensing with a high output
- Typical interface to a 1 or 10 M Ω input impedance
- Output Voltage (dependent on force applied) 10 mV to 100V

APPLICATIONS

- Sensing Direct Contact Force
- Recording Time of an Event
- Counting Number of Impact Events
- Measuring Impact Related Events
- Sensing Vibration using Cantilevered Beam
- Wakeup Switch
- Motion Detection


FDT SERIES ELEMENTS WITH LEAD ATTACHMENT

SPECIFICATIONS

- Piezo Film Technology
- Flexible Leads
- High Strain Output
- Film Thickness Options
- Lamination Options
- Solderable Connection Pins

The "F" in FDT Series stands for "Flexible Leads". These are rectangle elements of Piezo film with silver ink screen printed electrodes. Rather than making the lead attachment near the sensor, the Piezo polymer tail extends from the active sensor area as flex circuit material with offset traces. This gives a very flat, flexible lead with a connector at the end.

The FDT elements are available in a variety of different sizes and thicknesses. They are available without a laminate (FDT), with a laminated (0.005" mylar) on one side (FLDT) or with tape release layer adhesive (FDT with adh) in the sensor area.

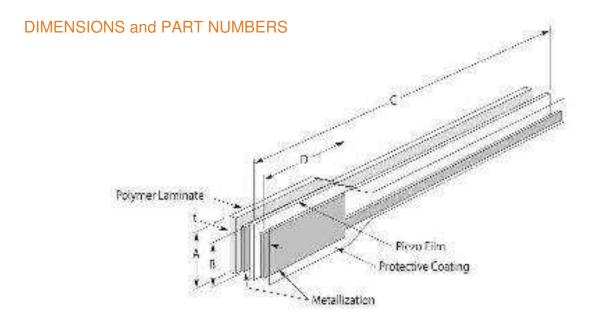

DIMENSION in INCHES (mm)

Model Number	Part Number	Film	Α	В	С	D	t	Cap
		thickness	Film	Electrode	Film	Electrode	(µm)	(nF)
FDT1-028K	1-1002785-1	28 µm	.620 (16)	.485 (12)	9.25 (235)	1.16 (30)	55	1.37
FDT1-052K	2-1002785-1	52 µm	.620 (16)	.485 (12)	9.25 (235)	1.16 (30)	85	.740
FLDT1-028K	1-1002786-1	28 µm	.620 (16)	.485 (12)	9.25 (235)	1.16 (30)	205	1.37
FLDT1-052K	2-1002786-1	52 µm	.620 (16)	.485 (12)	9.25 (235)	1.16 (30)	230	.740
FDT1-028K	1001777	28 µm	.650 (17)	.485 (12)	5.51 (140)	1.18 (30)	125	1.37
w/adh-F								

The connector pins on the FDT sensors can be directly soldered to a PCB with a reasonable level of care. This component cannot withstand high temperatures (>80°C) and therefore soldering of the pins to a PCB must be done quickly. A heat sink clamped to the interface area between the film and the crimps will take the heat away from the film. Pre-tin the pins and then quickly solder them to the board. Do not allow the soldering iron to touch the film and do not use a dwell time of more than 5 seconds on the pins. Low temperature solder can also be used.

NORTH AMERICA

Measurement Specialties, Inc., a TE Connectivity Company Tel: +1-800-522-6752 Email: customercare.dtmd@te.com

EUROPE

MEAS Deutschland GmbH a TE Connectivity Company Tel: +49-800-440-5100 Email: customercare.dtmd@te.com

ASIA

Measurement Specialties (China), Ltd., a TE Connectivity Company Tel: +86 0400-820-6015 Email: customercare.chdu@te.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Vibration Sensors category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

D7H-A1 SCA1000-N1000070-004 LDTC-VERTICAL 1005939-1 1005940-1 1007158-1 1767 2-1003744-0 3-1004346-0 1005935-1 1006015-1 2384 1-1002608-0 1-1003745-0 1-1002150-0 1-1002785-1 1-1002786-1 1-1002908-0 1-1004346-0 D7A1 D7A2 VBS040100 VBS061100 VBS062100T SEN-09197 D7S-A0001 1766 4081 PCH420V-M12-HZ SR-3065W VS-JV10A-K03 VS-JV10A VS-JV10A-K02 VS-JV10A-K04 BU-21771-000 BU-23173-000 D6B-2 D7E-1 D7E-2 29132 605-00004 RBS100602 SEN-09196 SEN-09198 VBS040200T 3-1004347-0 LDT1-028K 1-1004347-0 1-1003744-0 1-1004696-0