



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS				
AD	00	REV	LYR	DESCRIPTION	DATE	OWN	APVD	
G				REVISED PER ECO-14-000068	23APR2014	NK	MM	

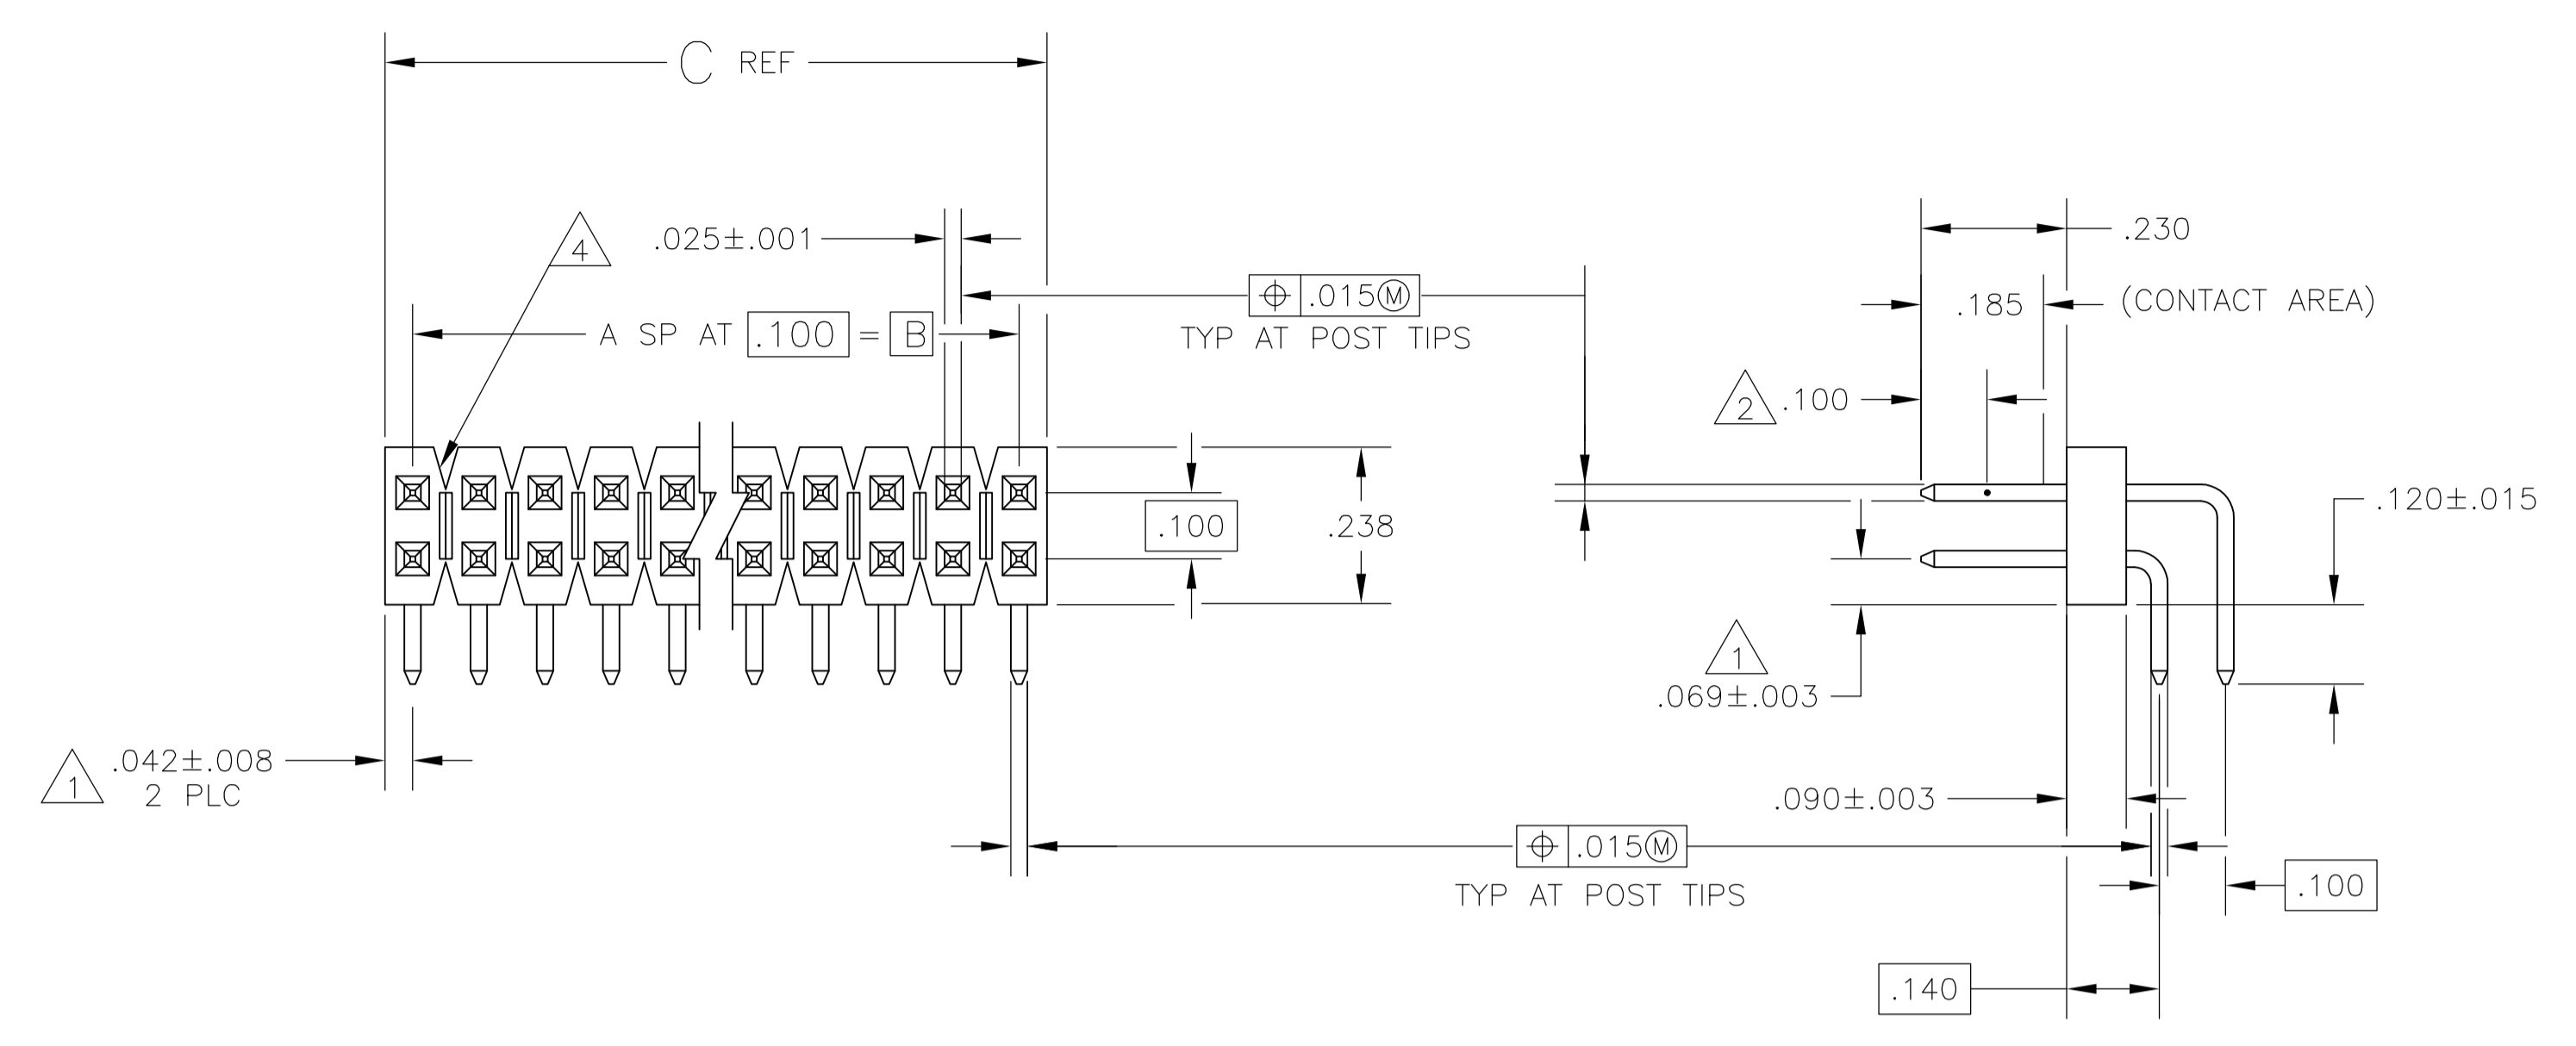

- 1** THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 2** POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 3** ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 4** BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 5** OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

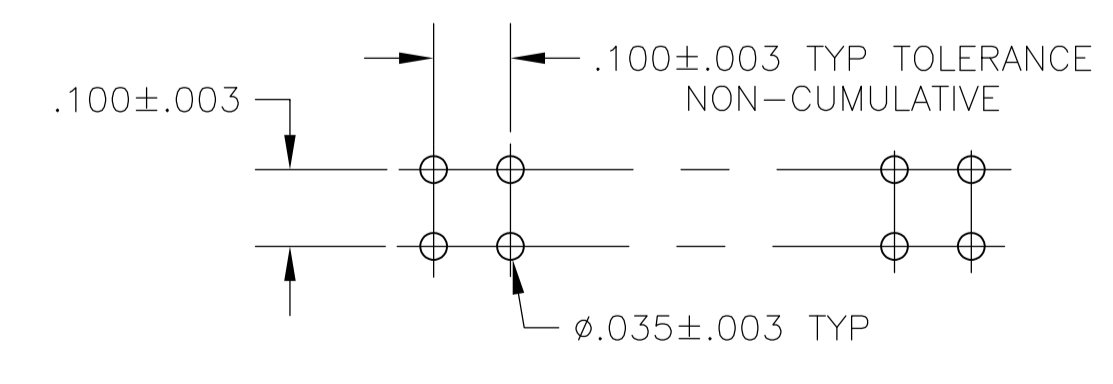

RECOMMENDED HOLE LAYOUT

	3.984	3.900	39	80	4-103149-0
5 OBSOLETE	3.884	3.800	38	78	-3-103149-9
	3.784	3.700	37	76	-3-103149-8
	3.684	3.600	36	74	-3-103149-7
5 SUPERSEDED BY 8-146308-6	3.584	3.500	35	72	-3-103149-6
5 OBSOLETE	3.484	3.400	34	70	-3-103149-5
	3.384	3.300	33	68	-3-103149-4
	3.284	3.200	32	66	-3-103149-3
	3.184	3.100	31	64	-3-103149-2
	3.084	3.000	30	62	-3-103149-1
	2.984	2.900	29	60	-3-103149-0
5 OBSOLETE	2.884	2.800	28	58	-2-103149-9
	2.784	2.700	27	56	-2-103149-8
	2.684	2.600	26	54	-2-103149-7
	2.584	2.500	25	52	-2-103149-6
	2.484	2.400	24	50	-2-103149-5
	2.384	2.300	23	48	-2-103149-4
	2.284	2.200	22	46	-2-103149-3
	2.184	2.100	21	44	-2-103149-2
5 OBSOLETE	2.084	2.000	20	42	-2-103149-1
	1.984	1.900	19	40	-2-103149-0
	1.884	1.800	18	38	-1-103149-9
	1.784	1.700	17	36	-1-103149-8
5 OBSOLETE	1.684	1.600	16	34	-1-103149-7
	1.584	1.500	15	32	-1-103149-6
	1.484	1.400	14	30	-1-103149-5
	1.384	1.300	13	28	-1-103149-4
5 OBSOLETE	1.284	1.200	12	26	-1-103149-3
	1.184	1.100	11	24	-1-103149-2
5 OBSOLETE	1.084	1.000	10	22	-1-103149-1
	.984	.900	9	20	-1-103149-0
5 OBSOLETE	.884	.800	8	18	-103149-9
	.784	.700	7	16	103149-8
	.684	.600	6	14	103149-7
	.584	.500	5	12	103149-6
	.484	.400	4	10	103149-5
5 OBSOLETE	.384	.300	3	8	-103149-4
	.284	.200	2	6	103149-3
5 SUPERSEDED BY 5-146308-2	.184	.100	1	4	-103149-2
5 OBSOLETE	.084	---	---	2	-103149-1

THIS DRAWING IS A CONTROLLED DOCUMENT. **STE** TE Connectivity

DIMENSIONS: INCHES. TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± —, 1 PLC ± —, 2 PLC ± —, 3 PLC ± .005, 4 PLC ± —, ANGLES ± —.

MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK; POST: COPPER ALLOY. FINISH: POST: .00020 GOLD IN THE CONTACT AREA; .00020 .00020 WHITE W/AS PLATED ON THE SOLDER PASTE ALL OVER; .00050 NICKEL.

DIN H. MOLL 23OCT87, CHK T. CLARK 23OCT87, APVD T. CLARK 29OCT87, NAME: HEADER ASSY, MOD II, BREAKAWAY, DOUBLE ROW, .100X.100 G, RIGHT ANGLE, WITH .025 SQ POSTS.

SIZE: A1, CADE CODE: —, DRAWING NO: —, RESTRICTED TO: —, WEIGHT: —, CUSTOMER DRAWING.

SCALE: 4:1, SHEET: 1 OF 1, REV: G.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [79531-3000](#) [FCN-](#)
[360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[801-93-011-10-001000](#)