
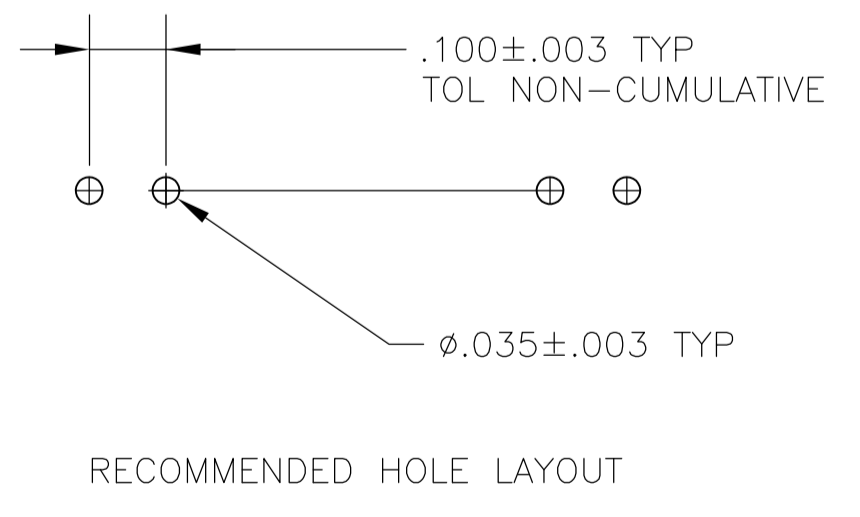


- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD LAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 PARTS PACKAGED IN GPAX
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

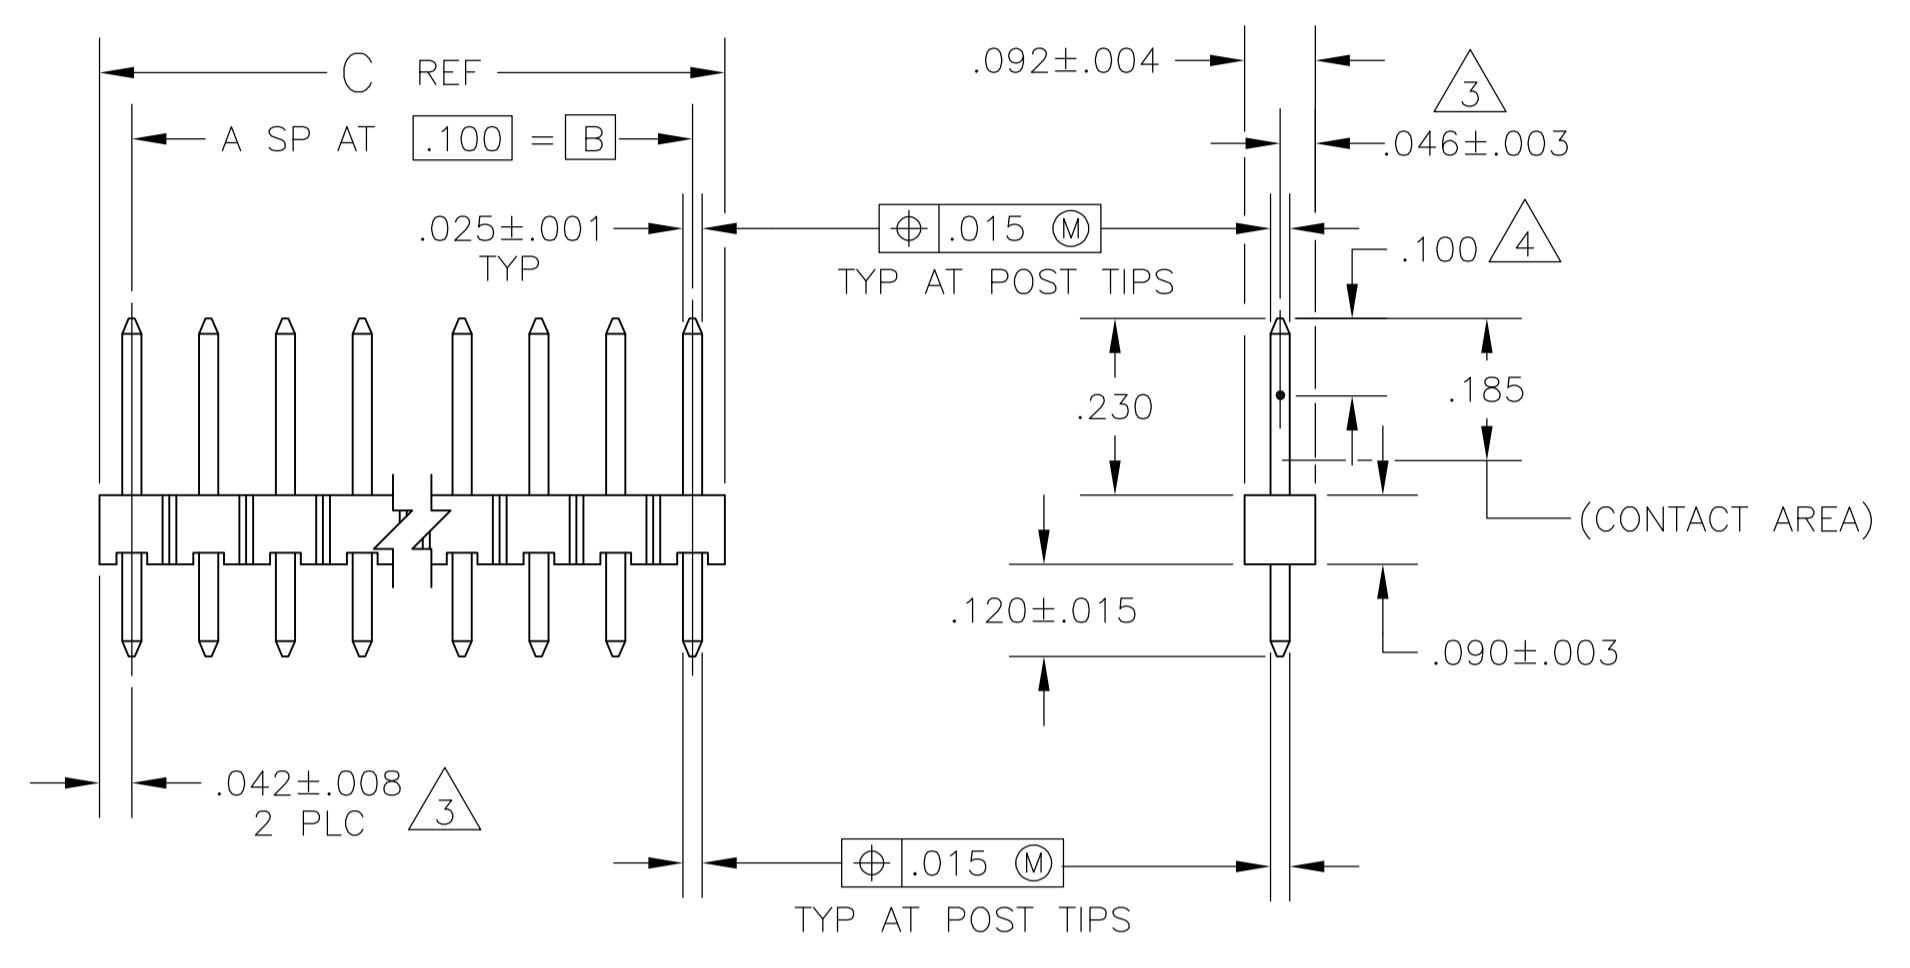

5	6	OBSOLETE	.284	.200	2	3	4-103239-2
			3.984	3.900	39	40	4-103239-0
6	OBSOLETE	3.884	3.800	38	39	3-103239-9	
		3.784	3.700	37	38	3-103239-8	
		3.684	3.600	36	37	3-103239-7	
		3.584	3.500	35	36	3-103239-6	
		3.484	3.400	34	35	3-103239-5	
		3.384	3.300	33	34	3-103239-4	
		3.284	3.200	32	33	3-103239-3	
		3.184	3.100	31	32	3-103239-2	
		3.084	3.000	30	31	3-103239-1	
		2.984	2.900	29	30	3-103239-0	
		2.884	2.800	28	29	2-103239-9	
		2.784	2.700	27	28	2-103239-8	
		2.684	2.600	26	27	2-103239-7	
		2.584	2.500	25	26	2-103239-6	
		2.484	2.400	24	25	2-103239-5	
		2.384	2.300	23	24	2-103239-4	
		2.284	2.200	22	23	2-103239-3	
		2.184	2.100	21	22	2-103239-2	
2.084	2.000	20	21	2-103239-1			
1.984	1.900	19	20	2-103239-0			
6	OBSOLETE	1.884	1.800	18	19	1-103239-9	
		1.784	1.700	17	18	1-103239-8	
		1.684	1.600	16	17	1-103239-7	
		1.584	1.500	15	16	1-103239-6	
		1.484	1.400	14	15	1-103239-5	
6	SUPERSEDED BY 6-146281-3	1.384	1.300	13	14	1-103239-4	
		1.284	1.200	12	13	1-103239-3	
6	OBSOLETE	1.184	1.100	11	12	1-103239-2	
		1.084	1.000	10	11	1-103239-1	
		.984	.900	9	10	1-103239-0	
		.884	.800	8	9	103239-9	
		.784	.700	7	8	103239-8	
		.684	.600	6	7	103239-7	
		.584	.500	5	6	103239-6	
		.484	.400	4	5	103239-5	
		.384	.300	3	4	103239-4	
		.284	.200	2	3	103239-3	
		.184	.100	1	2	103239-2	
		.084	—	—	1	103239-1	
		C	B	A	NO OF POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN H MOLL 13OCT87	CHK T. CLARK 20OCT87	APVD T. CLARK 20OCT87	NAME
0 PLC ± -	1 PLC ± -	2 PLC ± -	3 PLC ± .005	4 PLC ± -	FINISH POSN: .00050 GOLD ON CONTACT AREA, .00010-00005 WHITE TIN LEAD ON SOLDER TAIL, ALL OVER .00050 NICKEL
MATERIAL: HOUSING: FLAME RESISTANT THERMOPLASTIC COLOR: BLACK POSTS: COPPER ALLOY	FINISH POSN: .00050 GOLD ON CONTACT AREA, .00010-00005 WHITE TIN LEAD ON SOLDER TAIL, ALL OVER .00050 NICKEL	WEIGHT: —	SIZE: A1	SCALE: 4:1	SHEET 1 OF 1

RESTRICTED CUSTOMER

STE TE Connectivity

HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100CL, VERTICAL, WITH .025 SQUARE POSTS

00779 © 103239

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)  
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)