


- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- PARTS PACKAGED IN TUBES.
- .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
- .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

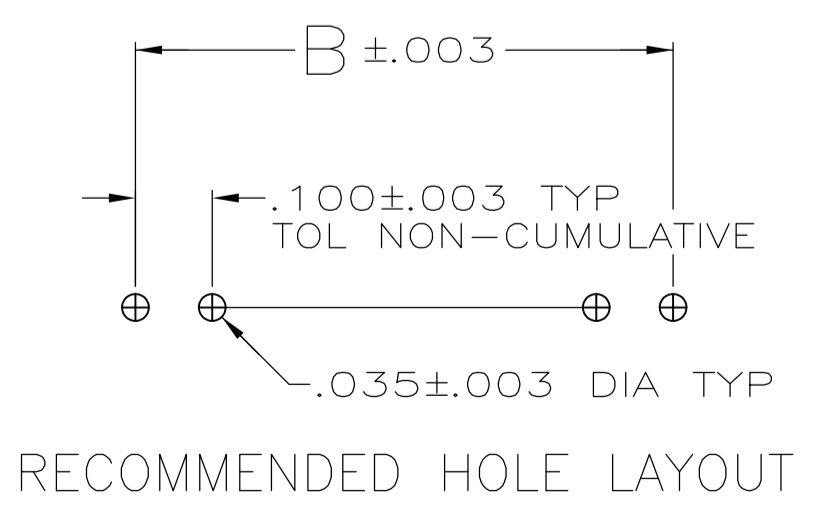

REV	DESCRIPTION	DATE	DWN	APVD		
8	OB	.484	.400	4	5	5-103327-4
7	OB	3.584	3.500	35	36	5-103327-3
6	OB	1.584	1.500	15	16	5-103327-2
5	OB	.384	.300	3	4	5-103327-1
4	OB	1.384	1.300	13	14	5-103327-0
3	OB	3.984	3.900	39	40	4-103327-9
2	OB	.984	.900	9	10	4-103327-8
1	OB	.784	.700	7	8	4-103327-7
		.584	.500	5	6	4-103327-6
		.284	.200	2	3	4-103327-5
		.184	.100	1	2	4-103327-4
		.084	—	—	1	4-103327-3
	SUPERSEDED BY 1-103327-2	1.184	1.100	11	12	4-103327-2
	SUPERSEDED BY 1-103327-1	1.084	1.000	10	11	4-103327-1
		3.984	3.900	39	40	4-103327-0
	OB	3.884	3.800	38	39	3-103327-9
	OB	3.784	3.700	37	38	3-103327-8
	OB	3.684	3.600	36	37	3-103327-7
		3.584	3.500	35	36	3-103327-6
	OB	3.484	3.400	34	35	3-103327-5
	OB	3.384	3.300	33	34	3-103327-4
	OB	3.284	3.200	32	33	3-103327-3
	OB	3.184	3.100	31	32	3-103327-2
	OB	3.084	3.000	30	31	3-103327-1
	OB	2.984	2.900	29	30	3-103327-0
	OB	2.884	2.800	28	29	2-103327-9
	OB	2.784	2.700	27	28	2-103327-8
	OB	2.684	2.600	26	27	2-103327-7
	OB	2.584	2.500	25	26	2-103327-6
	OB	2.484	2.400	24	25	2-103327-5
	OB	2.384	2.300	23	24	2-103327-4
	OB	2.284	2.200	22	23	2-103327-3
	OB	2.184	2.100	21	22	2-103327-2
	OB	2.084	2.000	20	21	2-103327-1
	OB	1.984	1.900	19	20	2-103327-0
	OB	1.884	1.800	18	19	1-103327-9
		1.784	1.700	17	18	1-103327-8
	OB	1.684	1.600	16	17	1-103327-7
		1.584	1.500	15	16	1-103327-6
	OB	1.484	1.400	14	15	1-103327-5
		1.384	1.300	13	14	1-103327-4
	OB	1.284	1.200	12	13	1-103327-3
	SUPERSEDED BY 6-146278-2	1.184	1.100	11	12	1-103327-2
		1.084	1.000	10	11	1-103327-1
		.984	.900	9	10	1-103327-0
	SUPERSEDED BY 5-146278-9	.884	.800	8	9	103327-9
		.784	.700	7	8	103327-8
		.684	.600	6	7	103327-7
		.584	.500	5	6	103327-6
		.484	.400	4	5	103327-5
		.384	.300	3	4	103327-4
		.284	.200	2	3	103327-3
		.184	.100	1	2	103327-2
		.084	—	—	1	103327-1
PLATING	C	B	A	NO OF POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES. TOLERANCES UNLESS OTHERWISE SPECIFIED:

0. PLC	± .005
1. PLC	± .005
2. PLC	± .005
3. PLC	± .005
4. PLC	± .005
ANGLES	± .005

MATERIAL: POST: COPPER ALLOY. FINISH: SEE TABLE.

APPROVED: J. MARTINELLI (10/15/92), JOHN KNITTLE (23NOV92), B. FLINCHBAUGH (23NOV92).

NAME: ASSEMBLY, HEADER, BREAKAWAY, MOD II, SINGLE ROW, .100 C/L, VERTICAL, WITH .025 SQUARE POSTS.

APPLICATION SPEC: —. SIZE: A1. CAGE CODE: 00779. DRAWING NO: 103327. WEIGHT: —. RESTRICTED TO: —.

CUSTOMER DRAWING. SCALE: 4:1. SHEET: 1 OF 1. REV: T.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)