

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - TE Connectivity ALL RIGHTS RESERVED.


ELECTRICAL	MECHANICAL	ENVIRONMENTAL
NOMINAL IMPEDANCE (OHMS) 50 ± 1	Force to Engage (Lbs MAX) 15	TEMPERATURE RATING -65° TO $+165^{\circ}$ C
Frequency Range (GHz) DC to 40	Disengage (Lbs) 5.0 MIN	Vibration MIL-STD-202, Method 204, Condition D
Volt Rating (VRMS MAX) @ Sea Level 335	Center Contact Retention: N/A	Thermal Shock MIL-STD-202, Method 107, Condition B
VSWR: DC to 18 GHz: 1.20 MAX 18 to 26.5 GHz: 1.35 MAX 26.5 to 240 GHz: 1.7 MAX	Cable Retention: Axial: 20 Lbs. Min. Rotational: 16 In. Oz.	Corrosion - MIL-STD-202, Method 101, Condition B
Insertion Loss $.012\sqrt{F}$ GHz (dB min)	Interface per MIL-STD-348A, Figure 326-1a	
Corona, 70,000 Ft (VRMS MIN) 190	DSCC Reference Part Number: 94008ZCG-2	
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 500		
Contact Resistance (Milliohms MAX) Center Contact 6.0 Outer Contact 2.0 Cable to Housing 0.5		
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 325		
I.R.(Megohms MIN) 5,000		

DESIGNED FOR USE WITH
 $\phi.047$ [1.19] SEMI-RIGID CABLE
 CABLE ENTRY DIAMETER MINIMUM

HOUSING	.050 [1.27]
CONTACT	.015 [0.38]

REVISIONS				
P	LTR	DESCRIPTION	DATE	OWN
F		REV PER ECO 17-008740	7-19-17	E

COMPONENT	MATERIAL	FINISH
HOUSING CENTER CONTACT ANTI-ROCK RING EMI RING	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER ASTM-B-488
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A

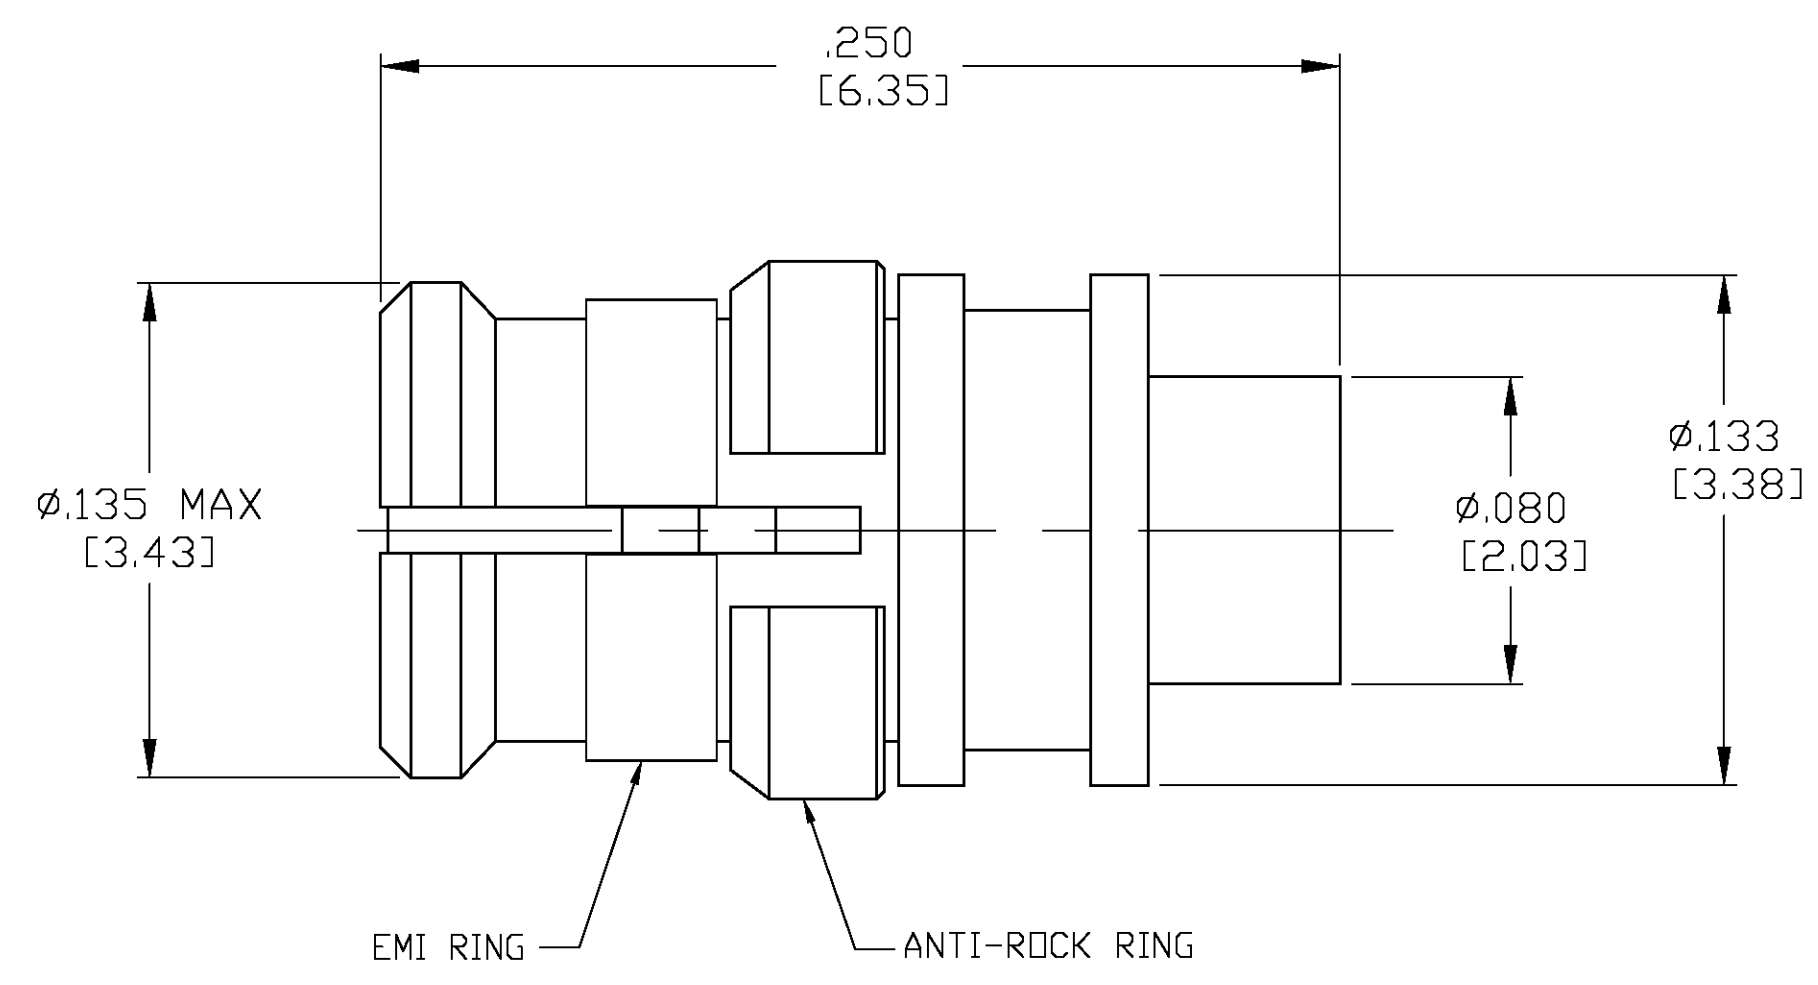

1056521-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 19-APR-05																				
DIMENSIONS: INCHES		CHK R.GROSS 20-APR-05																				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R.GROSS 20-APR-05	NAME OSMP STRAIGHT CABLE JACK DIRECT SOLDER ATTACHMENT																			
<table border="1"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>-</td></tr> <tr><td>3 PLC</td><td>±</td><td>.005 [0.13]</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>-</td></tr> </table>		0 PLC	±	-	1 PLC	±	-	2 PLC	±	-	3 PLC	±	.005 [0.13]	4 PLC	±	-	ANGLES	±	-	PRODUCT SPEC APPLICATION SPEC	SIZE A2	CAGE CODE 00779
0 PLC	±	-																				
1 PLC	±	-																				
2 PLC	±	-																				
3 PLC	±	.005 [0.13]																				
4 PLC	±	-																				
ANGLES	±	-																				
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT 0.000000	DRAWING NO C=1056521	RESTRICTED TO -																		
CUSTOMER DRAWING			SCALE 20:1	SHEET 1 of 1																		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors / Coaxial Connectors](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[R125315120](#) [8915-1511-000](#) [89674-0827](#) [5916-1103-603](#) [6-0001-3](#) [6001-7071-019](#) [6002-7051-003](#) [6002-7551-202](#) [6059674-1](#) [619550-1](#)
[630059-000](#) [M39012/25-0021](#) [M39012/79-3008](#) [M39030/3-01N](#) [M39030/3-03N](#) [M3933/25-36N](#) [6500-7071-046](#) [M83723/72W24576](#)
[M83723/72W2457N](#) [6769](#) [CX050L2AQ](#) [7002-1541-010](#) [7002-1572-002](#) [7003-1572-002](#) [7010-1511-000](#) [7029-1511-060](#) [7101-1541-010](#)
[7101-1571-002](#) [7105-1521-002](#) [7145-1521-002](#) [7209-1511-011](#) [7210-1511-015](#) [7210-1511-019](#) [7225-1512-050](#) [7242-1511-000](#) [73137-5015](#)
[73251-0111](#) [73251-0672](#) [7325-1512-000](#) [73276-1501](#) [73366-0013](#) [73404-2300](#) [73413-6080](#) [73415-5721](#) [7405-1521-005](#) [7405-1521-802](#)
[7406-1521-005](#) [804S01D04M040](#) [8145-1521-002](#) [81590](#)