

Figure 1

1. INTRODUCTION

SMA Hermetically-Sealed Panel Feedthrough Jack Receptacles 1053159-1, 1053181-1, 1053182-1, 1053226-1, 1053227-1, 1053254-1, 1061372-1, and 1089139-1 are designed to be mounted onto a panel using the following tools:

TOOL DESCRIPTION	PART NUMBER CROSS-REFERENCE	
	TE CONNECTIVITY	M/A-COM
Step Reamer	1055284-1	2098-0442-54
.250-36, UNS-2B Bottoming Tap [†]		2098-5618-54
Torque Tool	1055251-1	2098-0248-54
3/8-in. Open Wrench [†]		

[†] Commercially available



Unless otherwise specified, dimensions in this instruction sheet are in metric units [with U.S. customary units in brackets].

Reasons for reissue of this instruction sheet are provided in Section 5, REVISION SUMMARY.

2. DESCRIPTION

The jack receptacle consists of a jack and metal gasket. See Figure 1.

3. ASSEMBLY PROCEDURE



Follow safety precautions included with the tools used for assembly.

- 1. Refer to Figure 2, and drill a hole in the panel to the diameter shown. Using the step reamer, ream the hole to the depth shown. Using the bottoming tap, tap the thread to the depth shown.
- 2. While holding the collet of the torque tool, turn the handle clockwise until it stops. Thread the jack into the tool until it bottoms inside the tool. Hand-tighten the jack. Refer to Figure 3.



The torque tool is preset between 2.60 and 3.05 Nm [23 and 27 in.-lb].

Recommended Panel Cutout

Note: Dimensions are in inches over millimeters.




Figure 2

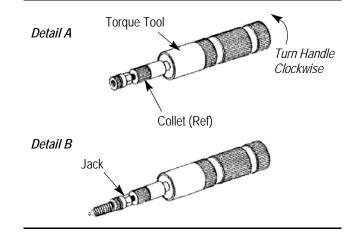


Figure 3

3. Install the metal gasket onto the jack. See Figure 4.





Figure 4



- 4. Thread the jack into the connector housing by turning the handle of the torque tool clockwise until the handle releases. See Figure 5, Detail A.
- 5. While holding the collet of the torque tool with the open wrench, turn the handle counter- clockwise, and remove the jack assembly from the torque tool. See Figure 5, Detail B.
- 6. Install the jack assembly onto the panel.






Figure 5

4. REPLACEMENT AND REPAIR

Discard and replace any defective or damaged jack receptacles or metal gaskets.

5. REVISION SUMMARY

Since the previous version of this document, the following changes were made:

Updated document to corporate requirements.

Rev B 2 of 2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Connectors / Coaxial Connectors category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

R125315120 8915-1511-000 89674-0827 5916-1103-603 0106-001-000 6-0001-3 6001-7071-019 6002-7051-003 6002-7551-202 6059674
1 619550-1 630059-000 M39012/25-0021 M39012/79-3008 M39030/3-01N M39030/3-03N M3933/25-29N M3933/25-36N 6500-7071-046

6501-1071-002 M83723/72W24576 M83723/72W2457N 6769 CX050L2AQ 7002-1541-010 7002-1572-002 7003-1572-002 7004-1512
000 7009-1511-004 7010-1511-000 7029-1511-060 7101-1541-010 7101-1571-002 7105-1521-002 7145-1521-002 7209-1511-011 7210
1511-012 7210-1511-015 7210-1511-019 7210-1511-040 7225-1512-050 7242-1511-000 73137-5015 73251-0111 73251-0672 73276-1501

73366-0013 73404-2300 73413-6080 734151610