


LOC		DIST		REVISIONS					
AD		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
				R2		REVISED PER ECO-11-004820	11MAR11	RK	HMR

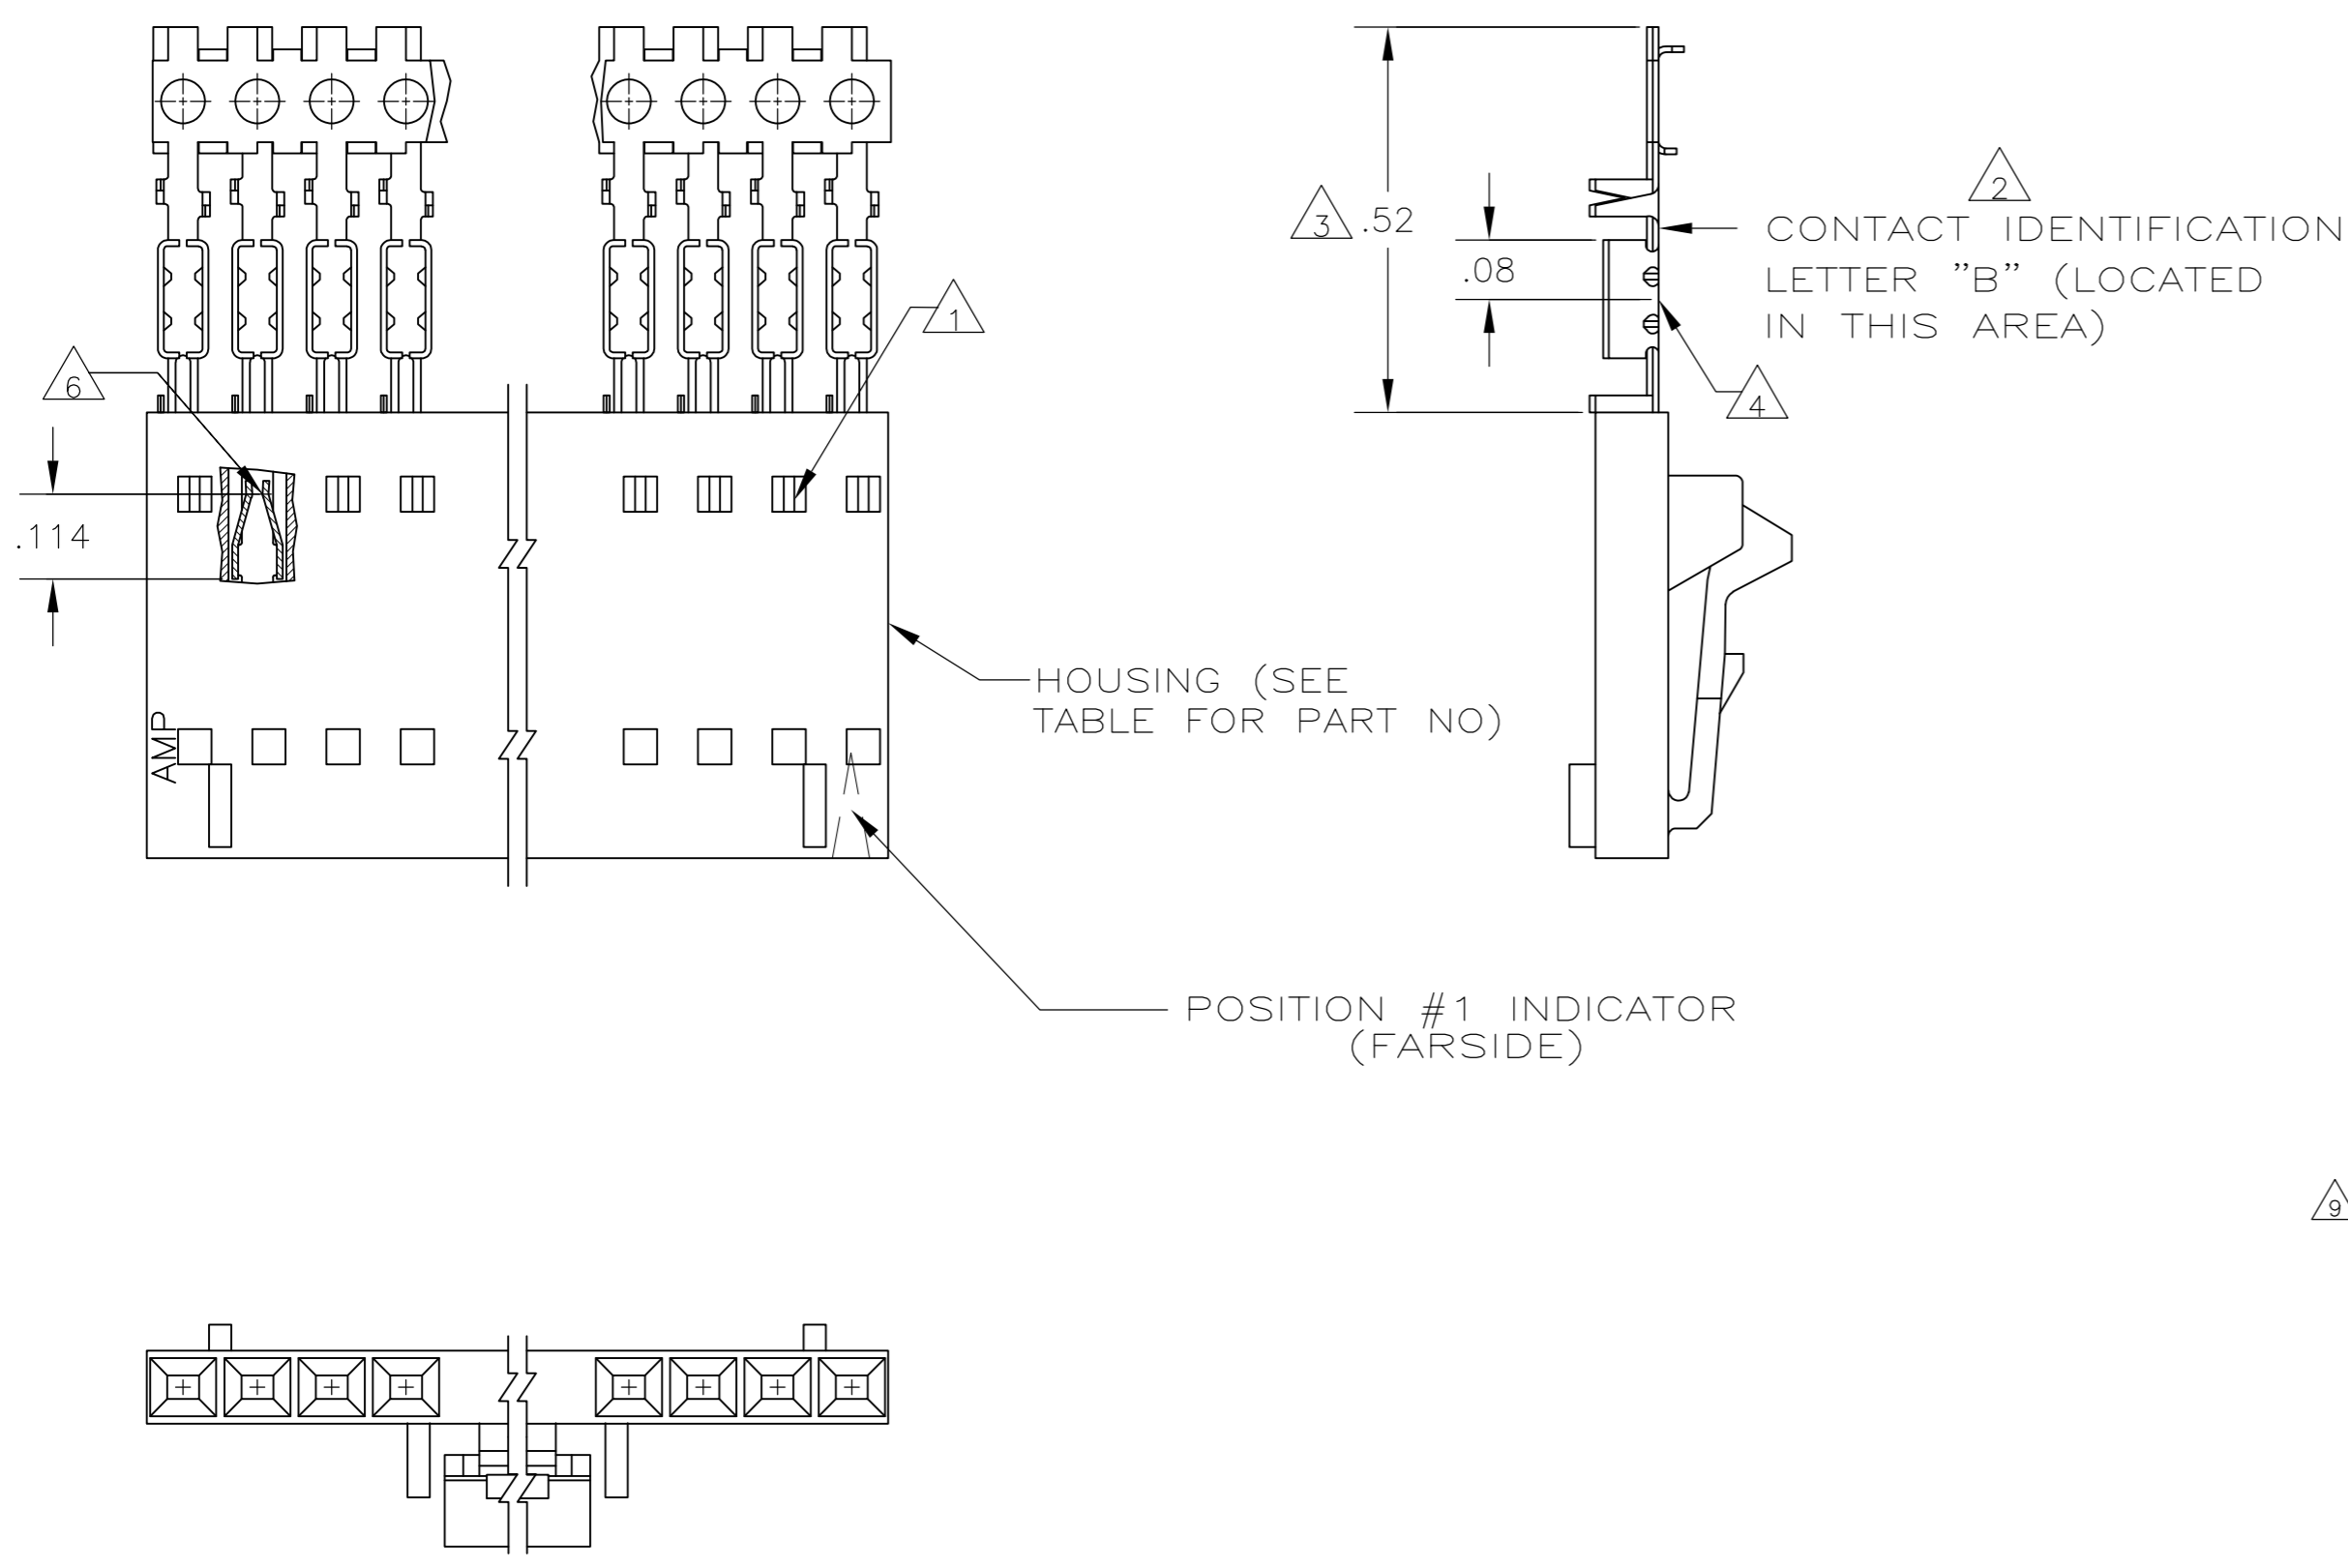

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103957
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 7 FINISH: CONTACTS: .000015 GOLD IN THE CONTACT AREA,.000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 8 .000015 GOLD IN THE CONTACT AREA,.000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

9	8	7	6	5	4	3	2	1
OBSOLETE	8	2-104257-4	25	7-103644-4				
OBSOLETE	8	2-104257-3	24	7-103644-3				
OBSOLETE	8	2-104257-2	23	7-103644-2				
OBSOLETE	8	2-104257-1	22	7-103644-1				
	8	2-104257-0	21	7-103644-0				
OBSOLETE	8	1-104257-9	20	6-103644-9				
OBSOLETE	8	1-104257-8	19	6-103644-8				
OBSOLETE	8	1-104257-7	18	6-103644-7				
OBSOLETE	8	1-104257-6	17	6-103644-6				
OBSOLETE	8	1-104257-5	16	6-103644-5				
OBSOLETE	8	1-104257-4	15	6-103644-4				
	8	1-104257-3	14	6-103644-3				
	8	1-104257-2	13	6-103644-2				
	7	2-104257-4	25	2-103644-4				
OBSOLETE	7	2-104257-3	24	2-103644-3				
OBSOLETE	7	2-104257-2	23	2-103644-2				
OBSOLETE	7	2-104257-1	22	2-103644-1				
SUPERSEDED BY 7-103644-0	7	2-104257-0	21	2-103644-0				
	7	1-104257-9	20	1-103644-9				
OBSOLETE	7	1-104257-8	19	1-103644-8				
	7	1-104257-7	18	1-103644-7				
	7	1-104257-6	17	1-103644-6				
	7	1-104257-5	16	1-103644-5				
	7	1-104257-4	15	1-103644-4				
	7	1-104257-3	14	1-103644-3				
	7	1-104257-2	13	1-103644-2				
SUPERSEDED BY 1-103957-1		1-104257-1	12	1-103644-1				
SUPERSEDED BY 1-103957-0		1-104257-0	11	1-103644-0				
SUPERSEDED BY 103957-9		104257-9	10	103644-9				
SUPERSEDED BY 103957-8		104257-8	9	103644-8				
SUPERSEDED BY 103957-7		104257-7	8	103644-7				
SUPERSEDED BY 103957-6		104257-6	7	103644-6				
SUPERSEDED BY 103957-5		104257-5	6	103644-5				
SUPERSEDED BY 103957-4		104257-4	5	103644-4				
SUPERSEDED BY 103957-3		104257-3	4	103644-3				
SUPERSEDED BY 103957-2		104257-2	3	103644-2				
SUPERSEDED BY 103957-1		104257-1	2	103644-1				

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	L A MAYER	11-4-86		TE Connectivity		
DIMENSIONS: INCHES		CHK	P de Jong	11-12-86		RCPT ASSY, AMPMODU MTE, SINGLE ROW,.100 C/L LATCHED AND POLARIZED, FOR NO 22- NO 26 AWG WIRE SIZE		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	-	-		SIZE	CAGE CODE	DRAWING NO
0 PLC ± -		PRODUCT SPEC		108-25034	A2	00779	C=103644	
1 PLC ± -		APPLICATION SPEC		114-25026	RESTRICTED TO			
2 PLC ± .02		WEIGHT		-	SCALE 4:1 SHEET 1 of 1 REV R2			
3 PLC ± .005		CUSTOMER DRAWING						
4 PLC ± -		FINISH		SEE TABLE				
ANGLES ± -		MATERIAL		HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [79531-3000](#) [FCN-](#)
[360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[801-93-011-10-001000](#)