
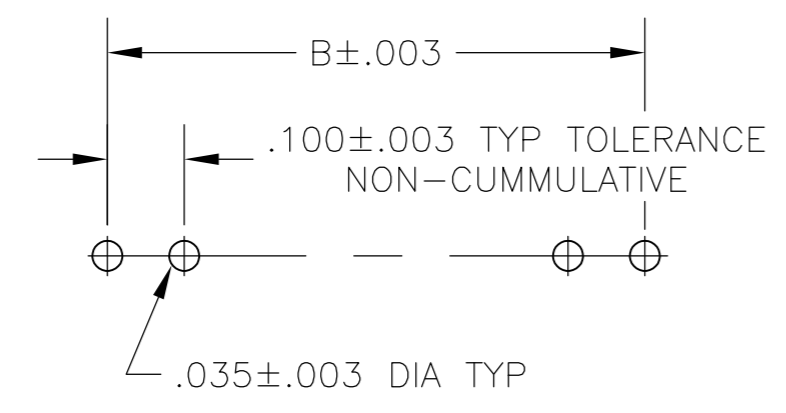


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS				
AD	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		J		REVISED PER ECO-14-000068		28APR2014	NK	MM

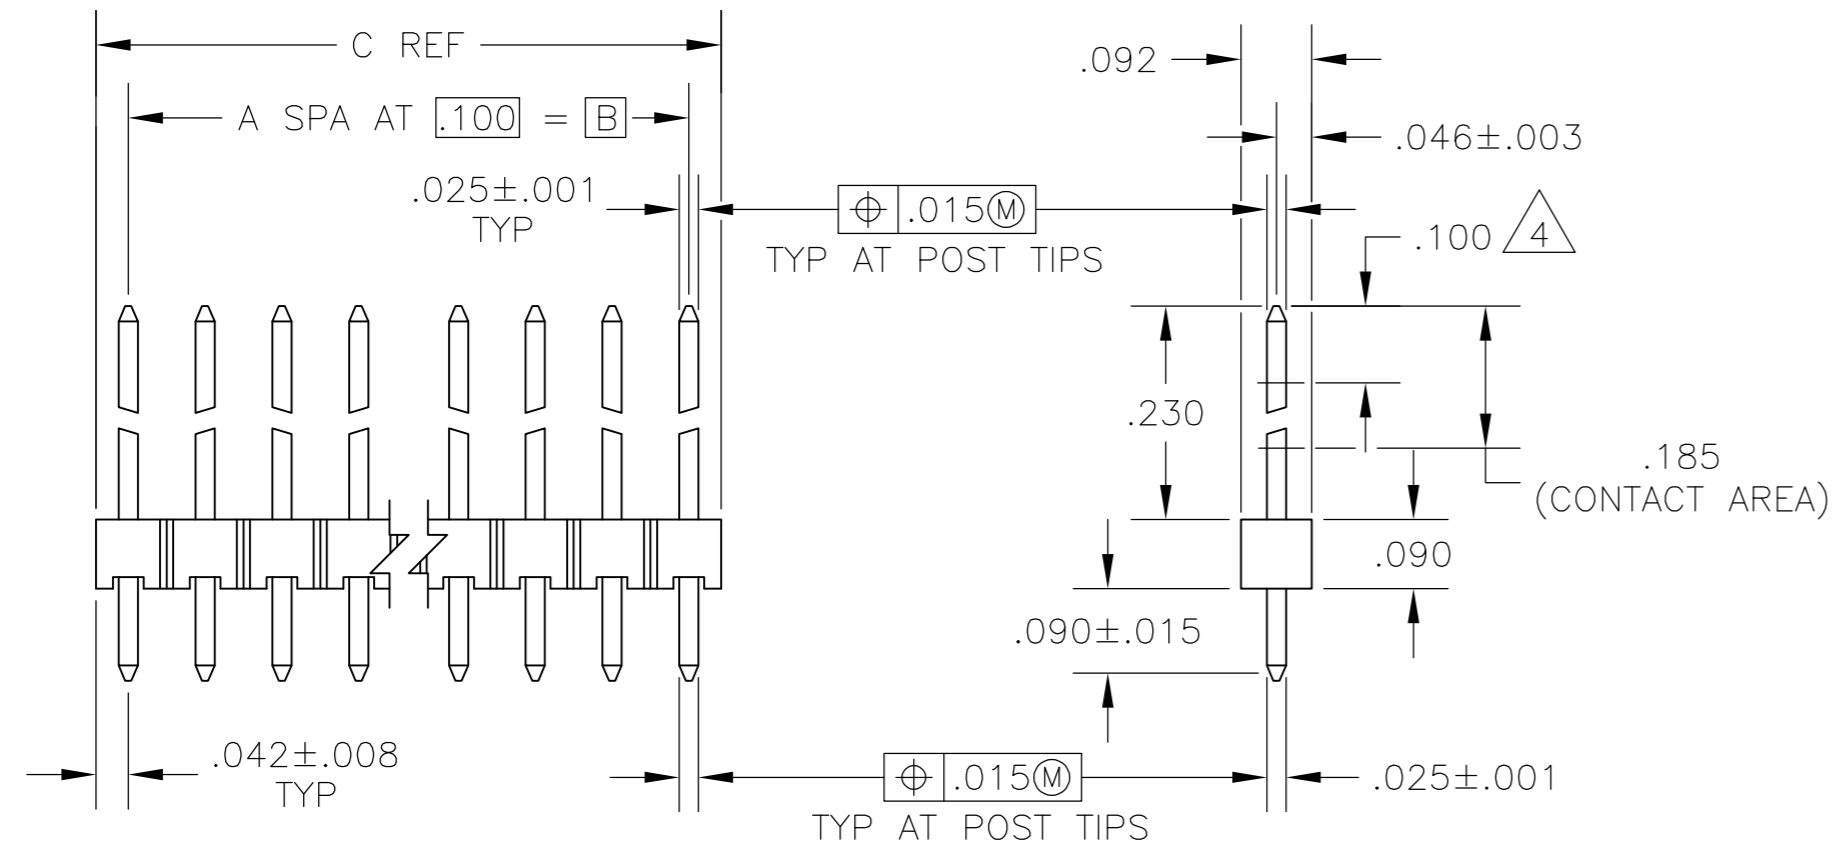

RECOMMENDED HOLE LAYOUT

- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 2 ASSEMBLIES MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 3 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 4 .000030 GOLD ON THE CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON THE SOLDER TAIL, ALL OVER .000050 NICKEL
- 5 PARTS PACKAGED IN SINGLE TUBES.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

6	5	OBSOLETE	.184	.100	1	2	4-103747-1
			3.984	3.900	39	40	4-103747-0
		6	3.884	3.800	38	39	3-9
		OBSOLETE	3.784	3.700	37	38	3-8
			3.684	3.600	36	37	3-7
6	SUPERCEDED BY 6-146285-3		3.584	3.500	35	36	3-6
			3.484	3.400	34	35	3-5
			3.284	3.300	33	34	3-4
			3.284	3.200	32	33	3-3
			3.184	3.100	31	32	3-2
		6	3.084	3.000	30	31	3-1
		OBSOLETE	2.984	2.900	29	30	3-0
			2.884	2.800	28	29	2-9
			2.784	2.700	27	28	2-8
			2.684	2.600	26	27	2-7
			2.584	2.500	25	26	2-6
			2.484	2.400	24	25	2-5
			2.384	2.300	23	24	2-4
			2.284	2.200	22	23	2-3
			2.184	2.100	21	22	2-2
			2.084	2.000	20	21	2-1
			1.984	1.900	19	20	2-0
		6	1.884	1.800	18	19	1-9
		OBSOLETE	1.784	1.700	17	18	1-8
			1.684	1.600	16	17	1-7
			1.584	1.500	15	16	1-6
		6	1.484	1.400	14	15	1-5
		OBSOLETE	1.384	1.300	13	14	1-4
6	SUPERCEDED BY 6-146285-3		1.284	1.200	12	13	1-3
			1.184	1.100	11	12	1-2
		6	1.084	1.000	10	11	1-1
		OBSOLETE	.984	.900	9	10	1-0
			.884	.800	8	9	-9
			.784	.700	7	8	-8
			.684	.600	6	7	-7
			.584	.500	5	6	-6
			.484	.400	4	5	-5
			.384	.300	3	4	-4
			.284	.200	2	3	-3
			.184	.100	1	2	-2
			.084	-	-	1	103747-1
			C	B	A	NO OF POS	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	7-24-85	TE Connectivity			
DIMENSIONS: INCHES		CHK	7-24-85				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	7-24-85	NAME			
0 PLC ± -		R.FLICKER		ASSEMBLY, MOD II, HEADER, BREAKAWAY, SINGLE ROW, .100 CL VERTICAL, WITH .025 SQ POSTS			
1 PLC ± -		R.FLICKER		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ± -		R.FLICKER		A2	00779	C=103747	-
3 PLC ± .005		PRODUCT SPEC		SCALE 4:1 SHEET 1 of 1 REV J			
4 PLC ± -		APPLICATION SPEC		CUSTOMER DRAWING			
4 ANGLES ± -		FINISH		POSTS 4			
MATERIAL: HOUSING-FLAME RETARDANT THERMOPLASTIC COLOR-BLACK POSTS: COPPER ALLOY		WEIGHT					

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009508121](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [68002-116](#) [68016-236H](#) [68648-049](#)