
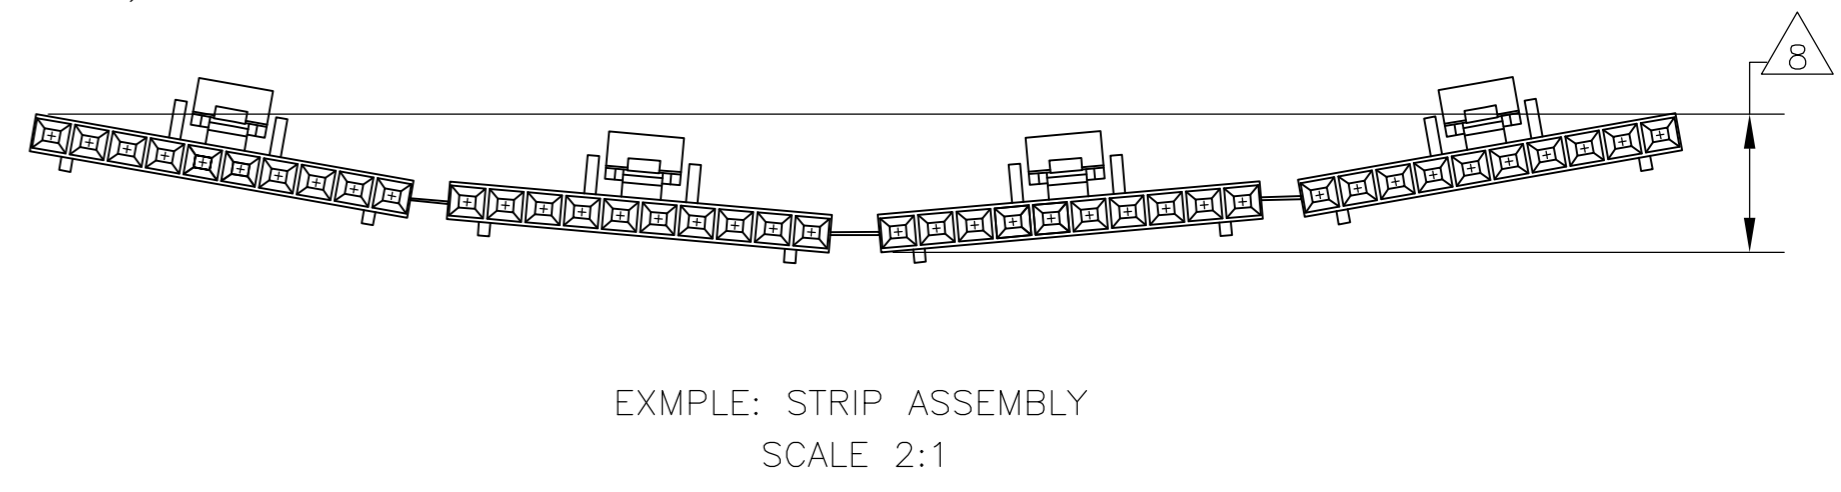


LOC		DIST		REVISIONS			
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		P1		REVISED PER ECO-11-004587	11MAR11	RK	HMR

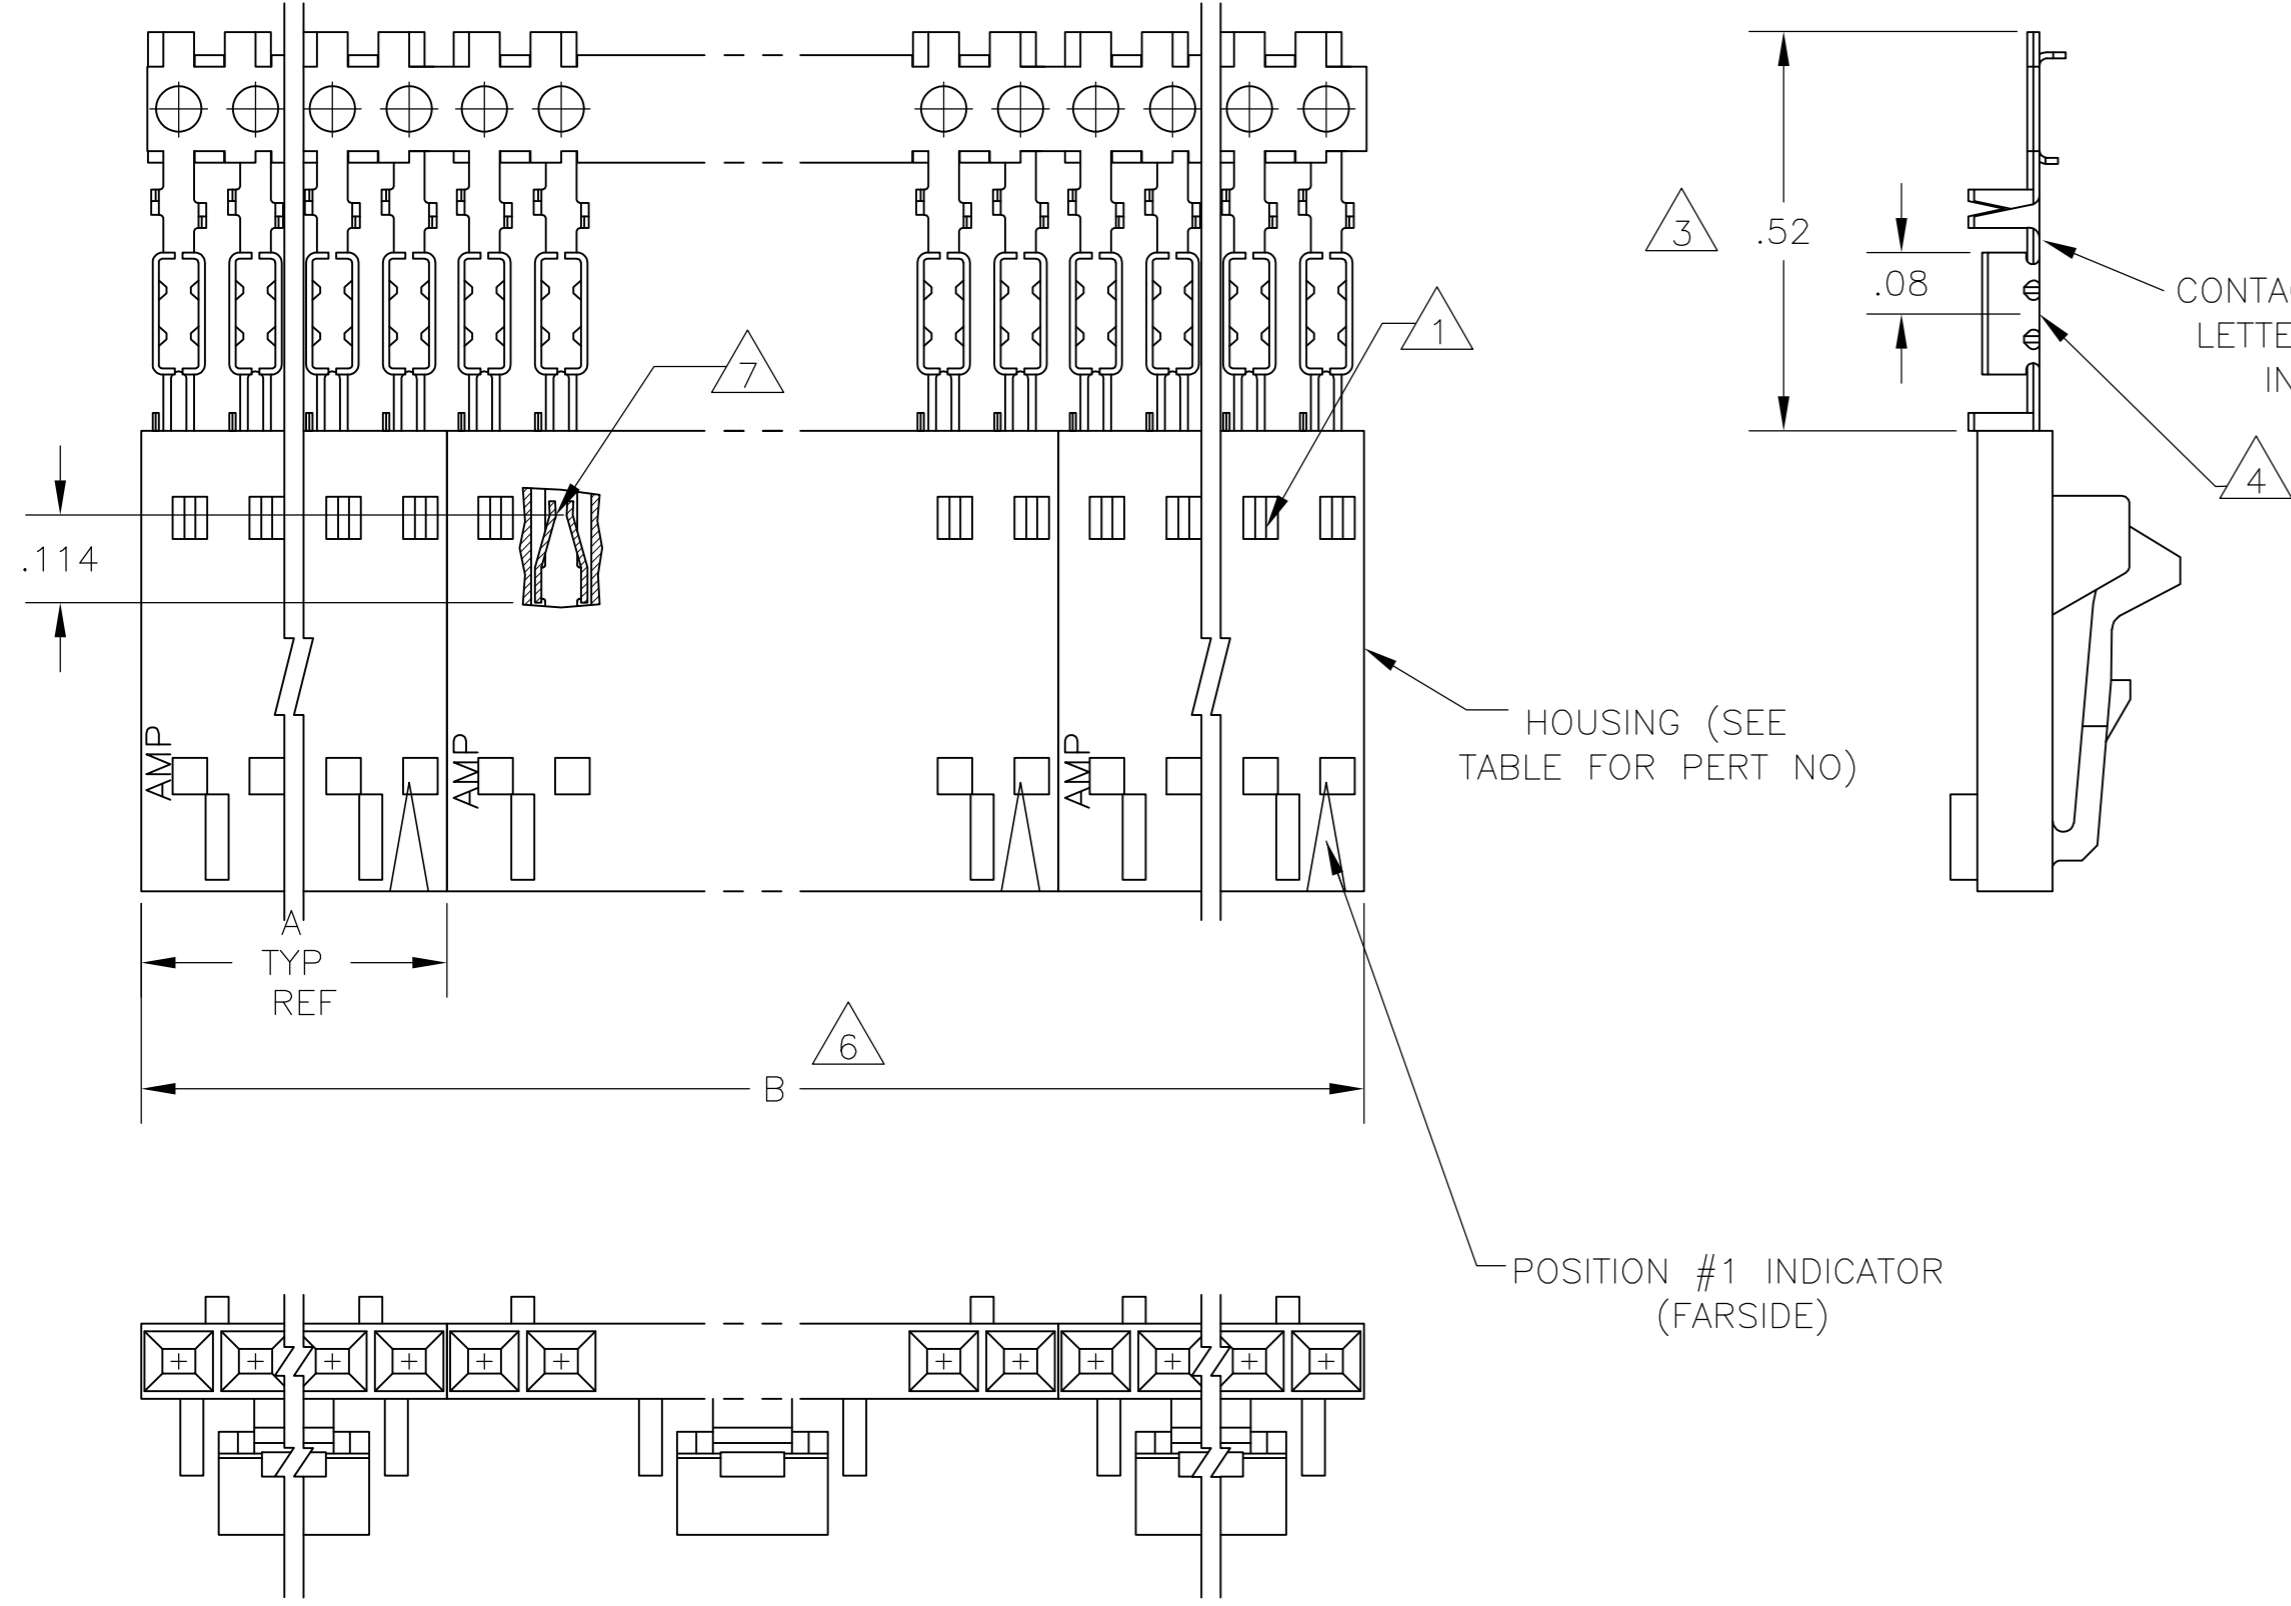

△12	2	2.40	1.198	1-104257-1	12	6-103958-1
△12	2	2.20	1.098	1-104257-0	11	6-103958-0
△12	2	2.00	.998	104257-9	10	5-103958-9
△12	2	1.80	.898	104257-8	9	5-103958-8
△12	2	1.60	.798	104257-7	8	5-103958-7
△12	2	1.40	.698	104257-6	7	5-103958-6
△12	4	2.39	.598	104257-5	6	5-103958-5
△12	4	1.99	.498	104257-4	5	5-103958-4
△12	5	1.99	.398	104257-3	4	5-103958-3
△12	8	2.40	.298	104257-2	3	5-103958-2
△12	10	2.00	.198	104257-1	2	5-103958-1
△10	2	1.60	.798	104257-7	8	1-103958-6
△10	4	1.99	.498	104257-4	5	1-103958-5
△10	5	1.99	.398	104257-3	4	1-103958-4
△10	8	2.40	.298	104257-2	3	1-103958-3
△10	10	2.00	.198	104257-1	2	1-103958-2
△9	2	2.40	1.198	1-104257-1	12	1-103958-1
△9	2	2.20	1.098	1-104257-0	11	1-103958-0
△9	2	2.00	.998	104257-9	10	103958-9
△9	2	1.80	.898	104257-8	9	103958-8
△9	2	1.60	.798	104257-7	8	103958-7
△9	2	1.40	.698	104257-6	7	103958-6
△9	4	2.39	.598	104257-5	6	103958-5
△9	4	1.99	.498	104257-4	5	103958-4
△9	5	1.99	.398	104257-3	4	103958-3
△9	8	2.40	.298	104257-2	3	103958-2
△9	10	2.00	.198	104257-1	2	103958-1
PLATING	△6	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

- △1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- △2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- △3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- △4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103734
- △6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- △7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- △8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- △9 .000030 GOLD IN THE CONTACT AREA. .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- △10 .000030 GOLD IN THE CONTACT AREA. .000050-.000100 BRIGHT TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL.
- △11 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- △12 .000030 GOLD IN THE CONTACT AREA, .000050 - .000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN 11-4-86 L A MAYER	CHK 11-12-86 P de Jong	APVD 11-12-86 P de Jong	NAME
	0 PLC ± - 1 PLC ± - 2 PLC ± .02 3 PLC ± .005 4 PLC ± - ANGLES ± - FINISH	108-25034			RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 C/L, LATCHED & POLARIZED, FOR NO 22-NO 26 AWG WIRE SIZE, STRIP FORM
MATERIAL HOUSING: SEE TABLE		114-25026	SIZE A2	CAGE CODE 00779	DRAWING NO C=103958
		CUSTOMER DRAWING	SCALE 4:1	SHEET 1 of 1	REV P1

TE Connectivity

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)