


- 1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 2 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
- 3 RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- 4 THE NOTED PART IS TO BE PACKAGED IN SINGLE TUBES.
- 5 $\text{M} \ .020$ FOR KINKED TAILS.
- 6 .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
- 7 .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

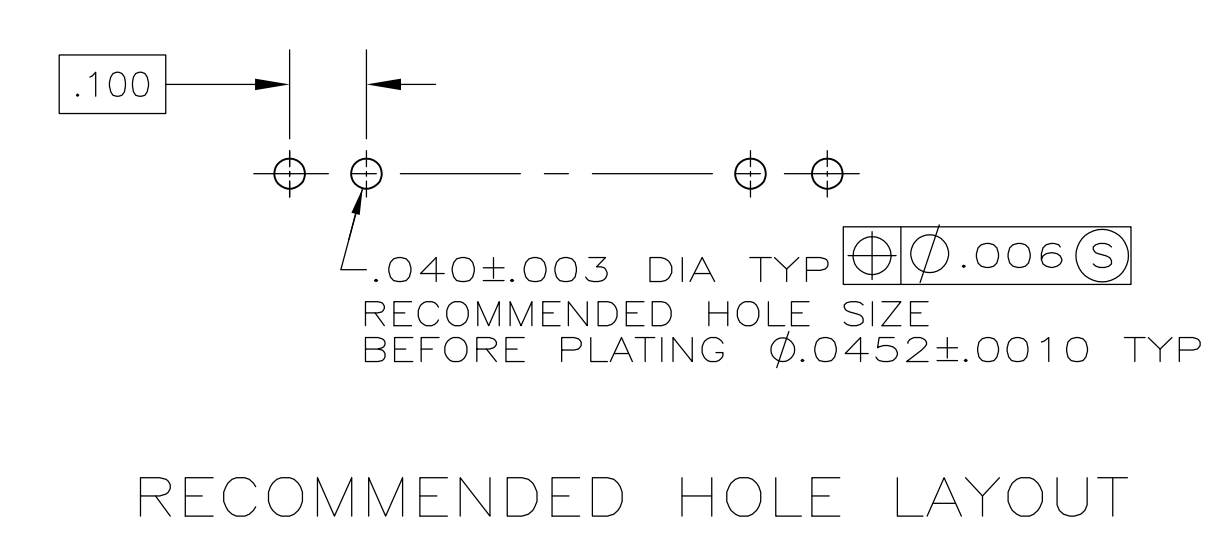

| PLATING | REMARKS | C | B | A | NO OF POSN | ASSEMBLY PART NUMBER |
|------------------------|---------|---|-------|-------|------------|----------------------|
| SUPERSEDED BY 104428-1 | | | | | | |
| | | | .284 | .200 | 2 | 3 2-104428-8 |
| | | | 3.984 | 3.900 | 39 | 40 2-104428-7 |
| | | | 3.484 | 3.400 | 34 | 35 2-104428-6 |
| | | | 2.984 | 2.900 | 29 | 30 2-104428-5 |
| | | | 2.584 | 2.500 | 25 | 26 2-104428-4 |
| | | | 2.484 | 2.400 | 24 | 25 2-104428-3 |
| OBSOLETE | | | 2.384 | 2.300 | 23 | 24 2-104428-2 |
| | | | 2.284 | 2.200 | 22 | 23 2-104428-1 |
| | | | 2.184 | 2.100 | 21 | 22 2-104428-0 |
| | | | 2.084 | 2.000 | 20 | 21 1-104428-9 |
| | | | 1.984 | 1.900 | 19 | 20 1-104428-8 |
| | | | 1.884 | 1.800 | 18 | 19 1-104428-7 |
| | | | 1.784 | 1.700 | 17 | 18 1-104428-6 |
| | | | 1.684 | 1.600 | 16 | 17 1-104428-5 |
| | | | 1.584 | 1.500 | 15 | 16 1-104428-4 |
| | | | 1.484 | 1.400 | 14 | 15 1-104428-3 |
| OBSOLETE | | | 1.384 | 1.300 | 13 | 14 1-104428-2 |
| | | | 1.284 | 1.200 | 12 | 13 1-104428-1 |
| | | | 1.184 | 1.100 | 11 | 12 1-104428-0 |
| | | | 1.084 | 1.000 | 10 | 11 104428-9 |
| | | | .984 | .900 | 9 | 10 104428-8 |
| | | | .884 | .800 | 8 | 9 104428-7 |
| | | | .784 | .700 | 7 | 8 104428-6 |
| OBSOLETE | | | .684 | .600 | 6 | 7 104428-5 |
| | | | .584 | .500 | 5 | 6 104428-4 |
| OBSOLETE | | | .484 | .400 | 4 | 5 104428-3 |
| | | | .384 | .300 | 3 | 4 104428-2 |
| | | | .284 | .200 | 2 | 3 104428-1 |

| | | | | | |
|--------------------------------------------------------------------------------|--|----------------------------------------|--|--------------------------------------------------------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DIN H MOLL 6-28-88 | | TE Connectivity | |
| DIMENSIONS: INCHES | | TOLERANCES UNLESS OTHERWISE SPECIFIED: | | | |
| 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± - | | R FEIDT 6-28-88 W PARKER 6-28-88 | | NAME: HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100 CL, VERT, .025 SQ | |
| MATERIAL: HOUSING: FLAME; POST: COPPER ALLOY | | FINISH: SEE TABLE | | WEIGHT: --- SIZE: A1 CUSTOMER DRAWING | |
| DRAWING NO: 100779 DRAWING NO: 104428 | | | | SCALE: 4:1 SHEET: 1 of 1 REV: P | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)