


- 1 0.00076 [.000030] GOLD IN LOCALIZED PLATE AREA
0.00381 [.000150] TIN-LEAD ON SOLDER TAILS
ALL OVER 0.00127 [.000050] NICKEL
- 2 USE 1.32±0.02 [.0520±.0010] DRILLED HOLE (#55 DRILL)
FINISH TO BE TIN/LEAD OVER 0.02 [.001] MIN COPPER
- 3 PLATING: 0.0038 [.000150] TIN-LEAD OVER 0.00127 [.000050] NICKEL
- 4 IF PLANNING TO USE MORE THAN ONE MATING PAIR OF CONNECTORS
TO INTERCONNECT 2 BOARDS, PLEASE REFER TO "SPACING"
PARAGRAPH IN THE APPLICATION SPEC, #114-7010
- 5 HOUSING: LCP, COLOR:BLACK.
CONTACT: COPPER ALLOY PER ASTM SPECIFICATION B422.
HOLDDOWN: COPPER ALLOY PER ASTM SPECIFICATION B194.
- 6 0.00076 [.000030] GOLD IN LOCALIZED PLATE AREA
0.00381 [.000150] TIN ON SOLDER TAILS
ALL OVER 0.00127 [.000050] NICKEL
- 7 USE 1.32±0.02 [.0520±.0010] DRILLED HOLE (#55 DRILL)
FINISH TO BE TIN OVER 0.02 [.001] MIN COPPER
- 8 PLATING: 0.0038 [.000150] TIN OVER 0.00127 [.000050] NICKEL
- 9 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.

6/8	11.93	5.97	14.63	10.56	7	16	6-104652-1
6/8	65.28	32.640	67.97	63.91	49	100	6-104652-0
6/8	58.93	29.46	61.62	57.56	44	90	5-104652-9
6/8	2.320	1.160	2.426	2.266	39	80	5-104652-8
6/8	52.58	26.290	55.27	51.21	34	70	5-104652-7
6/8	2.070	1.035	2.176	2.016	29	60	5-104652-6
6/8	46.23	23.11	48.92	44.86	24	50	5-104652-5
6/8	1.820	.910	1.926	1.766	19	40	5-104652-4
6/8	39.88	19.940	42.57	38.51	14	30	5-104652-3
6/8	1.570	.785	1.676	1.516	9	20	5-104652-2
6/8	33.53	16.76	36.22	32.16	4	10	5-104652-1
6/8	1.320	.660	1.426	1.266			
6/8	27.18	13.590	29.87	25.81			
6/8	1.070	.535	1.176	1.016			
6/8	20.83	10.41	23.52	19.46			
6/8	.820	.410	.926	.766			
6/8	14.48	7.240	17.17	13.11			
6/8	.570	.285	.676	.516			
6/8	8.12	4.06	10.82	6.75			
6/8	.320	.160	.426	.266			
1/3	11.93	5.97	14.63	10.56	7	16	1-104652-1
1/3	65.28	32.640	67.97	63.91	49	100	1-104652-0
1/3	58.93	29.46	61.62	57.56	44	90	104652-9
1/3	2.320	1.160	2.426	2.266	39	80	104652-8
1/3	52.58	26.290	55.27	51.21	34	70	104652-7
1/3	2.070	1.035	2.176	2.016	29	60	104652-6
1/3	46.23	23.11	48.92	44.86	24	50	104652-5
1/3	1.820	.910	1.926	1.766	19	40	104652-4
1/3	39.88	19.940	42.57	38.51	14	30	104652-3
1/3	1.570	.785	1.676	1.516	9	20	104652-2
1/3	33.53	16.76	36.22	32.16	4	10	104652-1
1/3	1.320	.660	1.426	1.266			
1/3	27.18	13.590	29.87	25.81			
1/3	1.070	.535	1.176	1.016			
1/3	20.83	10.41	23.52	19.46			
1/3	.820	.410	.926	.766			
1/3	14.48	7.240	17.17	13.11			
1/3	.570	.285	.676	.516			
1/3	8.12	4.06	10.82	6.75			
1/3	.320	.160	.426	.266			
FINISH	E	D	C	B	A	NO OF POS	PART NUMBER

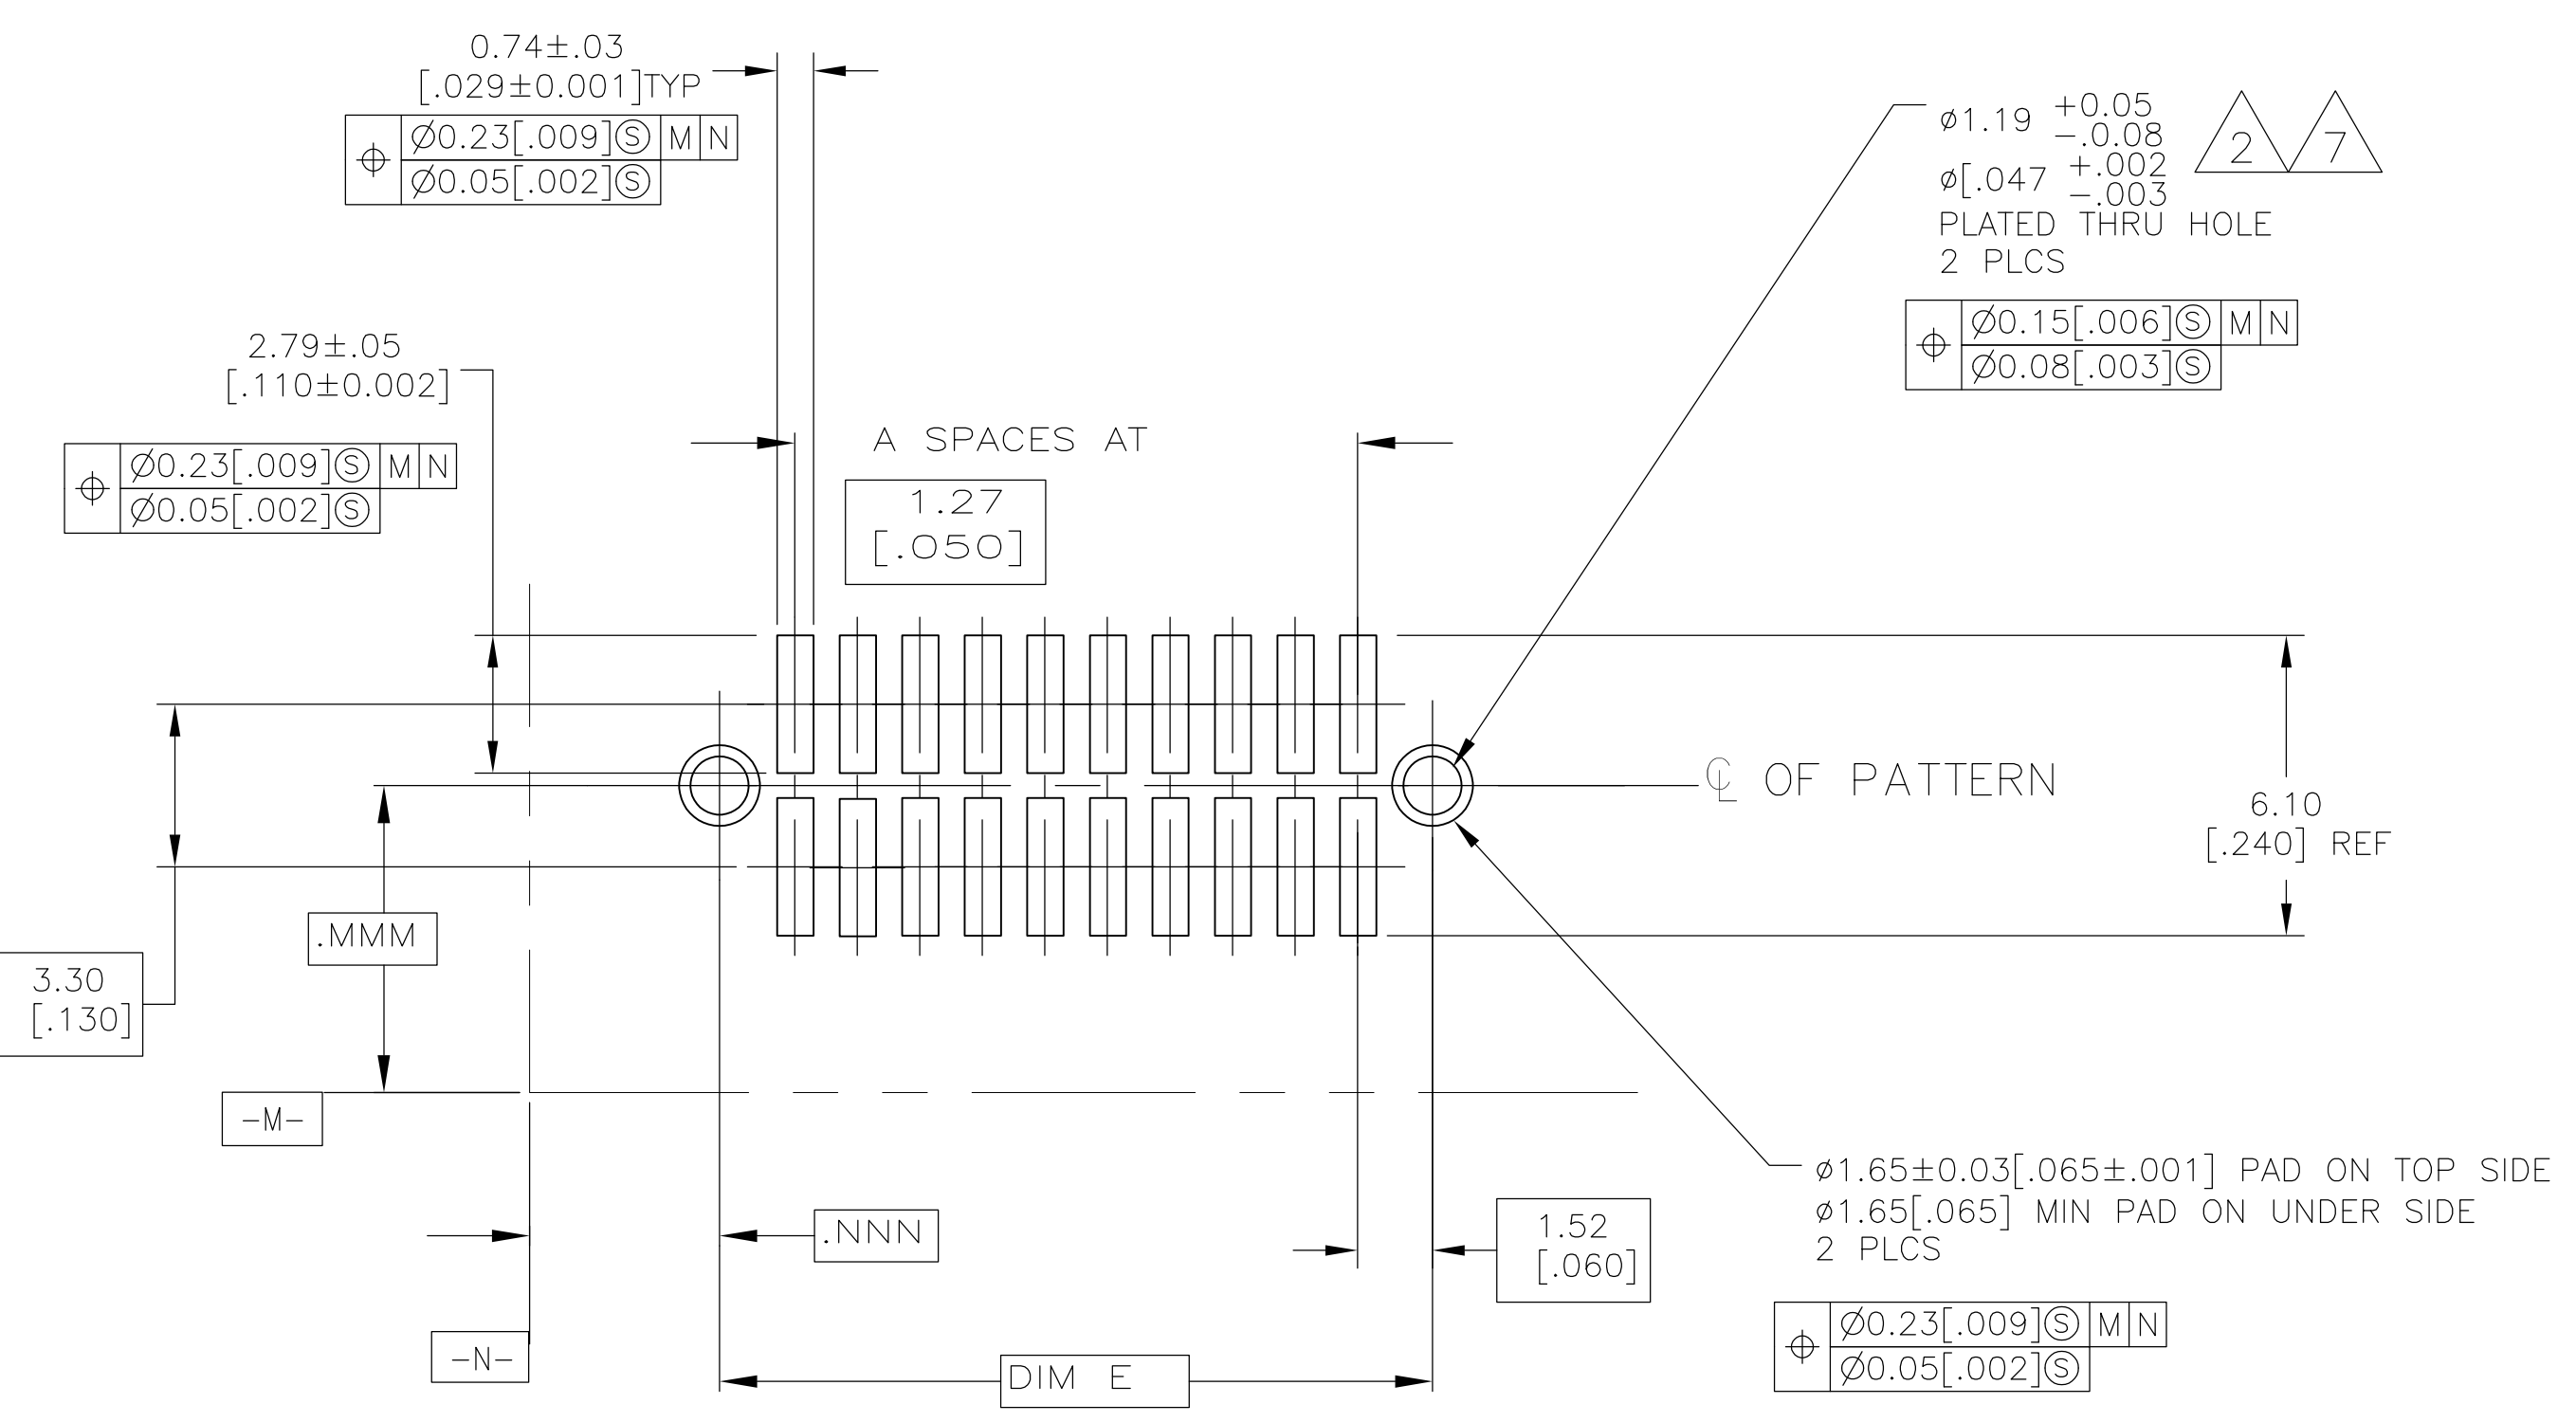

RECOMMENDED BOARD LAYOUT
SCALE: 7:1

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 08/07/91. KATE HELM. CHK: D. GORENC. 8/12/91. NAME: ASSEMBLY, RECEPTACLE, VERTICAL, DOUBLE ROW, SURFACE MOUNT, AMPMODU 50/50 GRID CONNECTOR. PRODUCT SPEC: 108-1332. APPLICATION SPEC: 114-7010. WEIGHT: -. SIZE: A1. CAGE CODE: 00779. DRAWING NO: 104652. CUSTOMER DRAWING. SCALE: 10:1. SHEET: 1 OF 1. REV: L1.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68682-310LF](#) [68684-306](#) [75140-7012](#) [87471-650](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [FCN-268M024-G/3D](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [AXE816124](#) [AXE720127](#)