


- 1 MOLDED PARTS: POLYESTER, UL RATED 94V-0, BLACK.
CONTACTS: BERYLLIUM COPPER.
- 2 2.54 μm [.000100] MIN TIN-LEAD ON TERMINATION END,
0.76 μm [.000030] MIN GOLD ON CONTACT AREA, ALL OVER
1.27 μm [.000050] MIN NICKEL.
- 3 POSITION TOLERANCE APPLIES 0.76 [.030] ABOVE DATUM V.
- 4 POSITION NUMBER 1 INDICATOR.
- 5 ELECTRICAL ENGAGEMENT ZONE.
- 6 RECOMMENDED 28 AWG RIBBON CABLE, 0.61 - 0.97 [.024 - .038]
THICK PVC, 1.0000 [.03937] PITCH.
AMP LOGO ORIENTATION IS OPTIONAL.
- 7 RECESS ON EACH END, OPPOSITE CORNER.
- 8 0.13 μm [.000005] MIN GOLD ON TERMINATION END,
0.76 μm [.000030] MIN GOLD ON CONTACT AREA, ALL OVER
1.27 μm [.000050] MIN NICKEL.
- 10 MOLD GATE PROJECTION ON EITHER END OF COVER TO BE
EXCLUDED FROM DIMENSION 'B' MEASUREMENT.

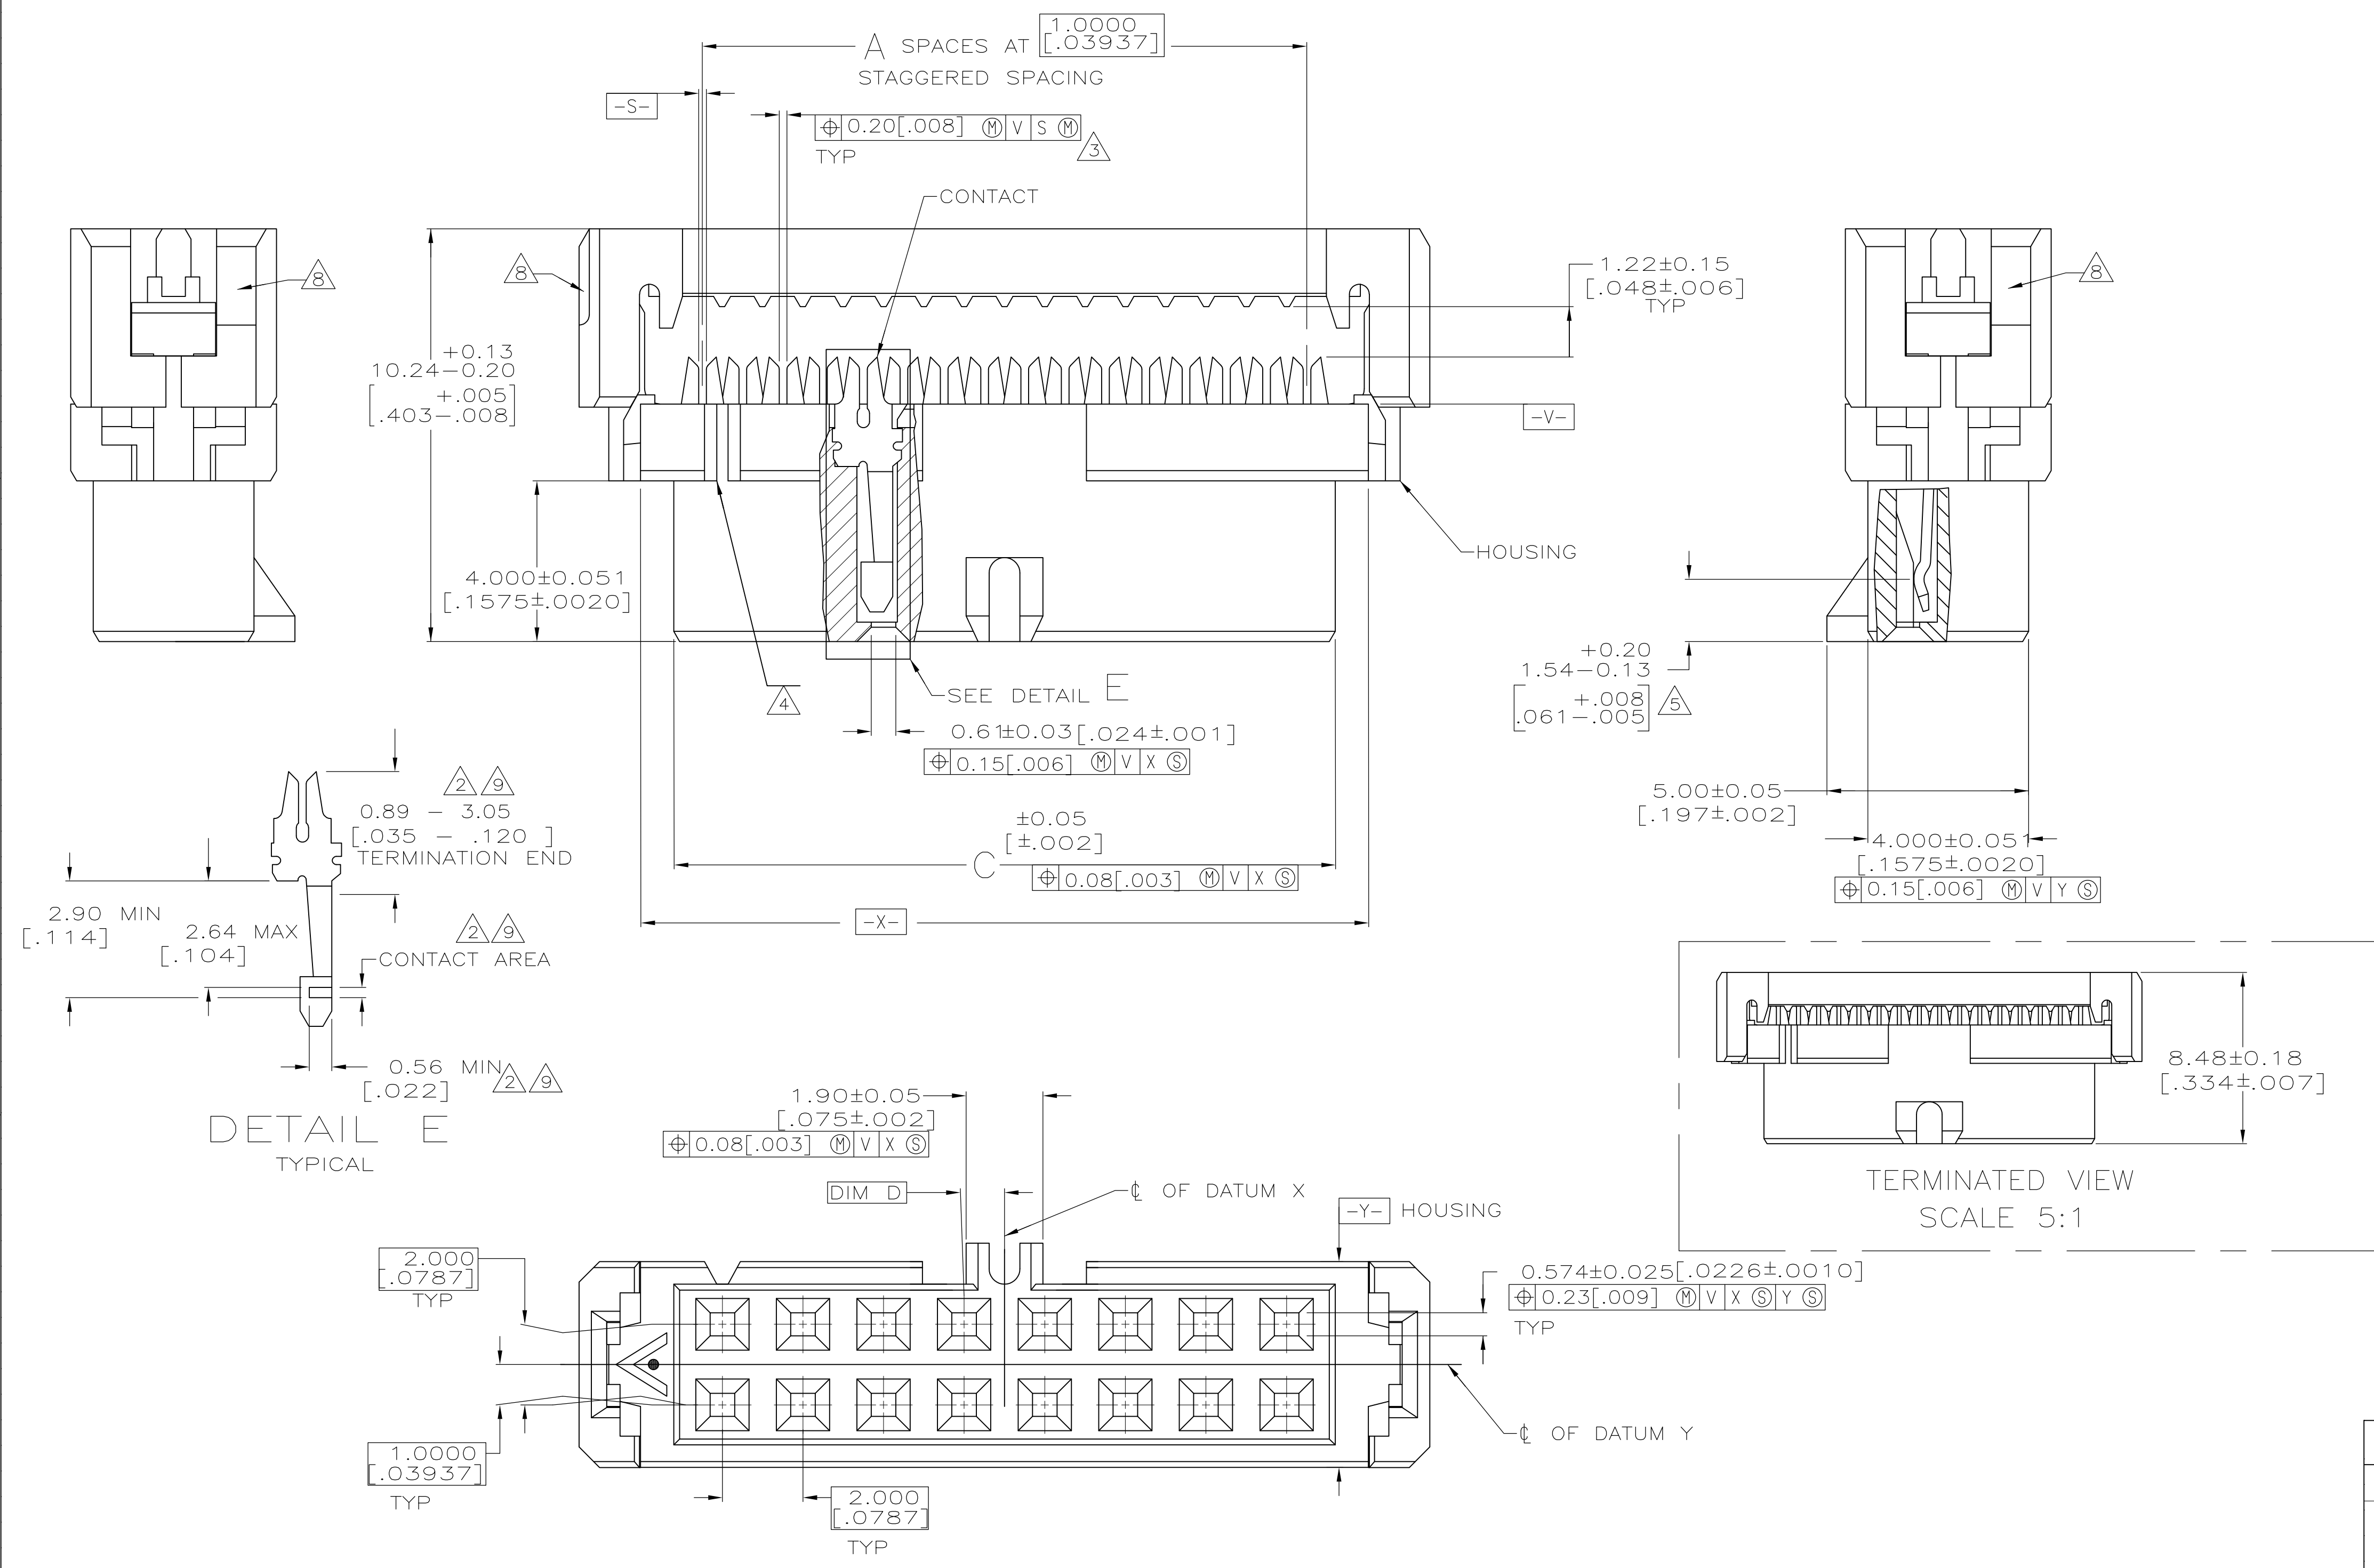

REV	DESCRIPTION	DATE	DWN	APVD
1	11	12	3-111623-1	
2	7	8	3-111623-0	
3	21	22	2-111623-9	
4	33	34	2-111623-8	
5	23	24	2-111623-7	
6	49	50	2-111623-6	
7	43	44	2-111623-5	
8	39	40	2-111623-4	
9	29	30	2-111623-3	
10	25	26	2-111623-2	
11	19	20	2-111623-1	
12	15	16	2-111623-0	
13	13	14	1-111623-9	
14	9	10	1-111623-8	
15	11	12	1-111623-7	
16	7	8	1-111623-6	
17	21	22	1-111623-5	
18	67	68	1-111623-4	
19	63	64	1-111623-3	
20	59	60	1-111623-2	
21	49	50	1-111623-1	
22	43	44	1-111623-0	
23	39	40	111623-9	
24	33	34	111623-8	
25	29	30	111623-7	
26	25	26	111623-6	
27	23	24	111623-5	
28	19	20	111623-4	
29	15	16	111623-3	
30	13	14	111623-2	
31	9	10	111623-1	
32				
33				
34				
35				
36				
37				
38				
39				
40				
41				
42				
43				
44				
45				
46				
47				
48				
49				
50				
51				
52				
53				
54				
55				
56				
57				
58				
59				
60				
61				
62				
63				
64				
65				
66				
67				
68				
69				
70				
71				
72				
73				
74				
75				
76				
77				
78				
79				
80				
81				
82				
83				
84				
85				
86				
87				
88				
89				
90				
91				
92				
93				
94				
95				
96				
97				
98				
99				
100				

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: mm [INCHES]. TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± .008 [0.03], 1 PLC ± .008 [0.03], 2 PLC ± .008 [0.03], 3 PLC ± .008 [0.03], 4 PLC ± .008 [0.03]. MATERIAL: POLYESTER. FINISH: CONTACTS: SEE TABLE.

DIN C. OBERMAN 02-21-92
CIR: J. McCLINTON 3-9-92
NAME: RECEPTACLE ASSY, POLARIZED, 2mm CL, AMP-LATCH
PRODUCT SPEC: 108-1372
APPLICATION SPEC: -
SIZE: A1
CAGE CODE: 00779
DRAWING NO: 111623
WEIGHT: -
CUSTOMER DRAWING
SCALE: 10:1
SHEET: 1 of 1
REV: L2

STE TE Connectivity

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009508121](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [68002-116](#) [68016-236H](#) [68648-049](#)