

**Double Mini Relay DMR**

- Limiting continuous current 30 A
- Easiest PCB routing among all PCB relays

Typical applications

Car alarm, door control, door lock, immobilizer, seat control, sun roof, window lifter, wiper control.




F084\_fw2c\_bw

Contact Data				
Contact arrangement	2 form C, 2 CO			
Rated voltage	12VDC			
Rated current	both systems	motor reverse <sup>1)2)</sup>	both systems	motor reverse <sup>1)2)</sup>
	20/20A	30/30A	18/18A	30/30A
Limiting continuous current				
at 23°C	20/20A	30/30A <sup>2)</sup>	18/18A	30/30A <sup>2)</sup>
at 85°C	15/15A	30/30A	12/12A	30/30A
Limiting making current <sup>1)</sup>	35A	35A	35A	35A
Limiting breaking current <sup>1)</sup>	35A	35A	35A	35A
Contact material	AgNi0.15	AgNi0.15	AgSnO <sub>2</sub>	AgSnO <sub>2</sub>
Min. recommended contact load	1A at 5VDC <sup>3)</sup>			
Initial voltage drop at 10A, typ./max.	30/300mV			
Operate/release time max. at nominal voltage	typ. 3 / 1.3ms <sup>4)</sup>			
Electrical endurance				
at cyclic temperature -40/+23/+85°C and 13.5VDC, both systems AgNi0.15, motor reverse blocked, 25A, 0.77mH inductive	>10 <sup>5</sup> ops.			
AgSnO <sub>2</sub> , lamp load, 45A (on), 8A (off), 80°C	>2x10 <sup>5</sup> ops.			
AgSnO <sub>2</sub> , resistive load, 20A, 80°C	>2x10 <sup>5</sup> ops.			
Mechanical endurance	>10 <sup>7</sup> operations			

- The values apply to a resistive or inductive load with suitable spark suppression and at maximum 13.5VDC for 12VDC load voltages.
- At 50% ON period: max. make time 15s.
- See chapter Diagnostics of Relays in our Application Notes or consult the internet at <http://relays.te.com/appnotes/>
- For unsuppressed relay coil. A low resistive suppression device in parallel to the relay coil increases the release time and reduces the lifetime caused by increased erosion and/or higher risk of contact tack welding.

Max. DC load breaking capacity


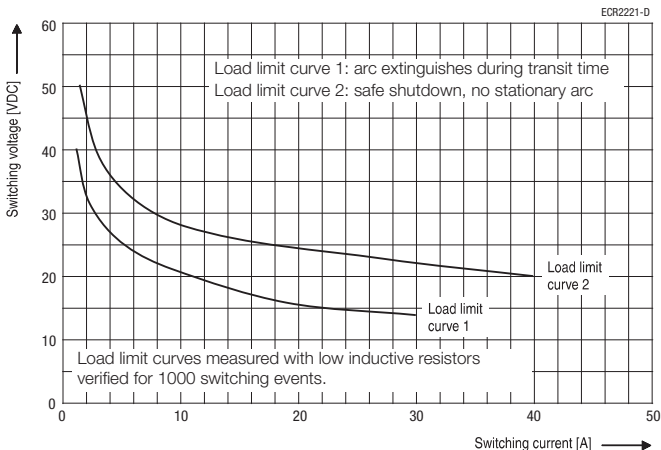


Coil Data	
Coil voltage range	-40 to +85°C
Rated coil voltage	12VDC

Coil versions, DC coil					
Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated power mW
001	12	6.9	1.0	255	565
002	12	5.8	0.8	178	809

All figures are given for coil without pre-energization, at ambient temperature +23°C.

Coil operating range

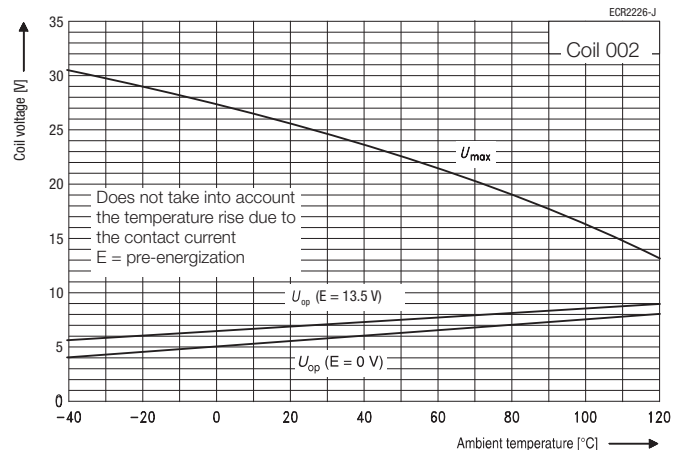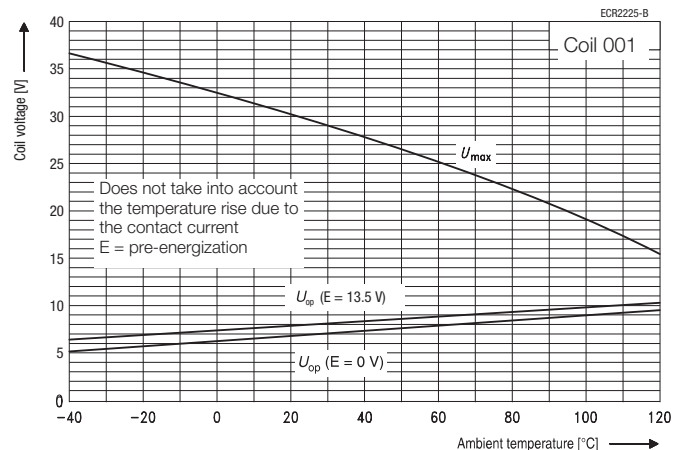

**Double Mini Relay DMR (Continued)**

**Insulation Data**

Initial dielectric strength	
between open contacts	500VAC <sub>rms</sub>
between contact and coil	500VAC <sub>rms</sub>




**Other Data**

EU RoHS/ELV compliance	compliant
Ambient temperature	-40 to 85°C
Cold storage, IEC 60068-2-1	1000h; -40°C
Dry heat, IEC 60068-2-2	1000h; +125°C
Temperature cycling (shock)	
IEC 60068-2-14, Na	1000 cycles; -40/+125°C
Temperature cycling	
IEC 60068-2-14, Nb	35 cycles; -40/+125°C
Damp heat cyclic	
IEC 60068-2-30, Db, Variant 1	6 cycles 25°C/55°C/93%RH
Damp heat constant	
IEC 60068-2-3, Ca	56 days 40°C/95%RH <sup>5)</sup>
Category of environmental protection	
IEC 61810	RT III - immersion cleanable
Sealing test	
IEC 60068-2-17	Qc, method 2, 1min, 70°C
Vibration resistance (functional)	
IEC 60068-2-6 (sine sweep)	10 to 200Hz; 6to 30g <sup>6)</sup>
Shock resistance (functional)	
IEC 60068-2-27 (half sine)	6ms; 30g <sup>6)</sup>
Shock resistance (destructive)	
IEC 60068-2-29 (half sine)	30g: 6ms, 105 shocks 100g: 2ms, 10 shocks
Terminal type	PCB
Weight	approx. 10g (0.35oz)
Solderability (aging 3: 4h/155°C)	
IEC 60068-2-20	Ta, method 1, hot dip 5s, 215°C
Resistance to soldering heat THT	
IEC 60068-2-20	Tb, method 1A, hot dip 10s, 260°C with thermal screen
Packaging unit	600 pcs.

5) Relays have to be dried at 85°C for 24 hours after test.

6) depending on mounting position: no change in the switching state >10µs.

**Dimensions**

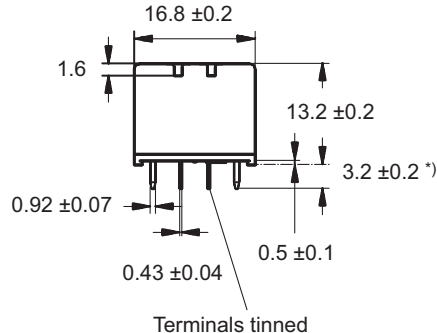


\*) Additional tin tops max. 1mm

**Terminal assignment**

Bottom view on solder pins


2 form C contacts, 2 CO



TE1651-J2

**PCB layout**

Bottom view on solder pins

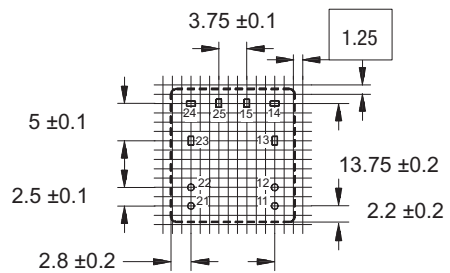

TE1652-S3

TE1650-B3

**Double Mini Relay DMR** (Continued)

<b>Product code structure</b>		Typical product code		<b>V23084</b>	<b>-C</b>	<b>2</b>	<b>001</b>	<b>-A</b>	<b>4</b>	<b>03</b>
<b>Type</b>				<b>V23084</b>	Double Mini Relay DMR					
<b>Terminal and enclosure</b>				<b>C</b>	PCB version, sealed					
<b>Design</b>				<b>2</b>	Double relay					
<b>Coil</b>				<b>001</b>	Standard (THT)		<b>002</b>	Sensitive (THT)		
<b>Contact type</b>				<b>A</b>	Single contact					
<b>Contact material</b>				<b>3</b>	AgNi015		<b>4</b>	AgSnO <sub>2</sub>		
<b>Contact arrangement</b>				<b>02</b>	1 form A, 1 NO		<b>03</b>	1 form C, 1 CO		

Product code	Terminal/Encl.	Design	Coil	Contact type	Cont. material	Arrangement	Part number
V23084-C2001-A303	PCB,	Double relay	Standard (THT)	Single	AgNi0.15	2 form C, 2 CO	0-1393267-2
V23084-C2002-A303	immersion		Sensitive (THT)				1-1393267-0
V23084-C2001-A403	cleanable		Standard (THT)		AgSnO <sub>2</sub>		0-1393267-6
V23084-C2002-A403			Sensitive (THT)				1-1393267-2

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Automotive Relays](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[896H-1AH-D1SW-001-24VDC](#) [896H-1CH-S-24VDC](#) [896HP-1AH-C-12VDC](#) [G5CE1ASIDC12](#) [AEV31024](#) [1393204-2](#) [1393302-3](#)  
[13Z99A115-0074](#) [1432872-1](#) [1617057-2](#) [2-1617057-2](#) [CB1F-M-12V-H15](#) [898H-1AH-D-001-12VDC](#) [24198-1](#) [5-1616920-2](#) [5-1617052-9](#)  
[5407-0011-HS](#) [CB1AF-M-12V-H59](#) [5-1617346-8](#) [103-1AH-C-12VDC](#) [CF2Q-12V](#) [V23134A1052X299](#) [CP112J](#) [896H-1CH-S-R1-U25-](#)  
[12VDC](#) [896H-1AH-S1-001-12VDC](#) [897H-1AH-D-R1-U02-12VDC](#) [897H-1AH-D-R1-U01-12VDC](#) [896H-1CH-D-U39-24VDC](#) [896E-1CH-](#)  
[D1SW-U57-12VDC](#) [896H-1CH-D1SW-R1-U30-12VDC](#) [896H-1AH-C1S-R1-24VDC](#) [102-1CH-C-12VDC](#) [V23076A3001D142T](#) [1-1617057-](#)  
[8](#) [1-19042-6](#) [3-1393305-1](#) [5436-0001-HS](#) [J7TKNA9](#) [V23234A1001X043-EV-144](#) [V23086-R1851-A502](#) [898H-1AH-D1SW-R1-12VDC](#)  
[RH4C1P2607](#) [V23134M0052G242](#) [1393204-1](#) [V23074A2001A402](#) [V23136A0004X086-EV-CBOX](#) [AZ979-1A-24D](#) [RA2-3082-15-1012](#)  
[AEVG16012](#) [2-1904020-1](#)