


Type CRG Series

- Key Features
- Thick film resistors with a high power to size ratio, ideally suited to industrial and general purpose use.
- A range from 1 ohm to 10M and tolerances of 1% and 5%. Also including zero ohm links.
- Suitable for most applications, including high frequency operation, owing to the short lead structure and low capacitance.
- Seven Package Sizes
- Terminal finish: Matte Sn

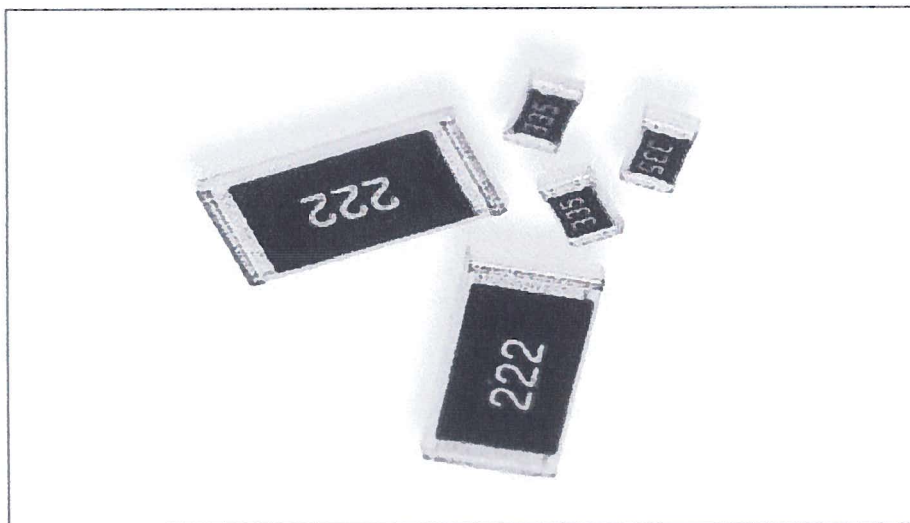


Precious metal terminations are screen printed onto a ceramic base and fired. The resistive element is screen printed and fired and the passivation layer added. Each resistor is trimmed to tolerance by laser. The pre-scribed tile is broken into strips, the end plating is fired on and the strips broken into individual components. Final termination is made by electroplating.

Characteristics – Electrical

Part No.	Rated Power @ 70 °C (W)		Resistance Range (Ohms)		Tolerance (%)	Code letter	Selection Series	Temp. Coefficient (ppm/°C)
	Min	Max	Min	Max				
0805	0.05	0.125	10	1	1	F	E24	±200
0603	0.063	0.1	10	1	1	F	E24	±200
0402	0.05	0.063	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	±200
1206	0.25	0.25	10	1	1	F	E24	±200
2512	1	1	10	1	1	F	E24	±200
0805	0.05	0.05	10	1	1	F	E24	±200
0603	0.063	0.063	10	1	1	F	E24	±200
0402	0.05	0.05	10	1	1	F	E24	±200
0201	0.05	0.05	10	1	1	F	E24	

Type CRG Series

Derating Curve

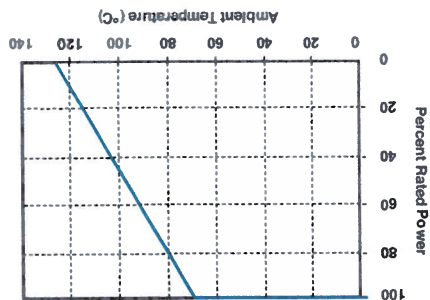

Mounting

The resistors are suitable for processing on automatic insertion equipment.

Marking

CRG0805, CRG1206, CRG2010, CRG2512

E96 series resistors are marked with a four digit code.

Zerohm components are marked '0'.

CRG0603

E24 5% series are marked with a three digit code.

E24 1% series are marked with a three digit code.

E96 series are marked with the international alphanumeric three character code (available on request). EXCEPT 10, 11, 13, 15, 20 & 75 decades which are marked as the E24 series.

CRG0201 & CRG0402 series unmarked.

Performance Characteristics


The evaluation of the performance characteristics is carried out with reference to IECQ specifications QC 400 000 and QC 400 100.

TEST REF	Long Term Tests $\pm(3\% + 0.1 \text{ ohm})$
4.23	Climatic sequence
4.24	Damp heat, steady state
4.25.1	Endurance at 70 °C
4.25.3	Endurance at 125 °C
TEST REF	Short Term Tests $\pm(1\% + 0.05 \text{ ohm})$
4.13	Overload
4.32	Adhesion
4.33	Bond strength of end face plating
4.19	Rapid change of temperature
4.18	Resistance to soldering heat

Storage

Unopened reels should be stored within a temperature range of +5 °C to +25 °C, separated from any dust, chemicals and solvent based materials. Non-adherence to this procedure could effect the solderability of this product.

How to Order

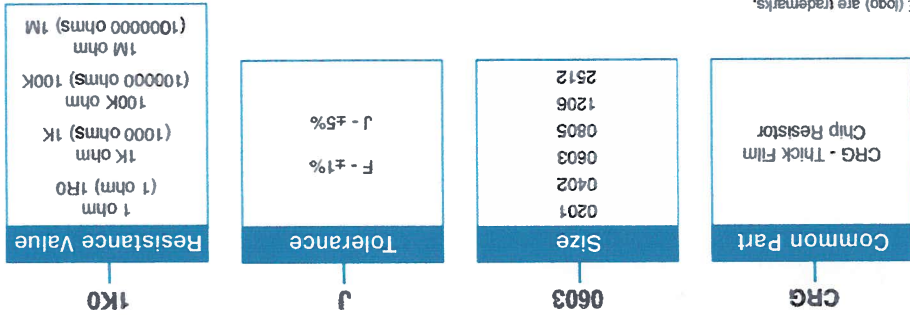

TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.

Other logos, product and Company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this datasheet, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this datasheet are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thick Film Resistors - SMD category](#):

Click to view products by [TE Connectivity manufacturer](#):

Other Similar products are found below :

[CRCW04028R20JNEE](#) [CRCW06036K80FKEE](#) [CRG1206F1K58](#) [CRL0603-FW-R700ELF](#) [M55342K06B6E19RWL](#) [RC1005F1072CS](#)
[RC1005F471CS](#) [RC1005F4751CS](#) [RCP0603W100RGED](#) [RCWP72251K47FKWB](#) [RLR05C7501GPB14](#) [RLR07C5111FSBSL](#) [ERJ-](#)
[1GMF1R00C](#) [ERJ-1GMF1R20C](#) [ERJ-1GMF2R55C](#) [ERJ-1GMF8R66C](#) [25121WF1003T4E](#) [25.501.3653.0](#) [290-1.0M-RC](#) [292-1.0M-RC](#) [292-](#)
[2.2K-RC](#) [292-4.7K-RC](#) [25121WF4700T4E](#) [292-470K-RC](#) [302-1.0M-RC](#) [CPG1206F10KC](#) [CRCW02011R00FXED](#) [CRCW060315K0FKEE](#)
[CRCW060320K5FKEE](#) [CRG0201F10K](#) [RCG0402150RFKED](#) [RCG04023K92FKED](#) [RCP2512B100RGWB](#) [RCWP110010R0FKS3](#)
[RCWP11002K00FKS3](#) [RCWP12061K00FKS2](#) [3520510RJT](#) [352075KJT](#) [M55342K11B9E53RUL](#) [RMC16-102JT](#) [RMC1JPTE](#) [TR0603MR-](#)
[075K1L](#) [5-2176094-4](#) [35202K7JT](#) [WF06Q1000FTL](#) [ERJ-S03J1R0V](#) [ERJ-S14J4R7U](#) [CHP2512L4R30GNT](#) [CPCC10270R0JE32](#)
[RCWP11001K00FKS3](#)