


# SPECIFICATION CONTROL DRAWING

**44B5121**

<b>TITLE</b> TWO CONDUCTOR CABLE, SPIRALLY SHIELDED, JACKETED, GENERAL PURPOSE, 600 VOLT	<b>Date</b> 4-20-07	<b>Revision</b> H
This specification sheet forms a part of the latest issue of Raychem Specification 55A.		

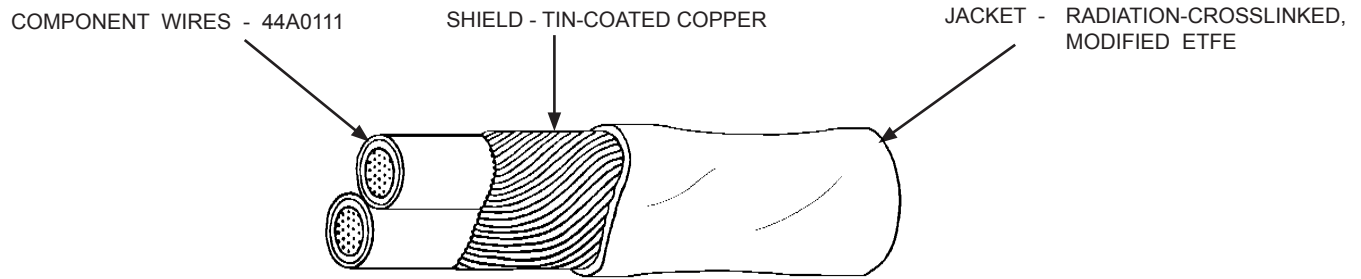

CABLE CONSTRUCTION DETAILS							
PART NUMBER <sup>1/</sup>	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lbs/1000 ft.)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
44B5121-24-*	24	36	.006	.008	.107	.112	9.5
44B5121-22-*	22	36	.006	.008	.121	.127	12.4
44B5121-20-*	20	36	.006	.008	.137	.144	16.4
44B5121-18-*	18	36	.006	.008	.157	.165	22.4
44B5121-16-*	16	36	.006	.008	.171	.180	27.1
44B5121-14-*	14	36	.006	.008	.205	.215	39.3
44B5121-12-*	12	36	.007	.009	.245	.257	58.0

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

**TEMPERATURE RATING:** 150°C  
 Maximum continuous conductor temperature  
**VOLTAGE RATING:** 600 volts (rms) at sea level  
**ACCELERATED AGING:** 300 ± 3°C for 7 hours  
**BLOCKING:** 150 ± 3°C for 6 hours  
**DIELECTRIC WITHSTAND:** 2500 volts (rms), 60 Hz, 1 minute  
**FLAMMABILITY (Procedure 1):** 3 seconds (maximum);  
 3 in. (maximum); no flaming of facial tissue  
**JACKET COLOR:** White preferred  
**JACKET ELONGATION AND TENSILE STRENGTH:**  
 Elongation, 50% (minimum)  
 Tensile Strength, 5000 lbf/in<sup>2</sup> (minimum)  
**JACKET FLAWS:**  
 Spark Test, 1.0 kV (rms)  
 Impulse Dielectric Test, 6.0 kV (peak)

**LIFE CYCLE:** 200 ± 3°C for 168 hours  
**LOW TEMPERATURE-COLD BEND:** -65 ± 2°C for 4 hours  
**SHIELD COVERAGE:** 85% (minimum)  
**VOLTAGE WITHSTAND TEST (Post Environmental):**  
 1000 volts (rms), 60 Hz, 1 minute

**PART NUMBER:**  
 The "\*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.

<sup>1/</sup> Example: AWG 20, black and brown component wires; white jacket:  
 44B5121-20-0/1-9

**NOTE:** Nominal values are for information only.  
 Nominal values are not requirements.

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.		
<sup>1/</sup> COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx"). OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.		
Page 1 of 1	DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL  THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.	<b>Raychem</b> Wire & Cable 501 Oakside Avenue Redwood City, CA 94063-3800 Phone: 1-800-227-8816 Fax: 1-650-361-6297

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multi-Conductor Cables](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[89182-010-1000](#) [89705-008-500](#) [6000FE-877-1000](#) [CS2885-000](#) [M27500-20SP2S23](#) [6300FE-877-U1000](#) [6309UE-877-1000](#) [M3905-BK005](#)  
[6502FE 8771000](#) [6541PA-008-U1000](#) [CV6807-000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-](#)  
[0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [752687-000](#) [768146-000](#) [773159-000](#)  
[82841-877-5000](#) [83318E-009-500](#) [8348-060-500](#) [83559-002-1000](#) [83653-002-5000](#) [83659-002-1000](#) [83709-002-1000](#) [8404-060-500](#) [8469](#)  
[060100](#) [858171-000](#) [8628-060-500](#) [868361-001](#) [8730-060-1000](#) [8737-060-U1000](#) [8747-060-100](#) [8747-060-1000](#) [8769-060-1000](#) [8775-060-](#)  
[500](#) [8780-060-1000](#) [8782-001-U1000](#) [88444-002-1000](#) [9159-060-500](#) [939870-000](#) [9423 060U500](#) [9444 060U1000](#) [9497 0001000](#) [9515-060-](#)  
[1000](#)