


CUSTOMER DRAWING

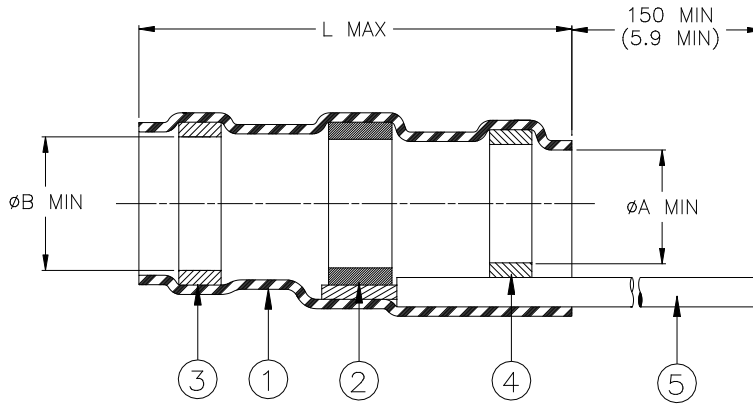

Product Name	Product Dimensions			Cable Dimensions			AWG
	øA min	øB min	L max	øD max	øE min	J±1.3 (±0.050)	
D-142-64-55-24-5	9.01 (0.355)	10.42 (0.410)	24.40 (0.960)	8.80 (0.355)	5.30 (0.210)	9.40 (0.370)	24
D-142-65-55-22-5	10.80 (0.425)	11.65 (0.460)	30.00 (1.180)	10.80 (0.425)	5.70 (0.225)		22
D-142-66-55-22-5	13.35 (0.525)	13.85 (0.545)	31.00 (1.220)	13.35 (0.525)	8.90 (0.350)		22


MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Color: natural.
- SOLDER PREFORM WITH FLUX:
SOLDER: TYPE Cd18 per ANSI J-STD-006.
FLUX: TYPE ROM1 per ANSI J-STD-004.
- MELTABLE SEALING RING: Thermally stabilized thermoplastic. Color: blue.
- MELTABLE SEALING RING: Thermally stabilized thermoplastic. Color: Natural.
- GROUND LEAD: Raychem 55A0111-GA-5 in accordance with MIL-W-22759/32, AWG "GA" (see table), stranded tin plated. Color: green.

APPLICATION

- These parts are designed to provide an environment protected shield termination on cables, rated for 105°C minimum, meeting the dimensional criteria listed and having tin or silver plated shields.
- Temperature range: -55°C to +125°C.
- Install using TE Connectivity-approved convection or infrared tools in accordance with Raychem assembly procedure RCPS-100-70.
- Assemblies will meet requirements of Raychem specification RT-1404.

For best results, prepare the cable as shown:

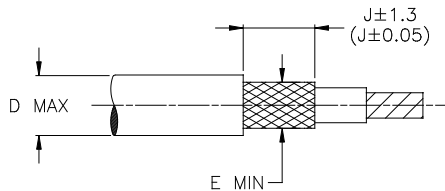

TE Connectivity, TE connectivity (logo), Raychem, Thermofit, and SolderSleeve are trademarks

		Raychem THERMOFIT DEVICES	TITLE: SOLDERSLEEVE SHIELD TERMINATOR			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.			DOCUMENT NO.: D-142-6X-55-GA-5			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	Revision: 3		Issue Date: April 2020	
DRAWN BY: M. FORONDA	DATE: 06-Sept-00	ECO: ECO-20-004959	SCALE: None	SIZE: A	SHEET: 1 of 1	

Print Date: 21-Apr-20 **If this document is printed it becomes uncontrolled. Check for the latest revision.**

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[D38999/24FJ4AN](#) [570416-000](#) [CLTEQ-M81CE-SSRELAY-4-20V](#) [4-1195131-0](#) [650069-000](#) [SMD100-2](#) [358838-000](#) [CB-1022B-78](#)
[RM707012](#) [RP410012](#) [MMS42](#) [1-640426-8](#) [2EDL4CM](#) [DTS20W19-11PD-3028-LC](#) [RM202615](#) [NC6-P104-06](#) [MSPS103B](#) [DTS26F21-](#)
[41HE-LC](#) [DTS26F21-41AE](#) [DTS26F21-41PE-LC](#) [DTS26F21-11SE-3028-LC](#) [30DCB6](#) [1932144-1](#) [293545-4](#) [LVR125S](#) [MS27466T25F4PB](#)
[CKB-38-78010](#) [TR04AI-TINELLOCKRING](#) [1206SFF150F/63-2](#) [D38999/20JB35HA](#) [TE1500A2R2J](#) [D38999/20WC8BB](#) [DTS24F19-11SC-](#)
[3028-LC](#) [D38999/24WG11HA](#) [D38999/24WG11HN](#) [MS27467T21F11H](#) [DJT16E21-11HA](#) [MS27467T21F35J](#) [MS27467T21F11J](#)
[MS27467T21F16H-LC](#) [MS27467T21F35H](#) [MS27467T21F41H-LC](#) [1206SFH150F/24-2](#) [RP330024](#) [DJT16E21-11PA-LC](#) [DJT16E21-11HA-](#)
[LC](#) [DJT16E21-11AA](#) [MS27467T21B11JA](#) [DJT16E21-11JA](#) [MS27467T21B11JA-LC](#)