


P	LTR	DESCRIPTION	DATE	DWN	APVD
1		INITIAL CREATED	23SEP2019	CL	RS

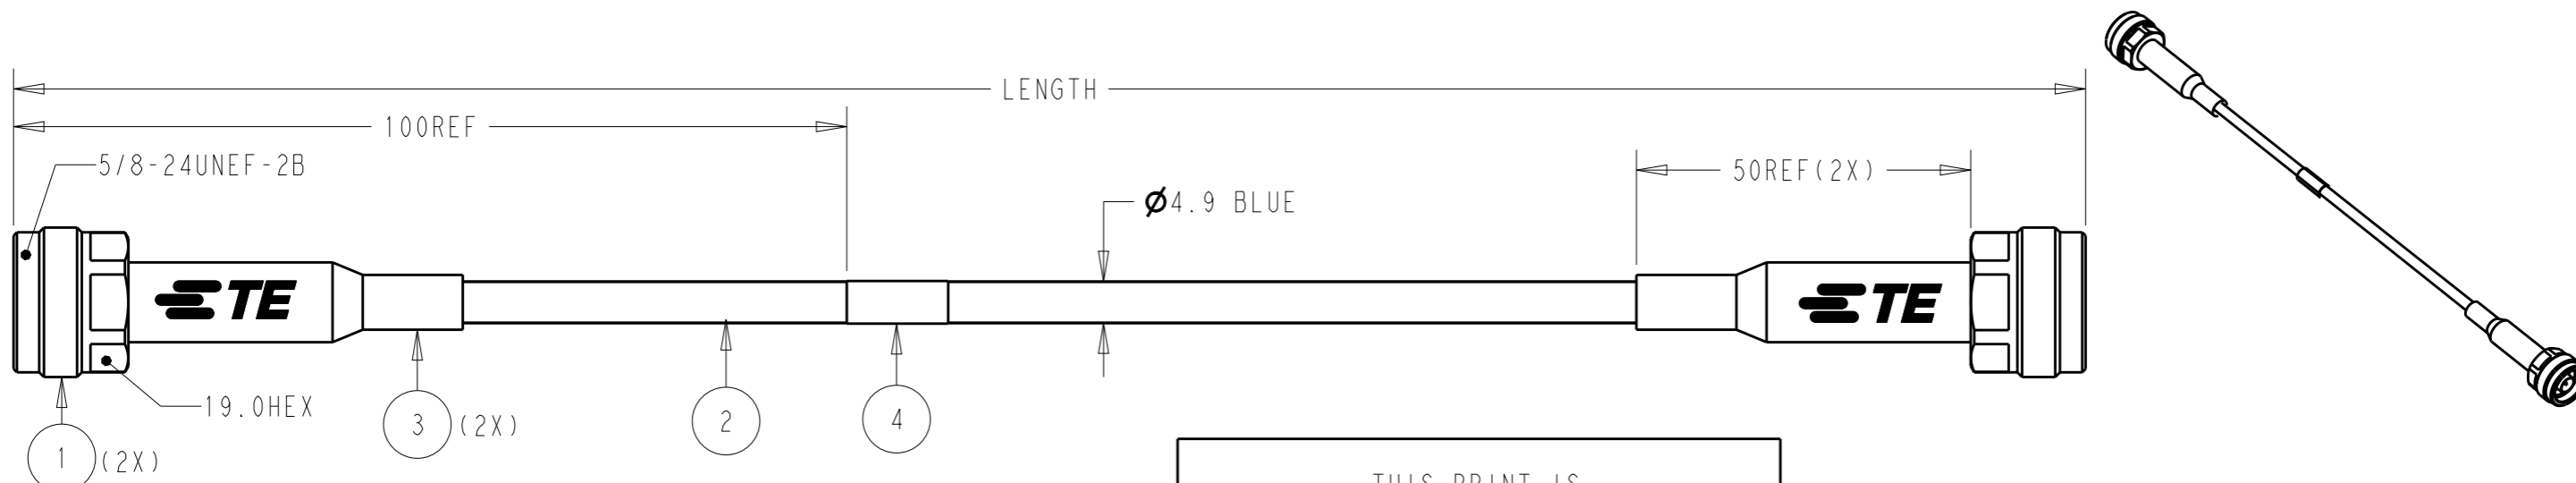

THIS PRINT IS  
**PRELIMINARY**  
 UNQUALIFIED PRODUCT  
 CONTACT PRODUCT ENGINEERING  
 BEFORE USING THIS PRINT

NOTES:

- MATERIAL AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702
- CONNECTOR N-TYPE INTERFACE FOLLOW IEC61169-16
- PRODUCT RATING:  
 TEMPERATURE: -40°C TO +85°C  
 CHARACTERISTIC IMPEDANCE: 50 OHMS Normal  
 FREQUENCY RANGE: DC TO 18GHz  
 DURABILITY: NO LESS THAN 500TIMES  
 BEND RADIUS: 20MM MIN (STATIC)  
 50MM MIN(REPEATED)
- CABLE ASSEMBLY TO BE 100% SI TESTED  
 VSWR: 1.3:1 MAX @ DC~18GHz  
 INSERT LOSS: REFER TO TABLE  
 MECHANICAL PHASE STABILITY: <math>\lt; \pm 5^\circ</math>  
 MECHANICAL AMPLITUDE STABILITY: <math>\lt; \pm 0.1\text{dB}</math>
- CONNECTOR NEED COVER WITH CAP, PACKAGE FOLLOW TEC-107-115

1-2016657-5	1500±15	2.08dB@6GHz	3.96dB@18GHz
1-2016657-0	1000±15	1.52dB@6GHz	2.94dB@18GHz
2016657-6	600±10	1.07dB@6GHz	1.94dB@18GHz
PART NUMBER	LENGTH	INSERTION LOSS(MAX)	

PC	Q'TY	DESCRIPTION	ITEM
1	1	HEAT SHRINK TUBE	3
2	1	PC N-TYPE, MALE, STRAIGHT	1
AR	1	COAX CABLE, SOLID SPCCS 0.94MM, PTFE TAPE INSULATION, SPC TAPE OUTER CONDUCTOR 3.15MM, FEP JACKET, 50OHM, BLUE	2
4	1	LABEL	4

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 20AUG2019 Cedar Liu		<b>TE</b> TE Connectivity	
DIMENSIONS: mm		CHK 28AUG2019 Roger Song			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RF CA, N M TO N M, WITHOUT ARMOR 18GHz	
		0 PLC ±- 1 PLC ±0.1 2 PLC ±0.01 3 PLC ±0.001 4 PLC ±0.0001 ANGLES ±-		PRODUCT SPEC -	
MATERIAL TBD		FINISH -		APPLICATION SPEC -	
		WEIGHT -		SIZE A3	
		CUSTOMER DRAWING		CAGE CODE 00779	
				DRAWING NO C-2016657	
				RESTRICTED TO	
				SCALE 1:3	
				SHEET 1 OF 1	
				REV 1	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Cable Assemblies](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#)  
[24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-](#)  
[50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [4814-BB-24](#)  
[5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [MXHT83QE3000](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-](#)  
[6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#)  
[R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#) [PCX-18-50](#)