
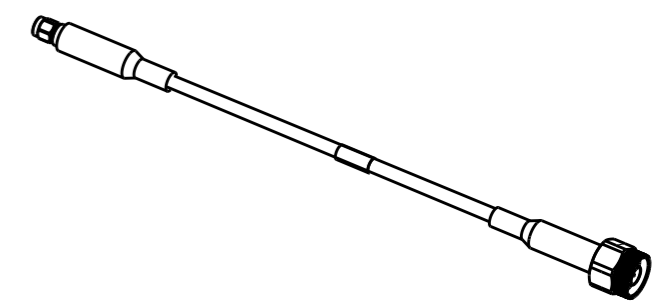


P	LTR	DESCRIPTION	DATE	DWN	APVD
1		INITIAL CREATED	23SEP2019	CL	RS

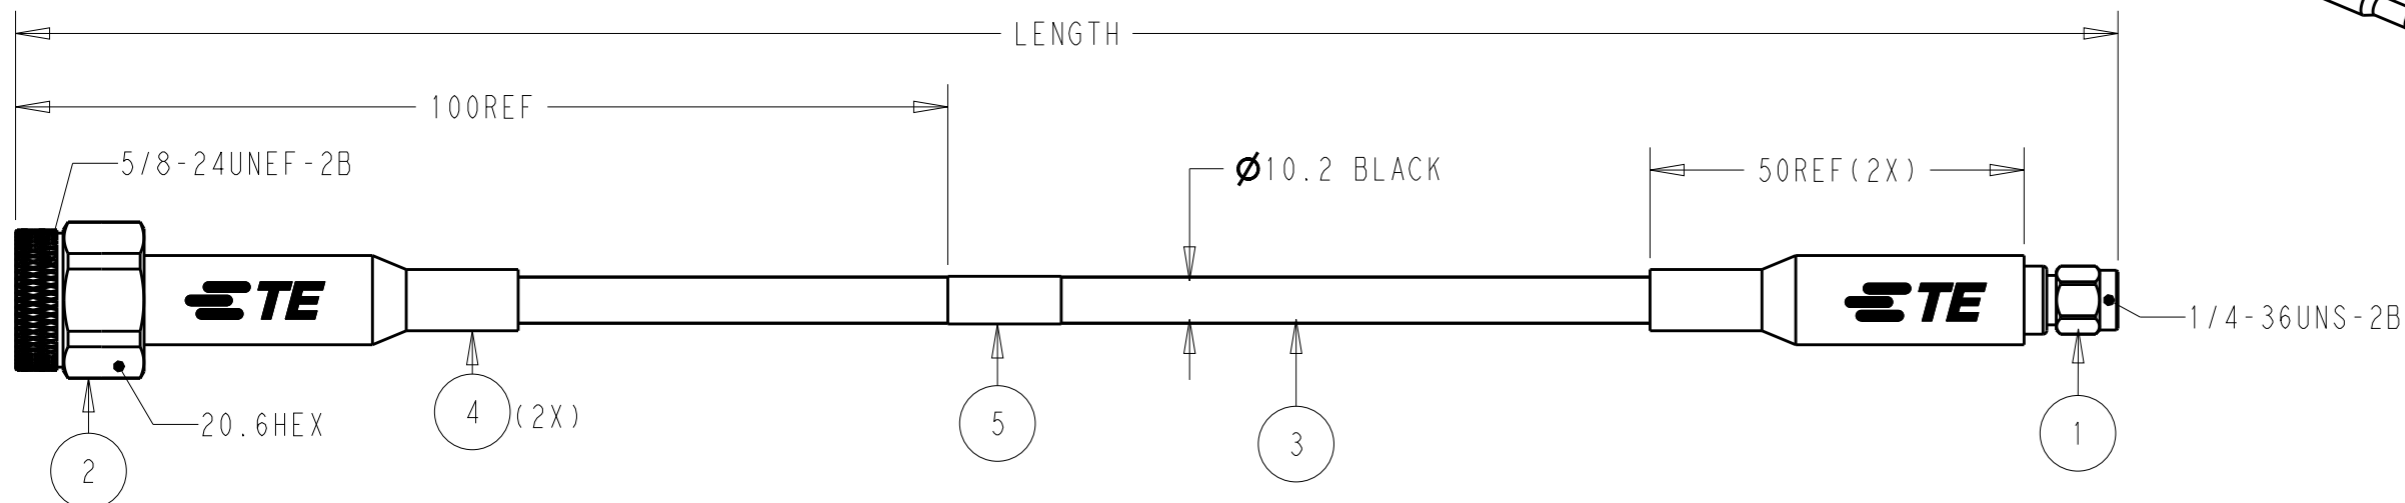

THIS PRINT IS
PRELIMINARY
UNQUALIFIED PRODUCT
CONTACT PRODUCT ENGINEERING
BEFORE USING THIS PRINT

- NOTES:
- MATERIAL AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702
 - CONNECTOR SMA INTERFACE FOLLOW IEC60169-15
CONNECTOR N-TYPE INTERFACE FOLLOW IEC61169-16
 - PRODUCT RATING:
TEMPERATURE: -40°C TO +85°C
CHARACTERISTIC IMPEDANCE: 50 OHMS Normal
FREQUENCY RANGE: DC TO 18GHz
DURABILITY: NO LESS THAN 500TIMES
BEND RADIUS: 54MM MIN (STATIC)
108MM MIN(REPEATED)
 - CABLE ASSEMBLY TO BE 100% SI TESTED
VSWR: 1.35:1 MAX @ DC~18000MHz
INSERT LOSS: REFER TO TABLE
MECHANICAL PHASE STABILITY: $\lt; \pm 8^\circ$
MECHANICAL AMPLITUDE STABILITY: $\lt; \pm 0.15\text{dB}$
 - CONNECTOR NEED COVER WITH CAP, PACKAGE FOLLOW TEC-107-115

1-2016703-5	1500±15	1.93dB@6GHz	3.35dB@18GHz
1-2016703-0	1000±15	1.35dB@6GHz	2.53dB@18GHz
2016703-6	600±10	0.97dB@6GHz	1.70dB@18GHz
PART NUMBER	LENGTH	INSERTION LOSS(MAX)	

UNIT	Q'TY	DESCRIPTION	ITEM
1	PC	LABEL	5
MR	AR	HEAT SHRINK TUBE	4
MR	AR	COAX CABLE, SOLID SPCCS 0.94MM, PTFE TAPE INSULATION, SPC TAPE OUTER CONDUCTOR 3.15MM, WITH ARMOR, BRAID NYLON JACKET, 500HM, BLACK	3
PC	1	PC N-TYPE, MALE, STRAIGHT	2
PC	1	PC SMA, MALE, STRAIGHT	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 20AUG2019 Cedar Liu	TE TE Connectivity	
DIMENSIONS: mm		CHK 22AUG2019 Roger Song		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD - Roger Song	NAME RF CA, N M TO SMA M, WITH ARMOR 18GHz	
0 PLC ±-		PRODUCT SPEC -	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
1 PLC ±0.1		APPLICATION SPEC -	A3 00779 C-2016703	
2 PLC ±0.01		WEIGHT -	SCALE 1:3 SHEET 1 OF 1 REV 1	
3 PLC ±0.001		CUSTOMER DRAWING		
4 PLC ±0.0001				
ANGLES ±-				
MATERIAL TBD	FINISH -			
	finish_spec_2			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#)
[24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-](#)
[50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [4814-BB-24](#)
[5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [MXHT83QE3000](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-](#)
[6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#)
[R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#) [PCX-18-50](#)