

4

3



2

1

THIS DRAWING IS UNPUBLISHED.      RELEASED FOR PUBLICATION  
 © COPYRIGHT - By -      ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
CE	16					
	C	ECR-14-011637	14AUG2014	HZ	RZ	

1. MAXIMUM CONNECTOR INSERTION LOSS IS 0.5dB PLUS CABLE ATTENUATION OF 3.5dB/km AT 850nm. MEASURE AGAINST A REFERENCE LEAD
2. TEST DATA PROVIDED WITH EACH ASSEMBLY.
3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702.

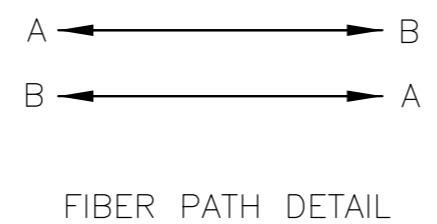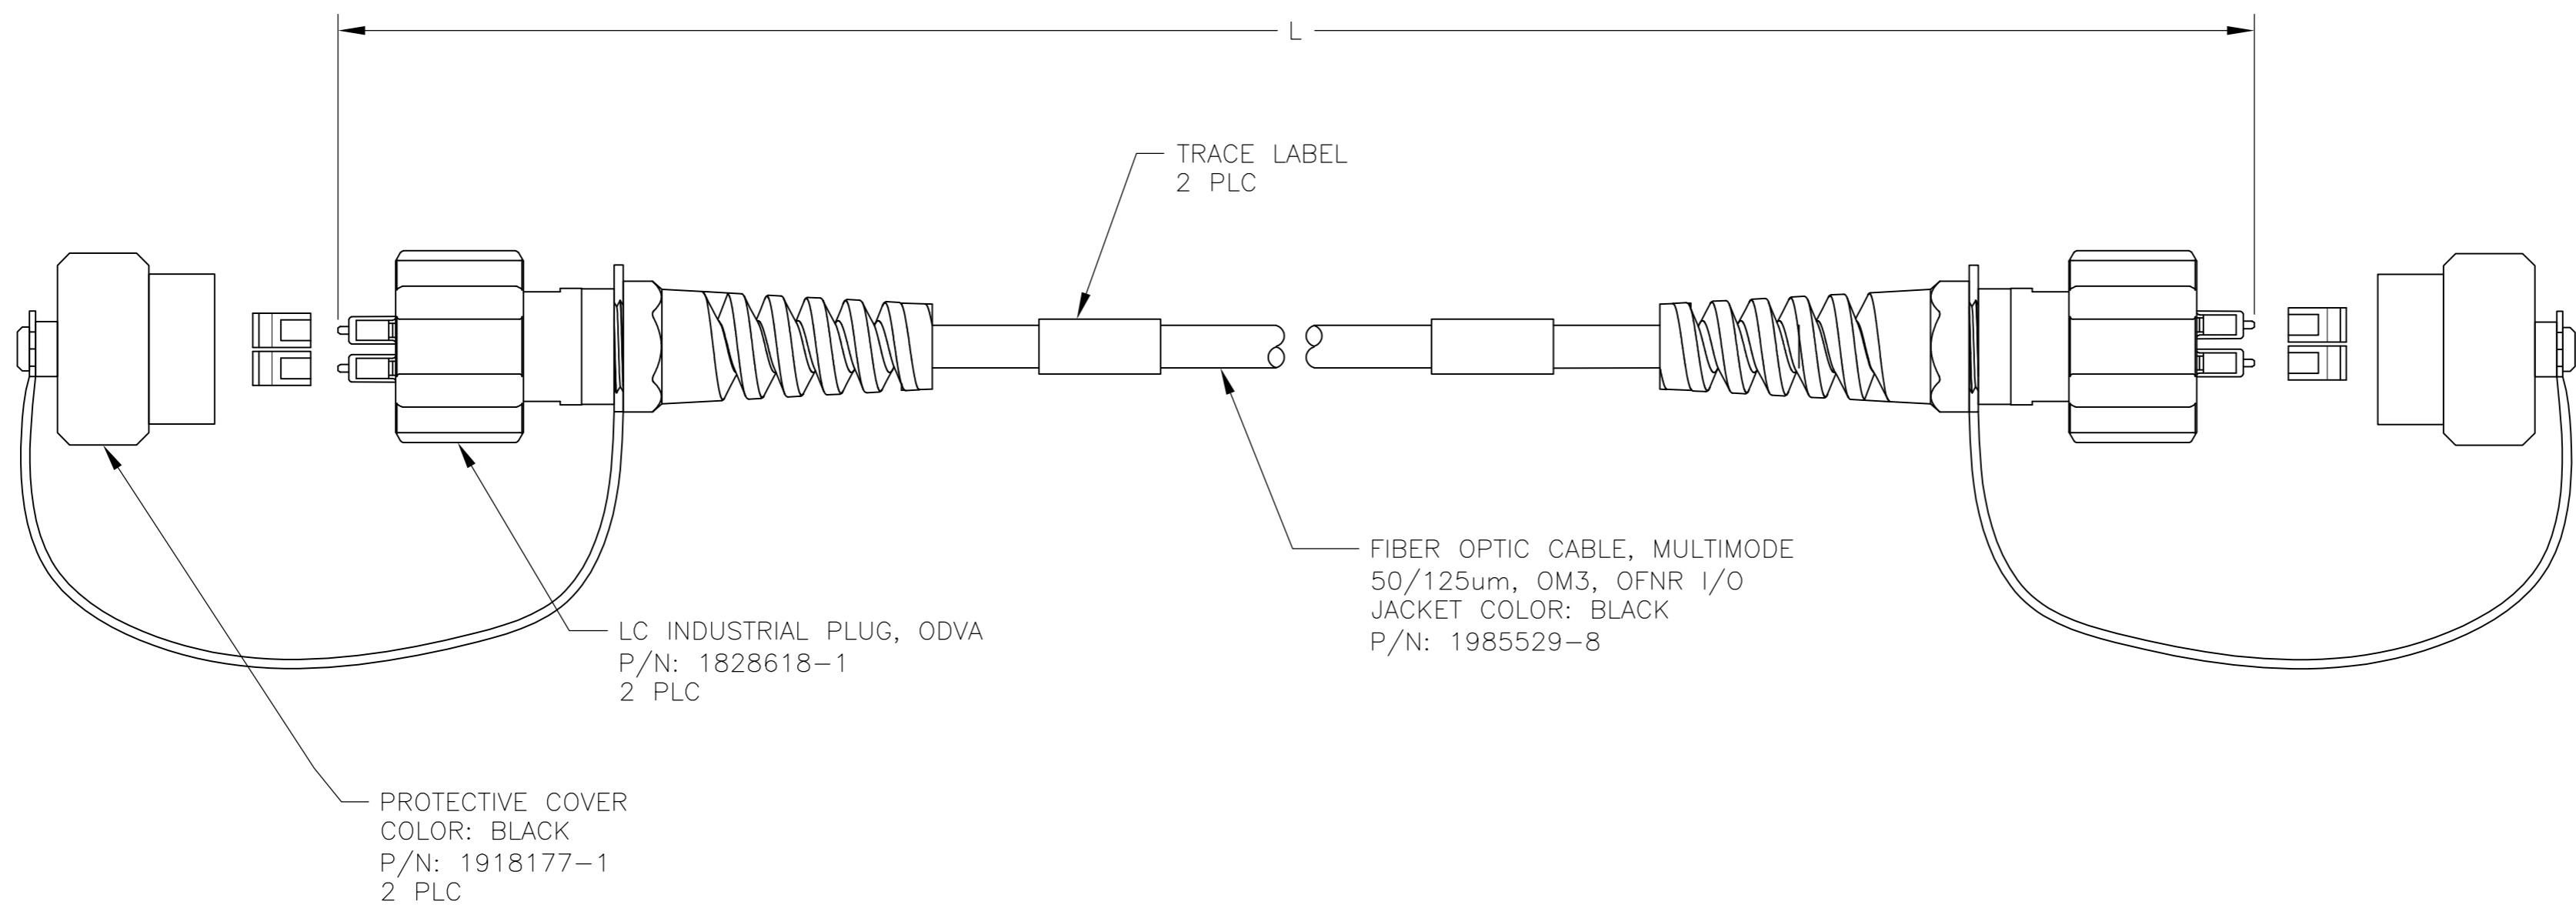

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN LG EBY 23MAR09	<b>STE</b> TE Connectivity													
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 23MAR09														
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. BAECHTLE 23MAR09	NAME CABLE ASSEMBLY, FIBER OPTIC, 50/125, OM3, 2 FIBER BREAKOUT CABLE, SEALED CIRCULAR LC DUPLEX (ODVA), BOTH ENDS													
<table border="1"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	PRODUCT SPEC	SIZE A2	
0 PLC	± -															
1 PLC	± -															
2 PLC	± -															
3 PLC	± -															
4 PLC	± -															
ANGLES	± -															
MATERIAL		APPLICATION SPEC	CAGE CODE 00779	DRAWING NO 2064915												
FINISH		WEIGHT	RESTRICTED TO													
		CUSTOMER DRAWING		SCALE NTS												
		SHEET 1 of 2		REV C												


2064915

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	-	-	SEE SHEET 1	-	-	-

1.38	250.0±2.50	[9842.5±98.4]	8-2064915-2
0.85	100.0±1.00	[3937.0±39.4]	8-2064915-1
1.03	152.40±1.50	[6000.0±60.0]	8-2064915-0
0.77	76.00±0.76	[2992.1±29.9]	7-2064915-6
0.76	75.00±0.75	[2953.0±30.0]	7-2064915-5
0.71	61.00±0.61	[2400.0±24.0]	6-2064915-1
0.68	50.00±0.50	[1969.0±20.0]	5-2064915-0
0.64	40.00±0.40	[1574.80±15.75]	4-2064915-0
0.64	39.00±0.35	[1535.43±13.78]	3-2064915-9
0.63	38.00±0.35	[1496.06±13.78]	3-2064915-8
0.63	37.00±0.35	[1456.69±13.78]	3-2064915-7
0.63	36.00±0.35	[1417.32±13.78]	3-2064915-6
0.62	35.00±0.35	[1377.95±13.78]	3-2064915-5
0.62	34.00±0.30	[1338.58±11.81]	3-2064915-4
0.62	33.00±0.30	[1299.21±11.81]	3-2064915-3
0.61	32.00±0.30	[1259.84±11.81]	3-2064915-2
0.61	31.00±0.30	[1220.47±11.81]	3-2064915-1
0.61	30.00±0.30	[1181.10±11.81]	3-2064915-0
0.60	29.00±0.30	[1141.73±11.81]	2-2064915-9
0.60	28.00±0.30	[1102.36±11.81]	2-2064915-8
0.59	27.00±0.30	[1062.99±11.81]	2-2064915-7
0.59	26.00±0.30	[1023.62±11.81]	2-2064915-6
0.59	25.00±0.30	[984.25±11.81]	2-2064915-5
0.58	24.00±0.30	[944.88±11.81]	2-2064915-4
0.58	23.00±0.30	[905.51±11.81]	2-2064915-3
0.58	22.00±0.30	[866.14±11.81]	2-2064915-2
0.57	21.00±0.30	[826.77±11.81]	2-2064915-1
0.57	20.00±0.30	[787.40±11.81]	2-2064915-0
0.57	19.00±0.30	[748.03±11.81]	1-2064915-9
0.56	18.00±0.30	[708.66±11.81]	1-2064915-8
0.56	17.00±0.30	[669.29±11.81]	1-2064915-7
0.56	16.00±0.30	[629.92±11.81]	1-2064915-6
0.55	15.00±0.15	[590.55±5.91]	1-2064915-5
0.55	14.00±0.15	[551.18±5.91]	1-2064915-4
0.55	13.00±0.15	[511.81±5.91]	1-2064915-3
0.54	12.00±0.15	[472.44±5.91]	1-2064915-2
0.54	11.00±0.15	[433.07±5.91]	1-2064915-1
0.54	10.00±0.15	[393.70±5.91]	1-2064915-0
0.53	9.00±0.15	[354.33±5.91]	2064915-9
0.53	8.00±0.15	[314.96±5.91]	2064915-8
0.52	7.00±0.08	[275.59±3.15]	2064915-7
0.52	6.00±0.08	[236.22±3.15]	2064915-6
0.52	5.00±0.08	[196.85±3.15]	2064915-5
0.51	4.00±0.08	[157.48±3.15]	2064915-4
0.51	3.00±0.05	[118.11±1.97]	2064915-3
0.51	2.00±0.05	[78.74±1.97]	2064915-2
0.50	1.00±0.05	[39.37±1.97]	2064915-1

MAX IL (dB)  L METERS [INCHES] PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN LG EBY 23MAR09	 TE Connectivity													
DIMENSIONS: METERS [INCHES]		CHK J. DUNCAN 23MAR09														
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. BAECHTLE 23MAR09	NAME CABLE ASSEMBLY, FIBER OPTIC, 50/125, OM3, 2 FIBER BREAKOUT CABLE, SEALED CIRCULAR LC DUPLEX (ODVA), BOTH ENDS													
<table border="1"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	PRODUCT SPEC -	RESTRICTED TO	
0 PLC	± -															
1 PLC	± -															
2 PLC	± -															
3 PLC	± -															
4 PLC	± -															
ANGLES	± -															
MATERIAL -		FINISH -	APPLICATION SPEC -	SIZE A2												
		WEIGHT -	CAGE CODE 00779	DRAWING NO C-2064915												
		CUSTOMER DRAWING	SCALE NTS	SHEET 2 OF 2												
			REV C													

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fibre Optic Cable Assemblies](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[7-21002-9](#) [760-1518](#) [FA04390-50-M-72-LC-N](#) [MLB 501 V RED](#) [MLB 501 V YELLOW](#) [1-3636-600-5208](#) [2061529-7](#) [1-6693182-0](#)  
[1754898-1](#) [21055-6](#) [FXBSCSCE2LM002](#) [3000005](#) [3-21053-2](#) [MLB 200/1 V BLACK](#) [MLB 2001 V RED](#) [MLB 2001 V YELLOW](#) [MLB 501](#)  
[V BLACK](#) [5492011-6](#) [106284-7000](#) [5492011-5](#) [5492011-8](#) [5492011-9](#) [8-21007-5](#) [2123524-2](#) [2123524-1](#) [106386-4447](#) [DFSM-SCSC-2M](#)  
[2123909-4](#) [2123909-8](#) [106273-0629](#) [2125046-1](#) [2821236-3](#) [2821310-2](#) [2821310-3](#) [2821313-4](#) [FX2ERLNLNSNM0.5](#) [CF-980062-074](#) [CF-](#)  
[901200-394](#) [CF-980062-073](#) [CF-980062-071](#) [CF-980062-075](#) [CF-980062-072](#) [17-300310-100](#) [2821236-2](#) [2821313-1](#) [G-FC-FC-S-002.0-DX-](#)  
[A-18-Y](#) [G-E2A-E2A-S-003.0-SX-A-18-Y](#) [956-322-502214](#) [FA04474](#) [1083665](#)