

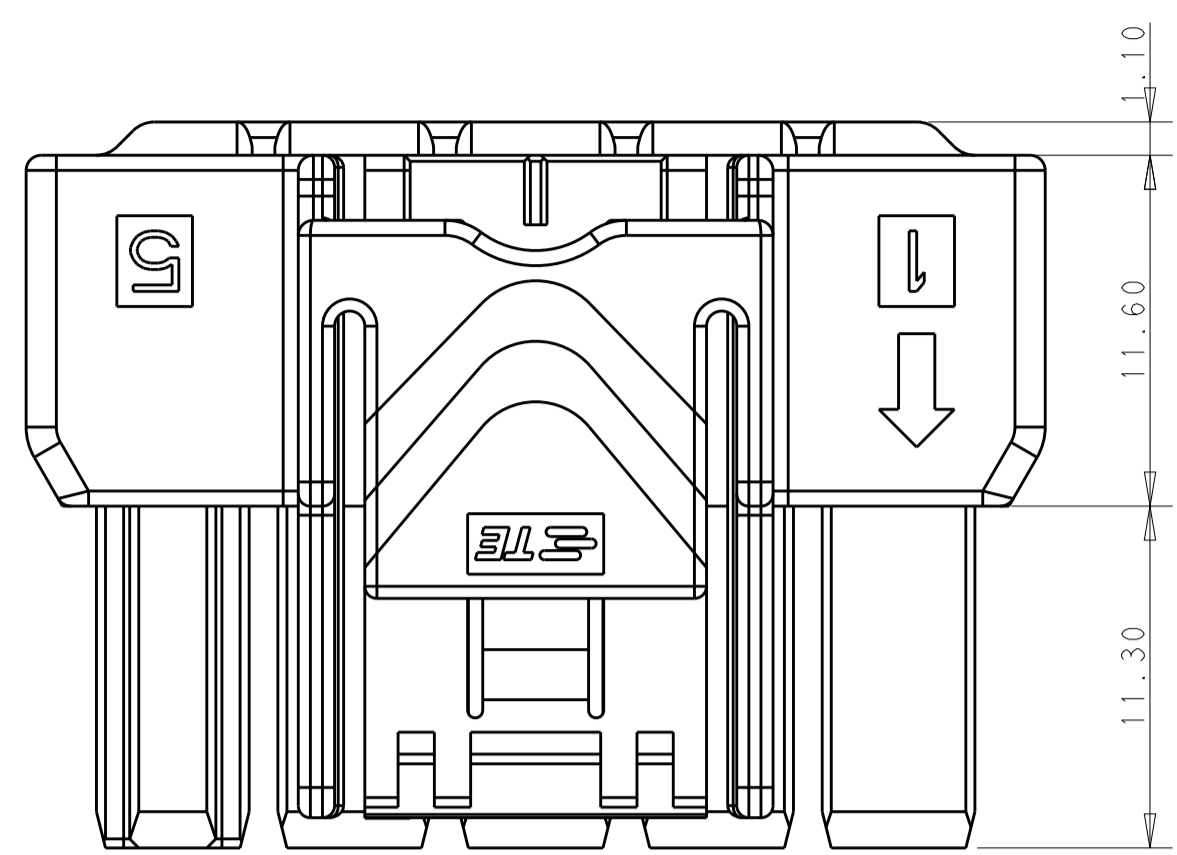
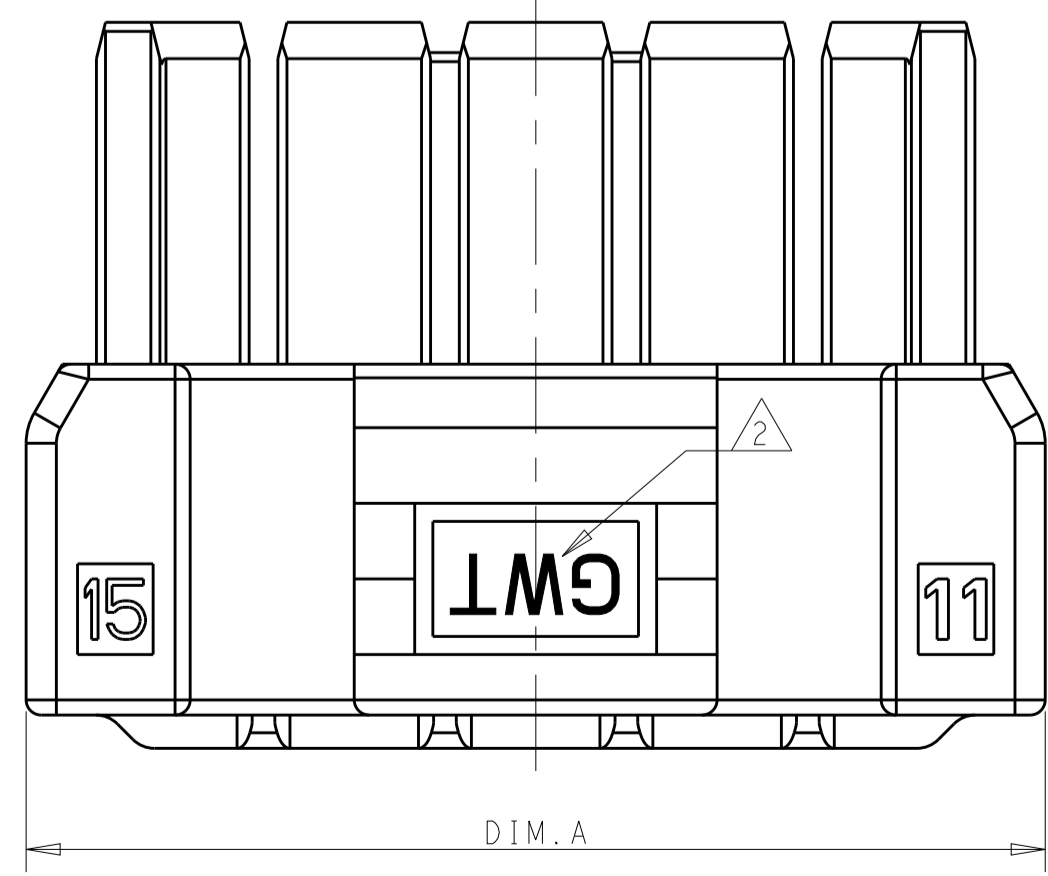
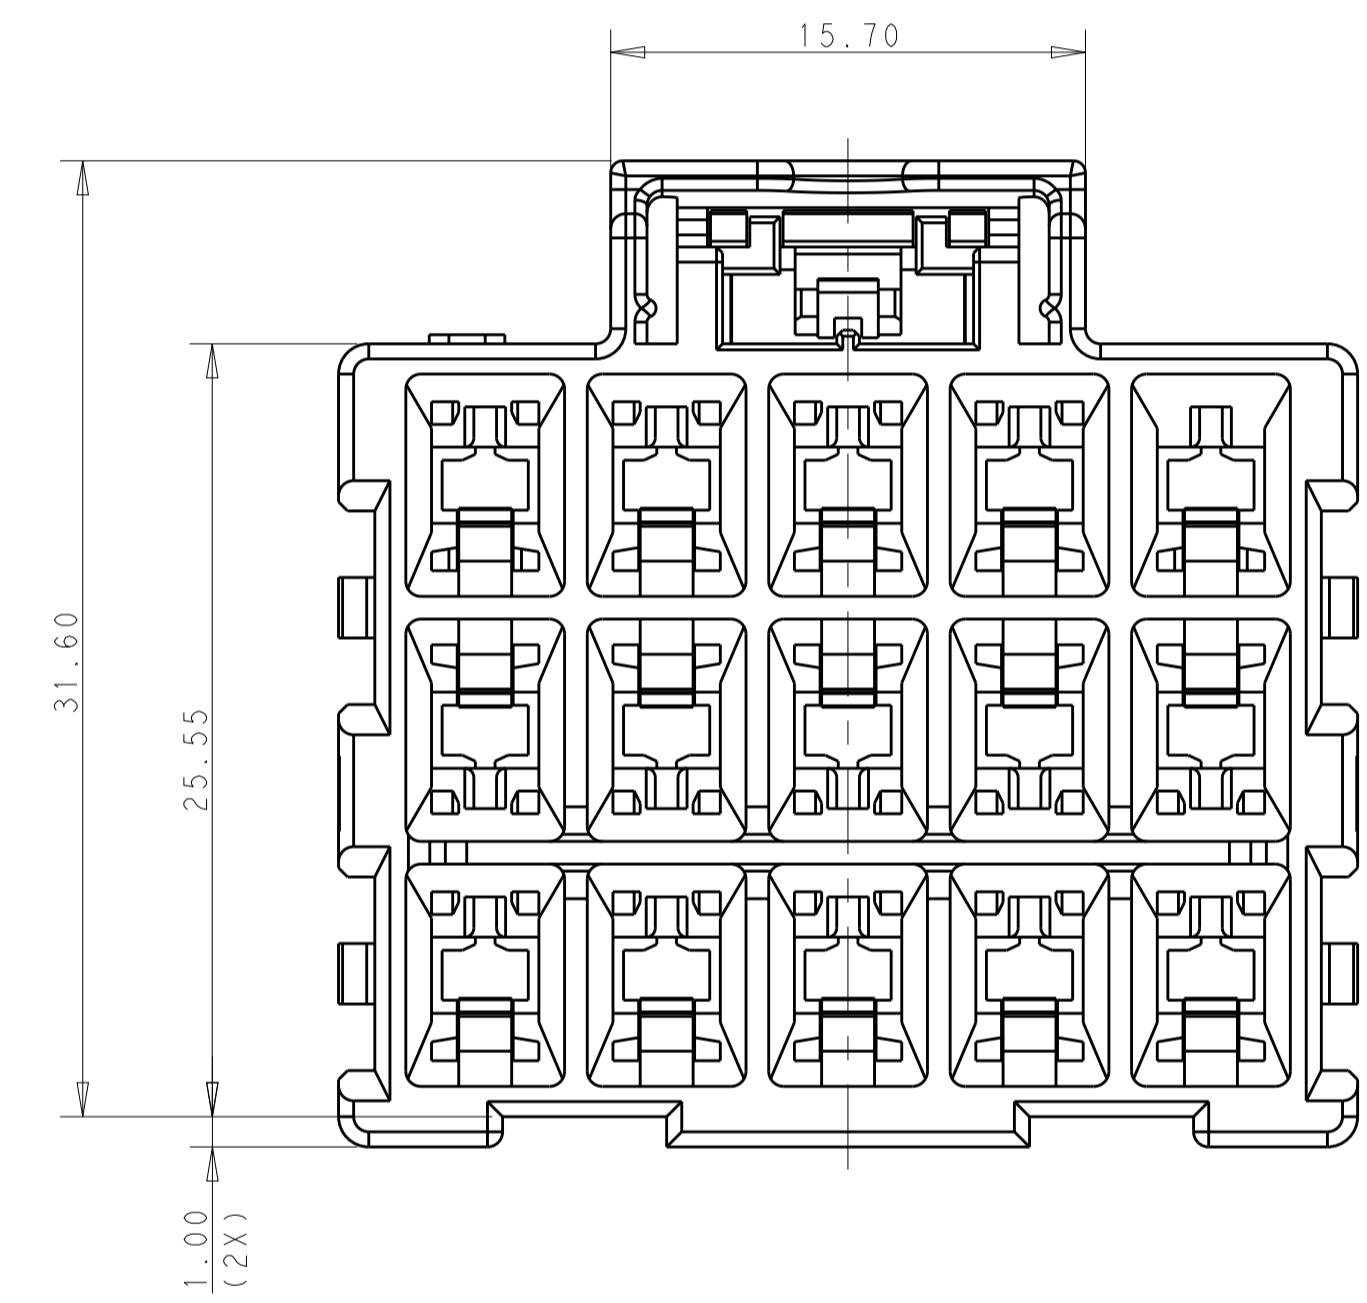


LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	DWN	APVD		
B1		REVISED PER ECO-16-014766	12OCT2016	RS	GJ		

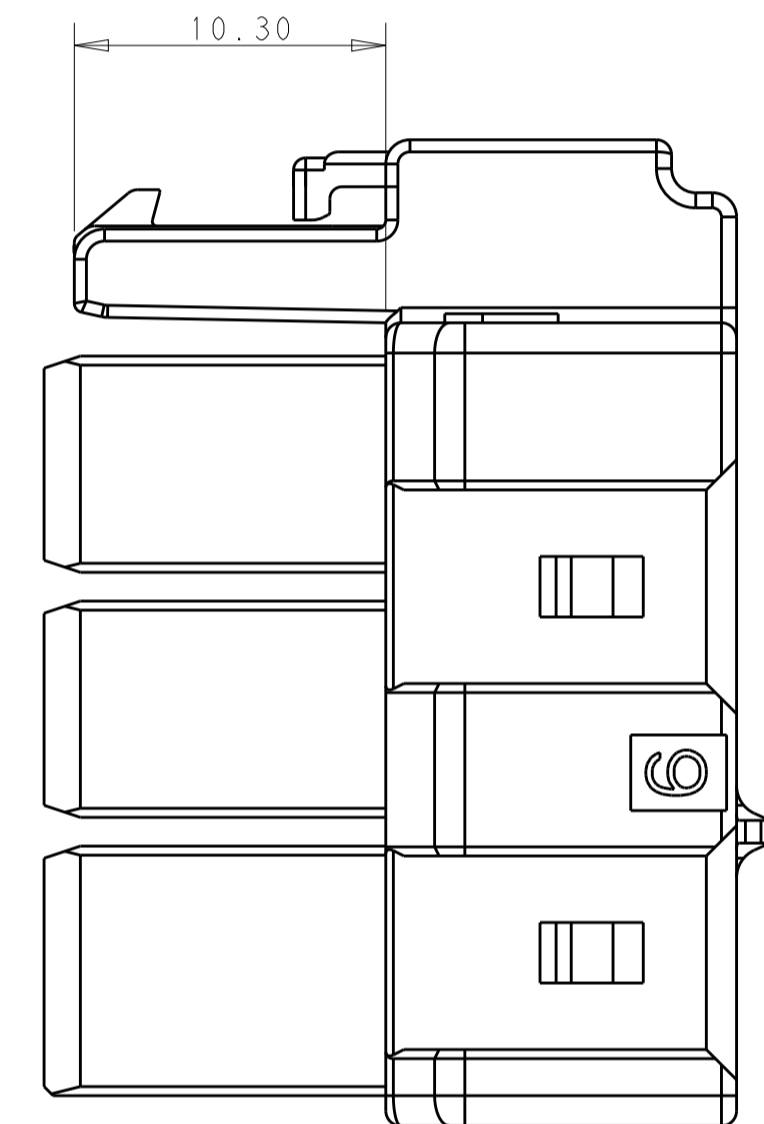

POS.	DIM. A
3*5	33.70
3*4	27.70
3*3	21.70

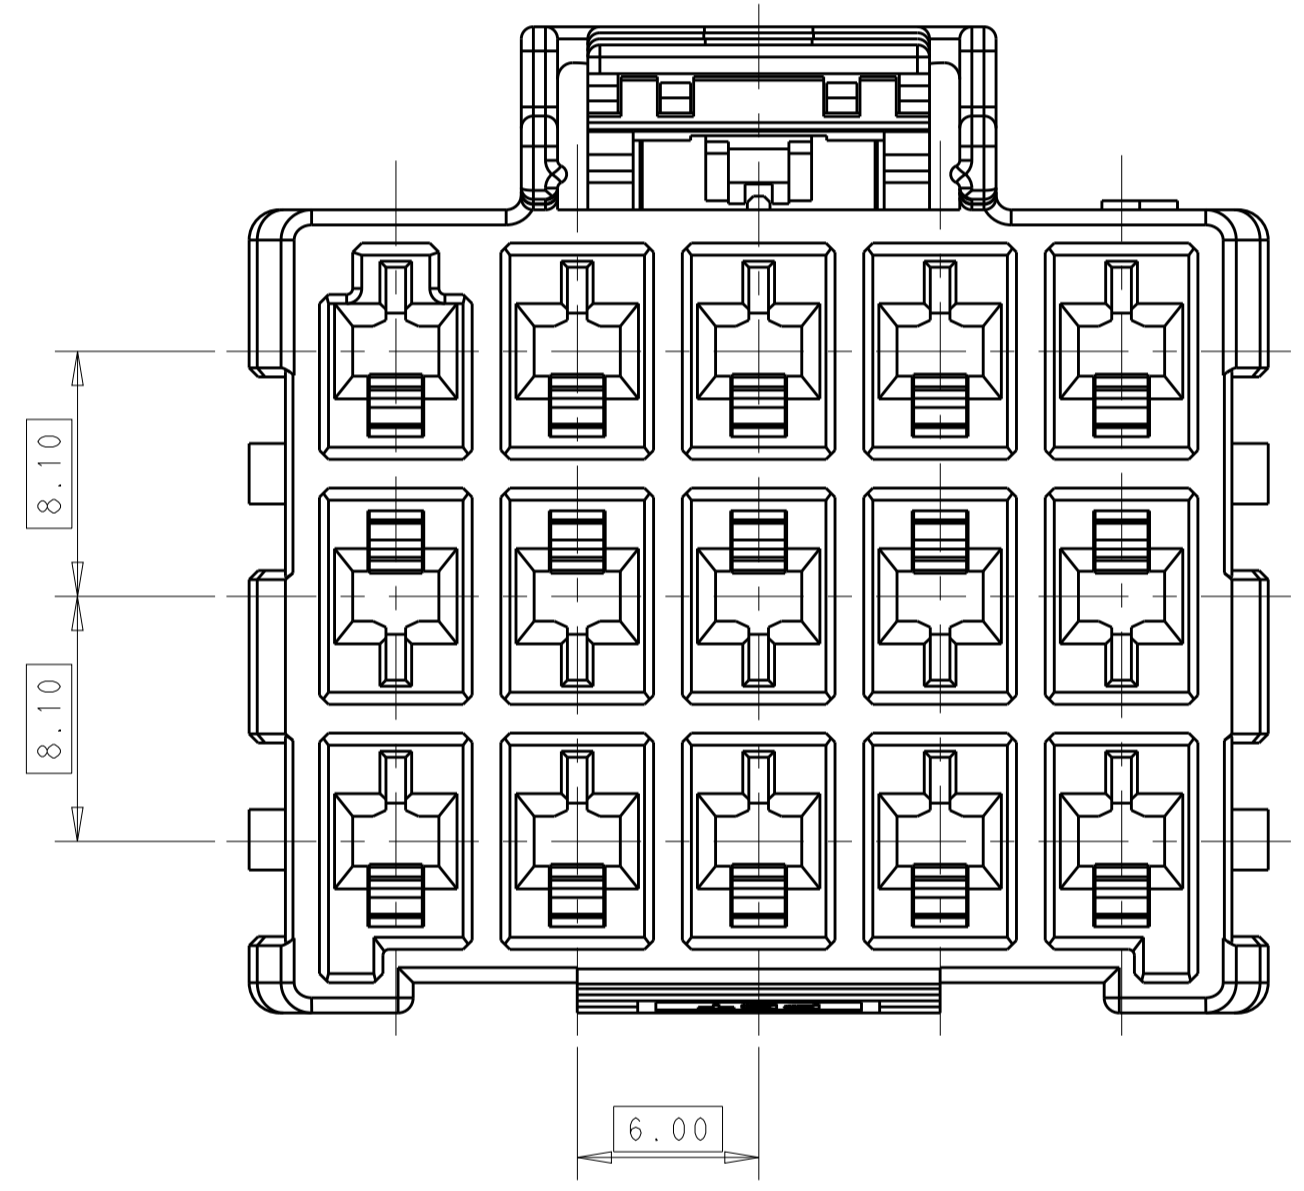

1 MATERIAL:  
 LEVEL A: PA6, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0  
 LEVEL B: PBT, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0

2 MATERIAL MARK:  
 LEVEL A: GWT, LEVEL B: HWT







3. APPLICABLE CONTACT P/N  
 RECEPTACLE CONTACT: 1971237/1971779/81/83/85/87-\*; 2238066-\*

4. MATING CONN. P/N  
 CAP HSG: \*-2232356/60-\*  
 DOUBLE ROW TPA: \*-1971778-\*; SINGLE ROW TPA: \*-1971777-\*

5. THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: TOMMY_WU 26MAR2013	TE Connectivity NAME: PLUG HOUSING, TRIPLE ROW POWER TRIPLE LOCK SIZE: CAGE CODE: DRAWING NO: RESTRICTED TO:
DIMENSIONS:		CHK: HAPYE_WU 26MAR2013	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: YUJHONG_MAO 26MAR2013	
mm	0 PLC ±	PRODUCT SPEC	108-106118
	1 PLC ±0.35	APPLICATION SPEC	114-106118
	2 PLC ±0.25	WEIGHT	A100779C=2232357
	3 PLC ±	Customer Drawing	SCALE 3:1 SHEET 1 OF 2 REV B1
	4 PLC ±		
	ANGLES ±		
MATERIAL	FINISH		

REVISONS		DATE	OWN	APVD
LOC	DIST			

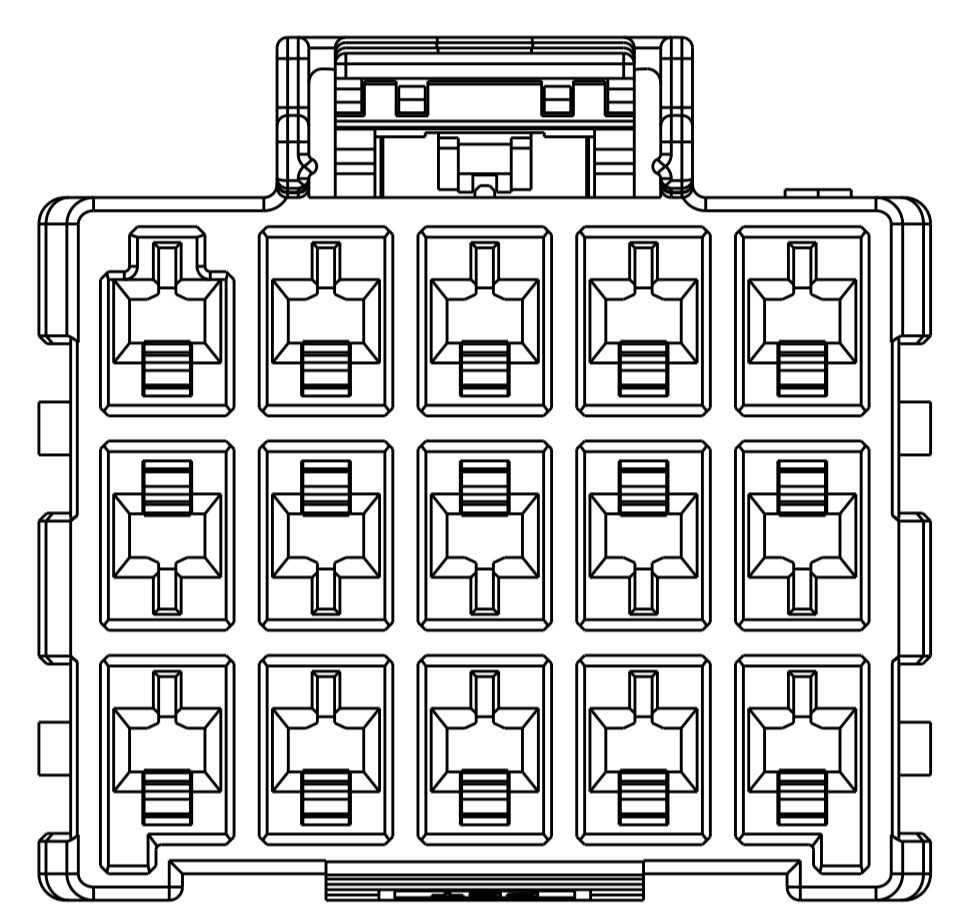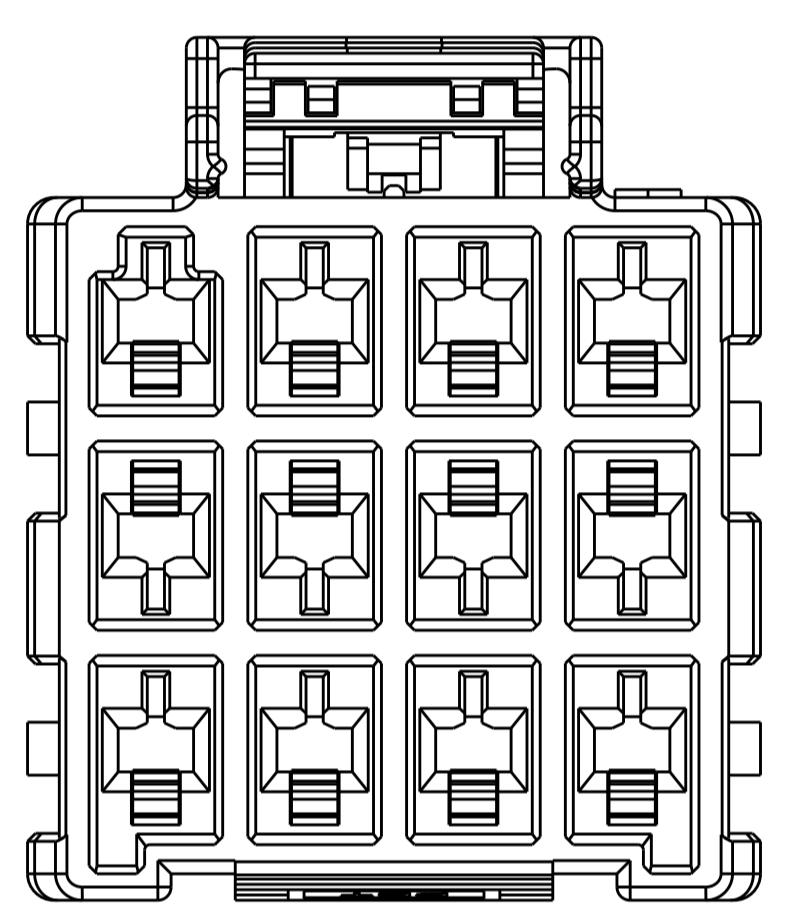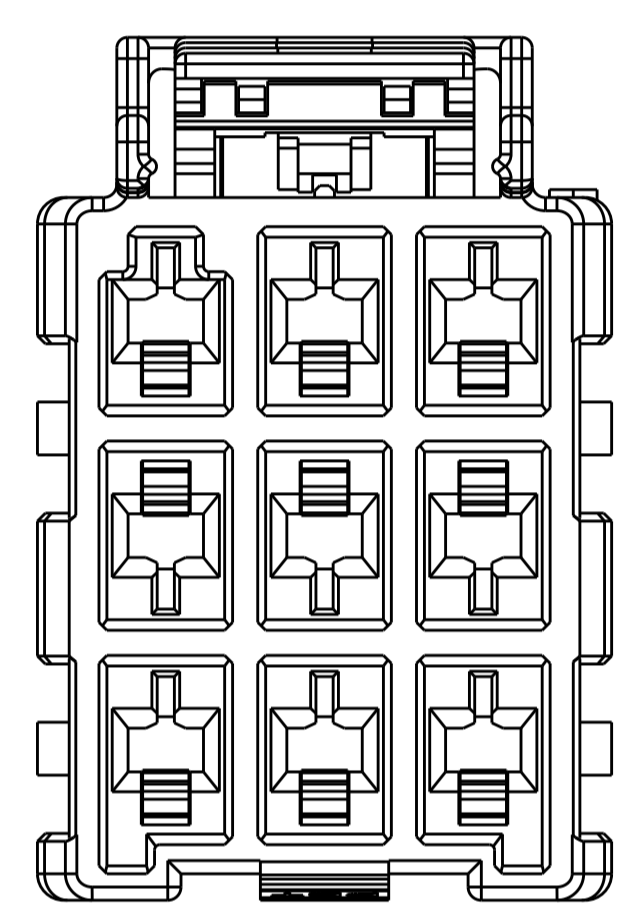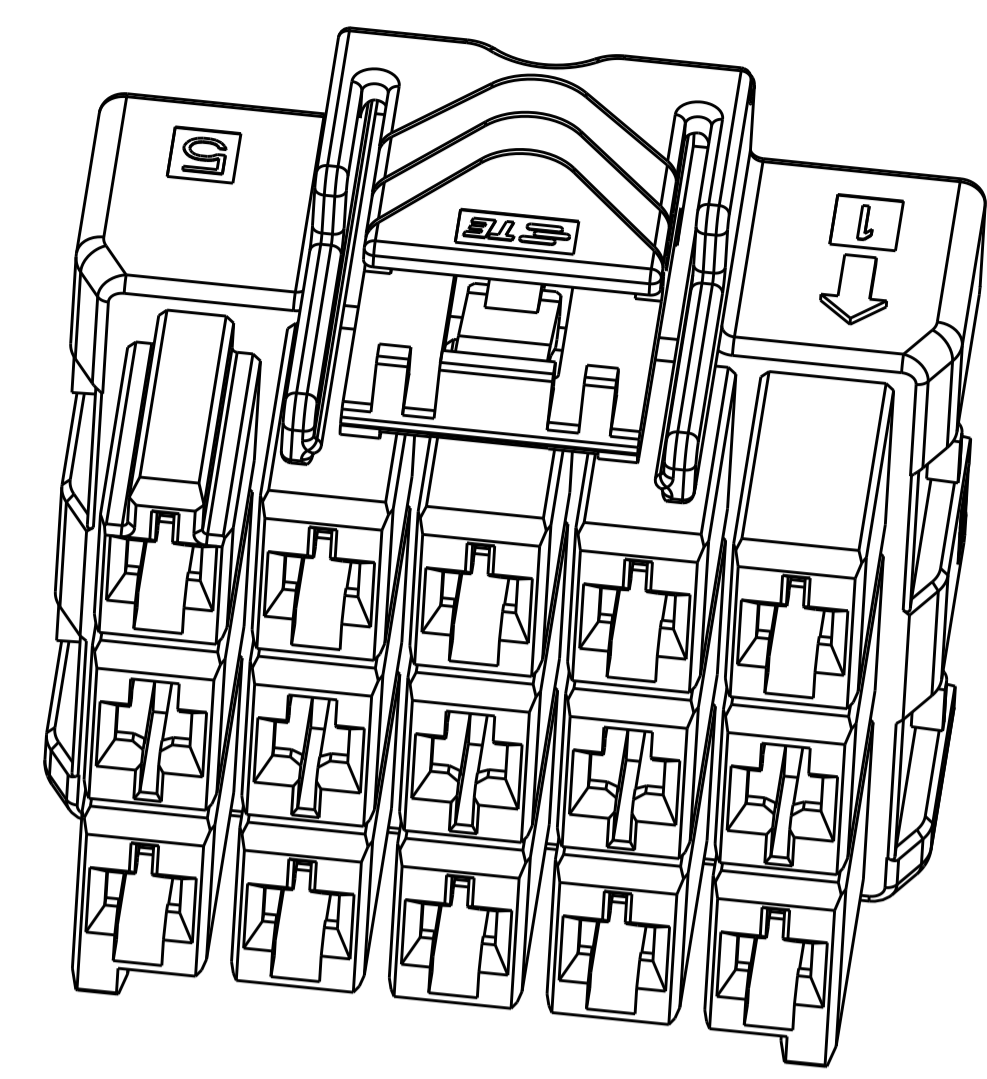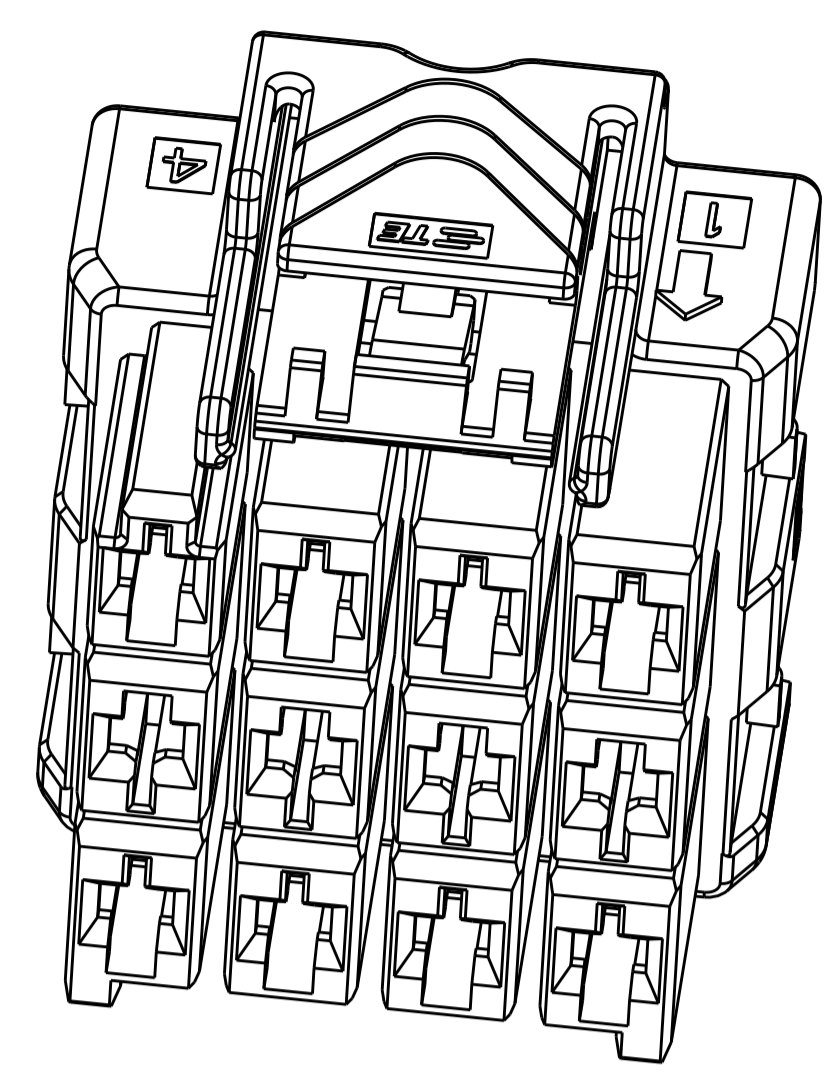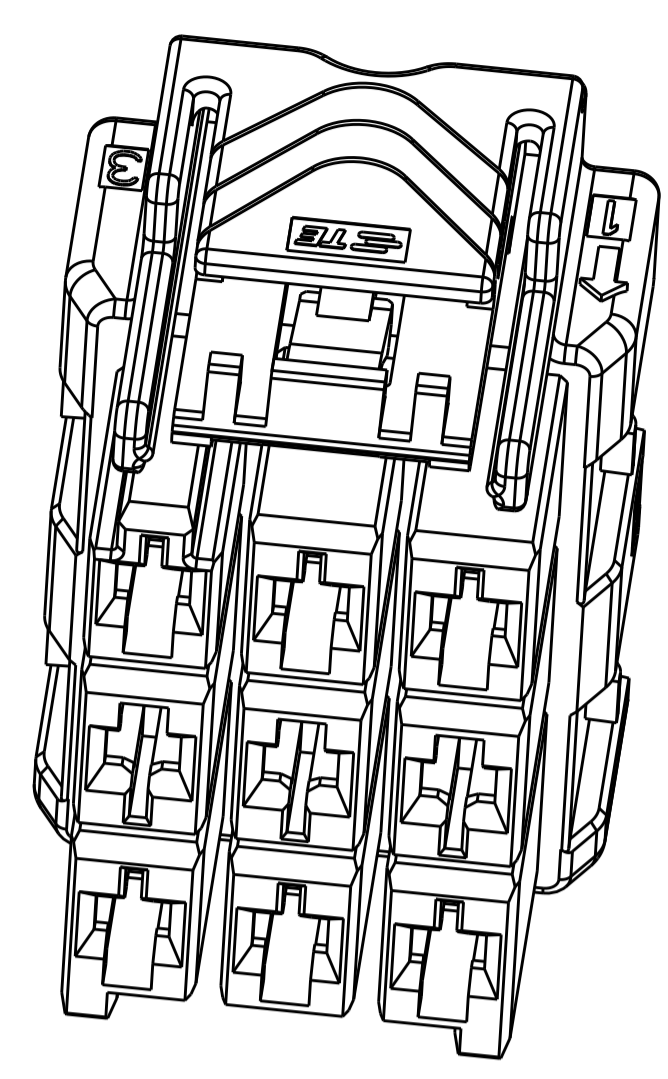


POSITION	LEVEL	MATERIAL	COLOR	KEY	P/N
3*5	LEVEL A	DARK GREY		KEY A	5-2232357-7
		BROWN		KEY B	6-2232357-7
	GREEN		KEY C	7-2232357-7	
	ORANGE		KEY D	8-2232357-7	
3*4	LEVEL A	BLACK		KEY A	1-2232357-5
		DARK GREY		KEY A	5-2232357-4
	BROWN		KEY B	6-2232357-4	
	GREEN		KEY C	7-2232357-4	
3*3	LEVEL A	ORANGE		KEY D	8-2232357-4
		BLACK		KEY A	1-2232357-4
	DARK GREY		KEY A	5-2232357-3	
	BROWN		KEY B	6-2232357-3	
LEVEL B	GREEN		KEY C	7-2232357-3	
	ORANGE		KEY D	8-2232357-3	
POS.	LEVEL B	BLACK		KEY A	1-2232357-6


3\*3 POSITIONS

3\*4 POSITIONS


3\*5 POSITIONS

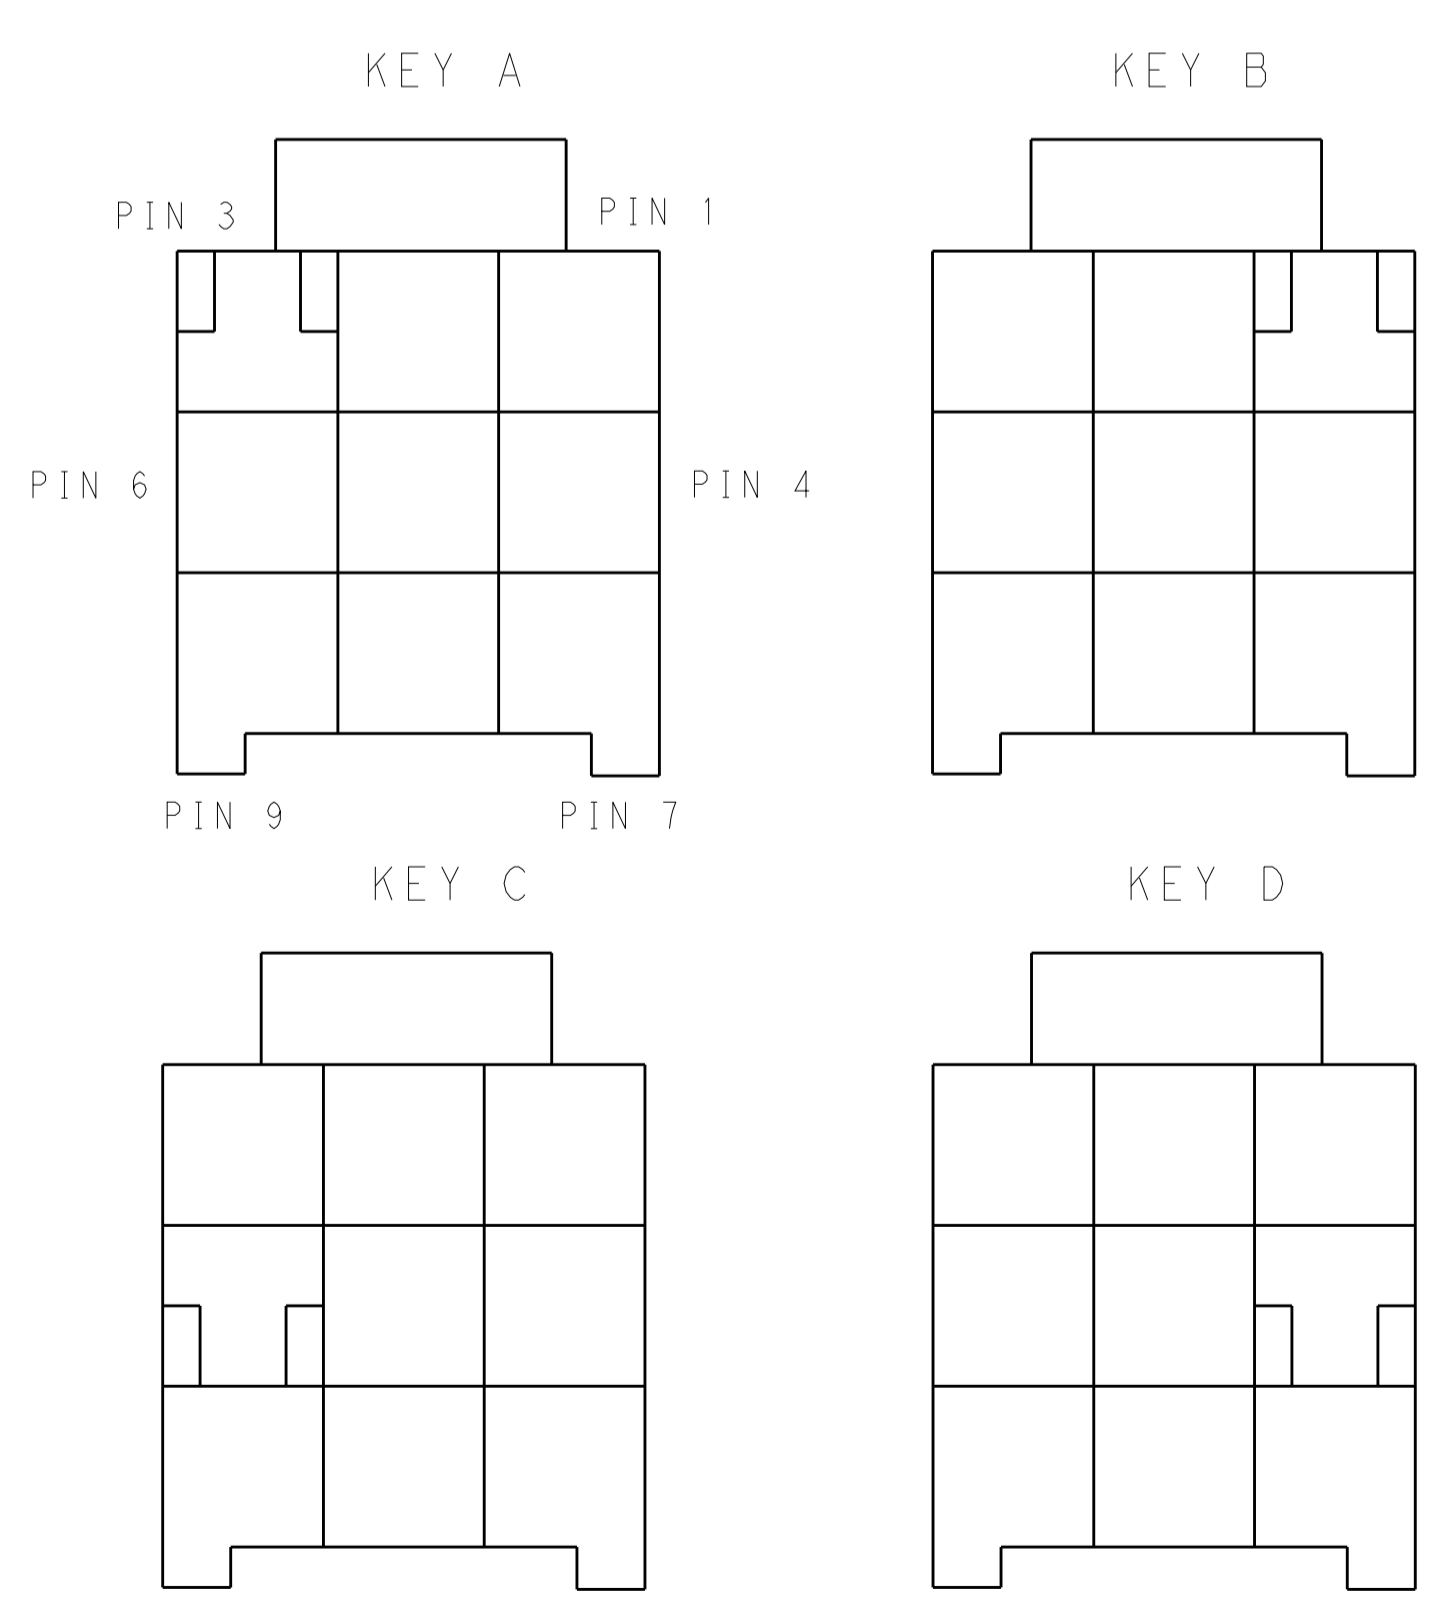

KEYING FOR 3\*3 POS.

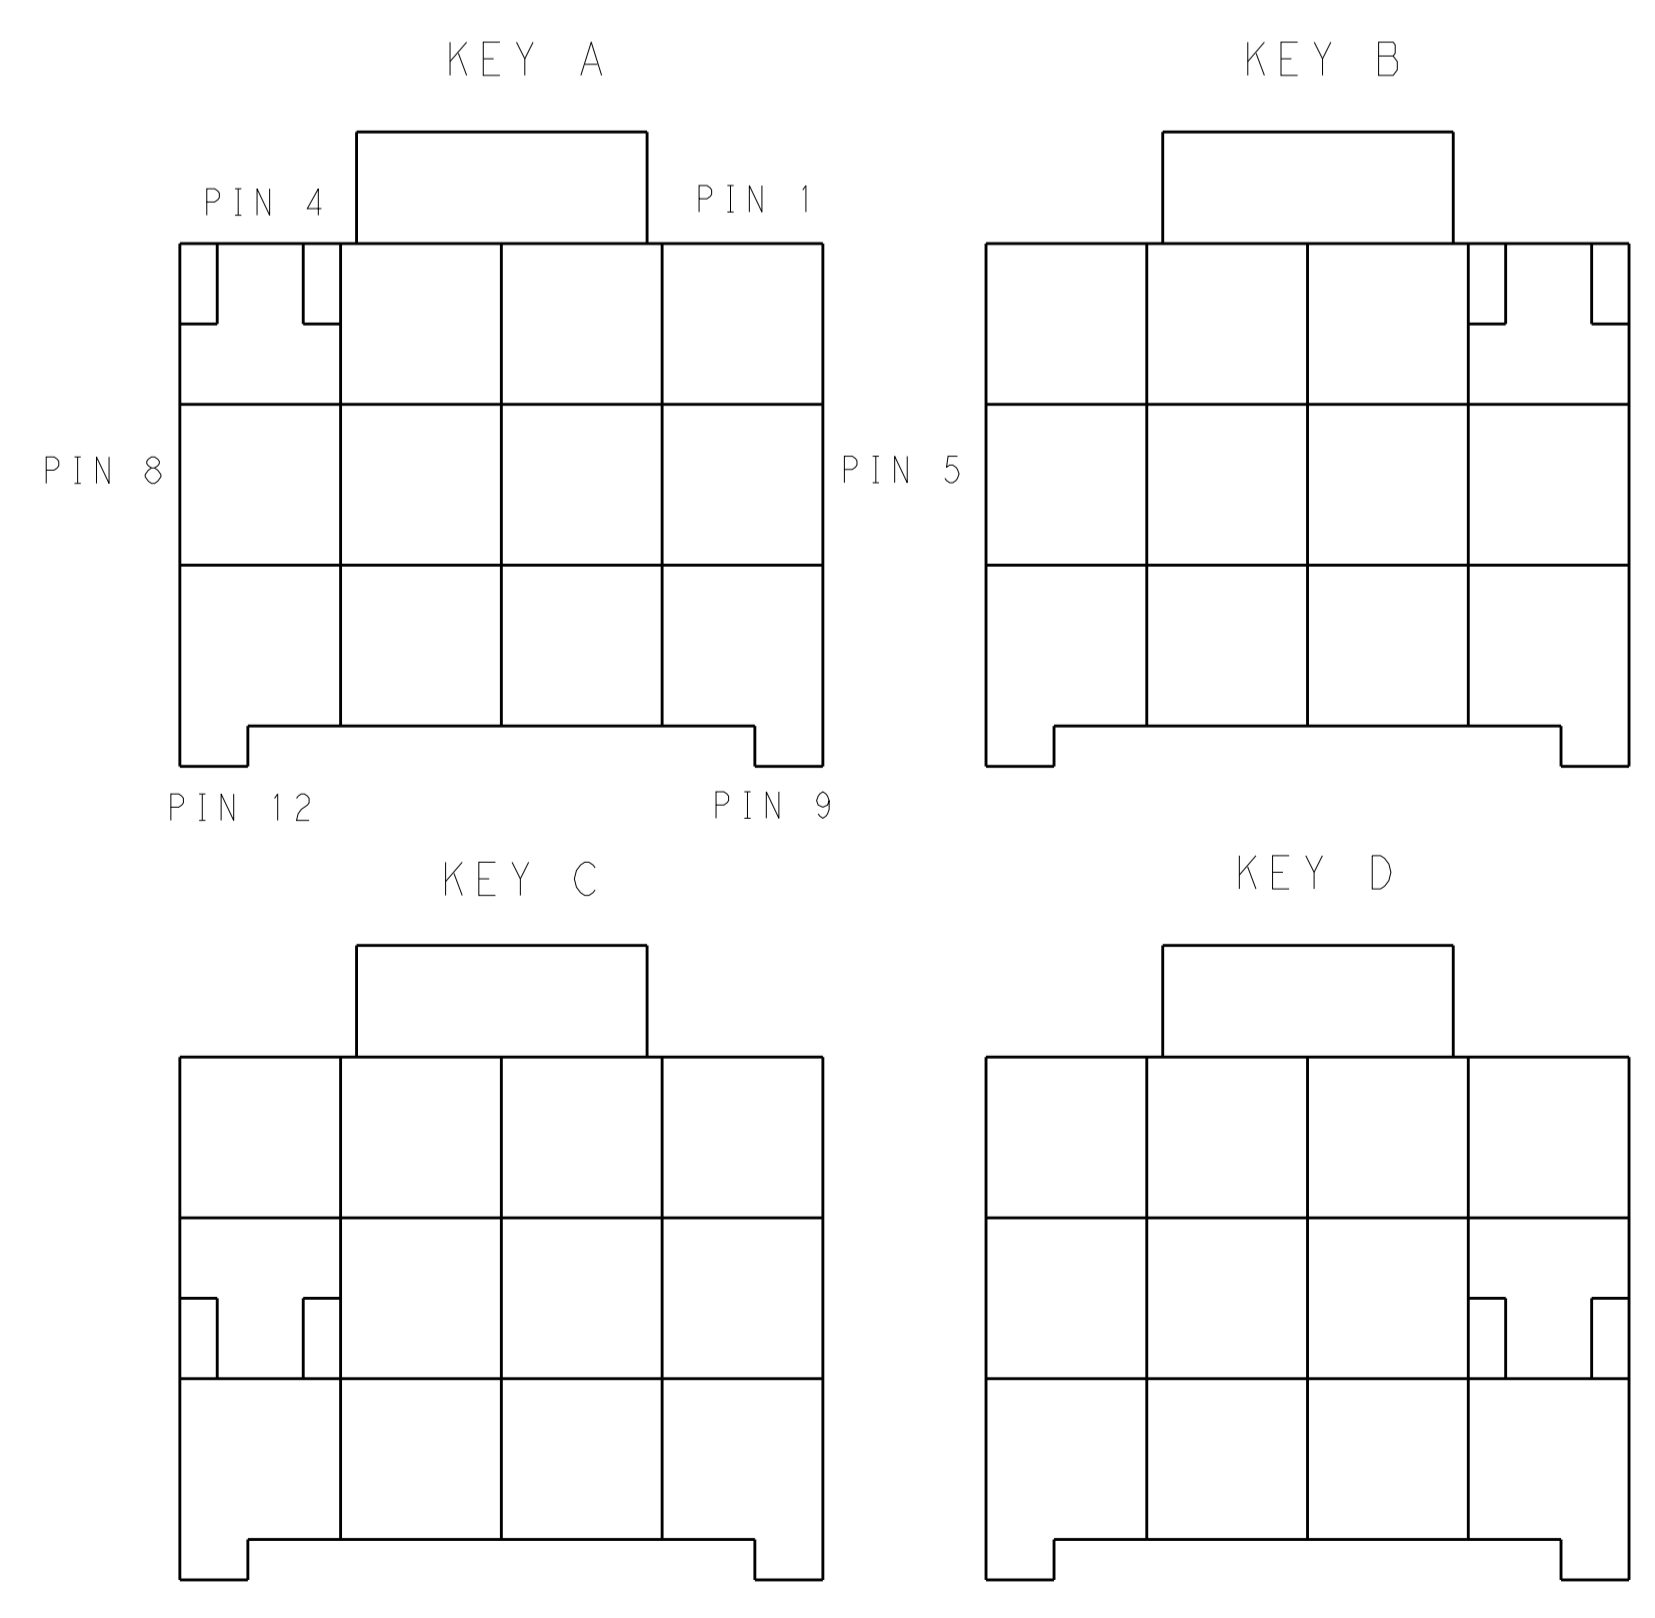

KEYING FOR 3\*4 POS.

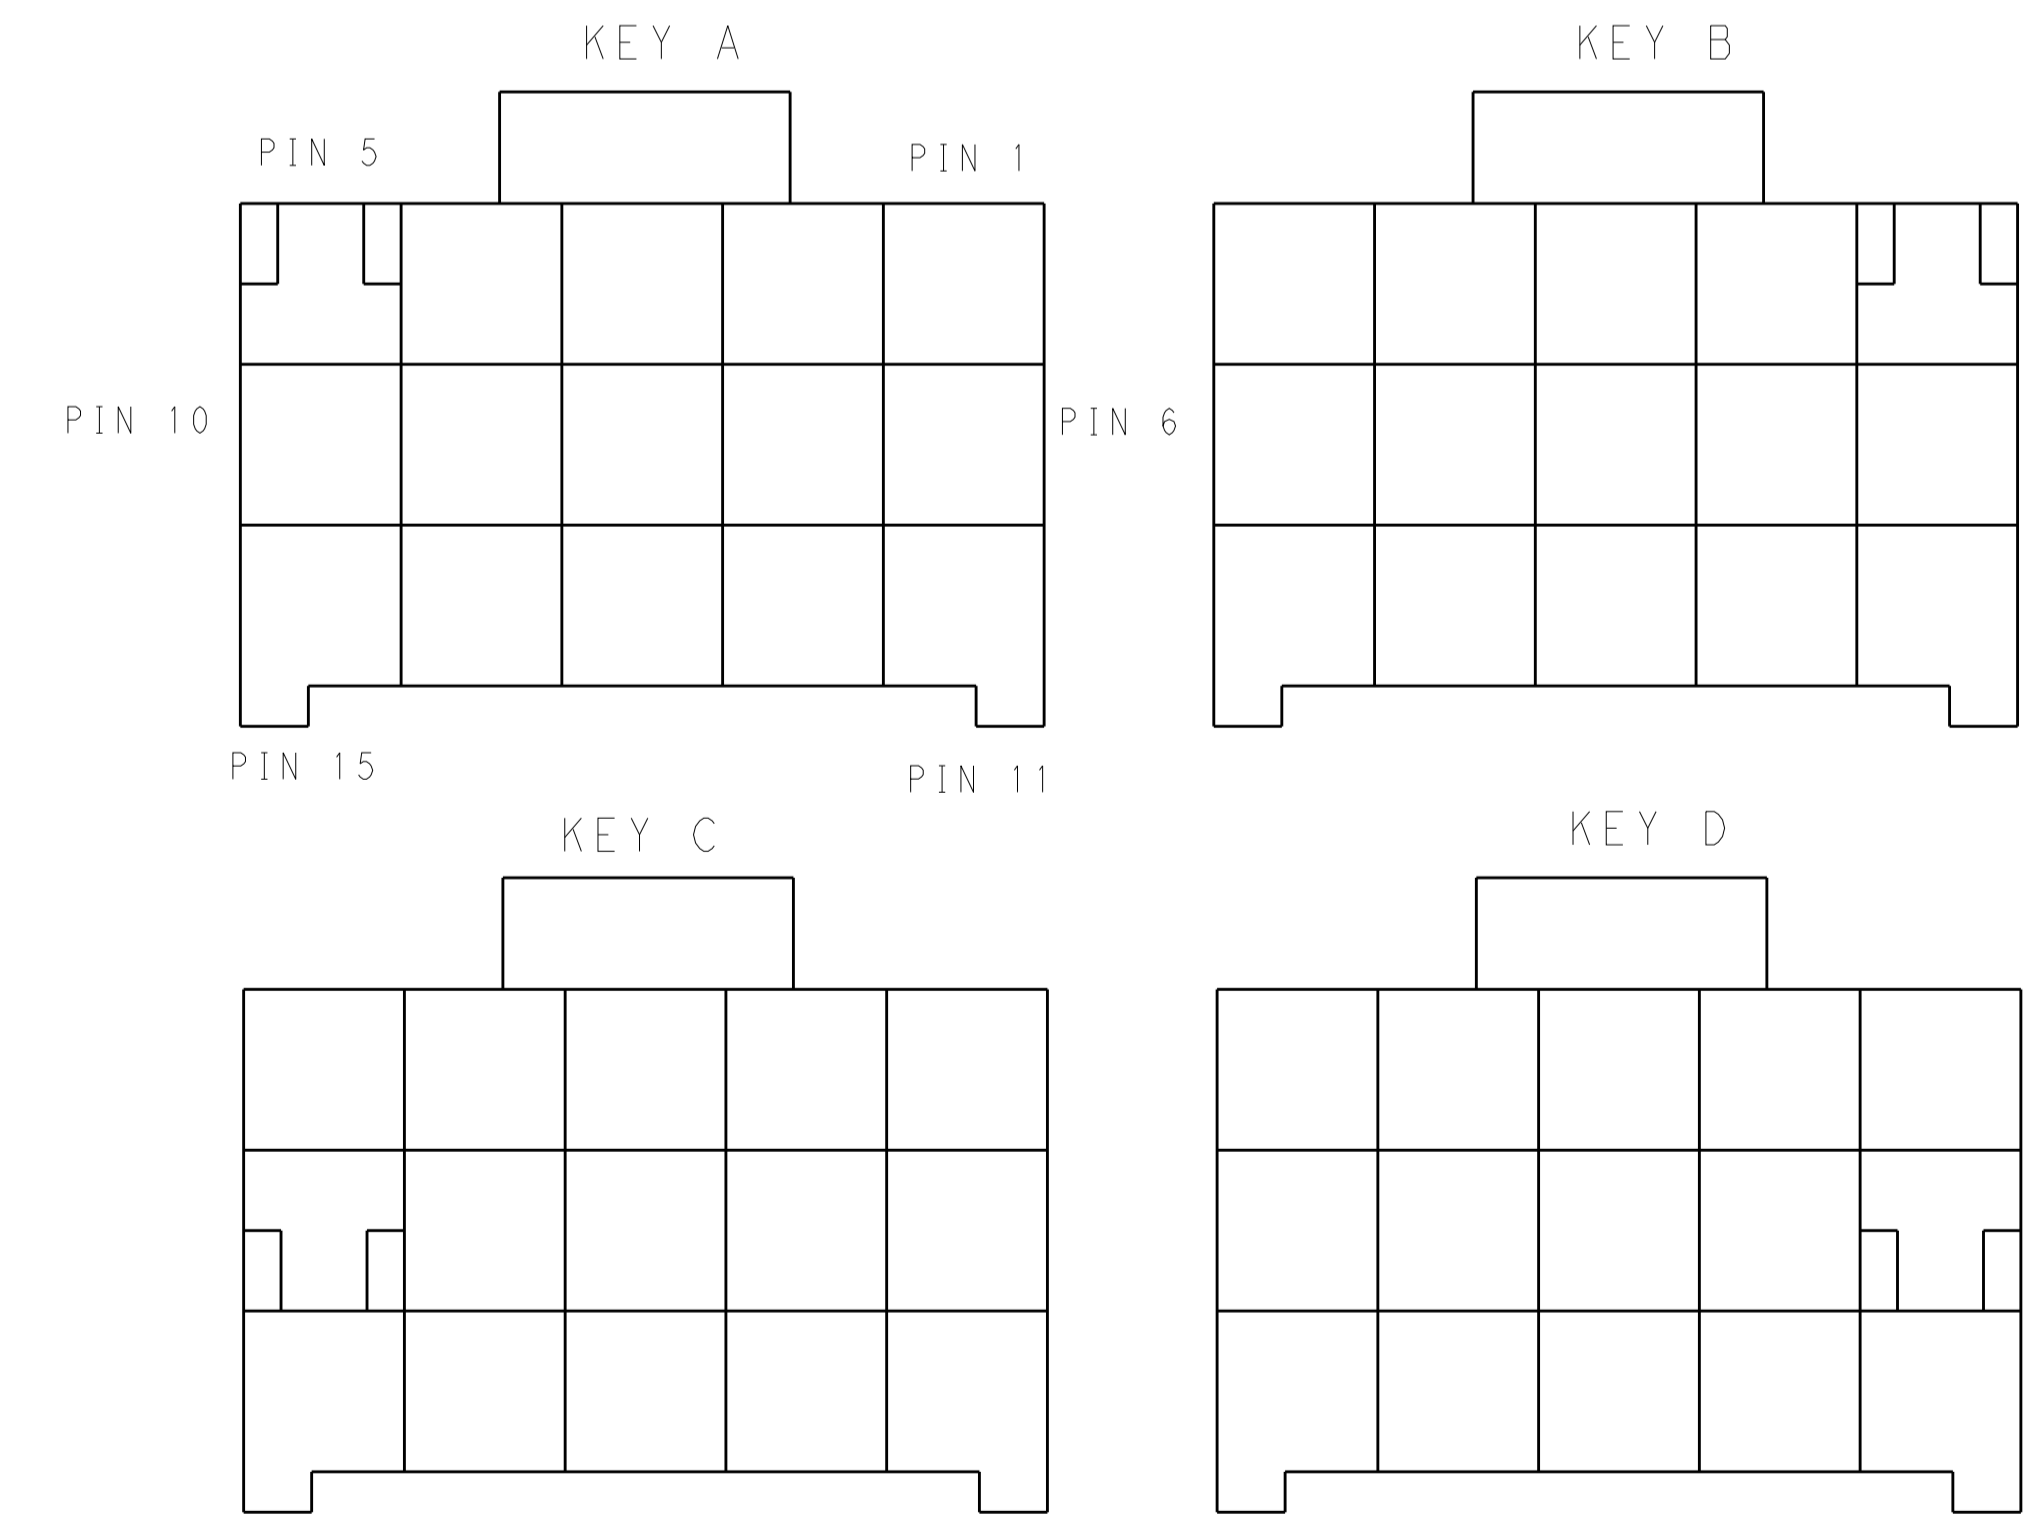

KEYING FOR 3\*5 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: TOMMY_WU 26MAR2013	TE Connectivity
DIMENSIONS: mm		CHK: HAPYE_WU 26MAR2013	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: YIHONG_MAO 26MAR2013	NAME: PLUG HOUSING, TRIPLE ROW POWER TRIPLE LOCK
0 PLC ±.1		PRODUCT SPEC: 108-106118	
1 PLC ±0.35		APPLICATION SPEC: 114-106118	SIZE: A1 00779 ©=2232357
2 PLC ±0.25		WEIGHT: -	
3 PLC ±.1		FINISH: -	SCALE: - SHEET 2 OF 2 REV B1
4 PLC ±.1		MATERIAL: -	
ANGLES ±.1		Customer Drawing	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[D38999/24FJ4AN](#) [570416-000](#) [CLTEQ-M81CE-SSRELAY-4-20V](#) [4-1195131-0](#) [650069-000](#) [SMD100-2](#) [358838-000](#) [CB-1022B-78](#)  
[RM707012](#) [RP410012](#) [MMS42](#) [1-640426-8](#) [2EDL4CM](#) [DTS20W19-11PD-3028-LC](#) [RM202615](#) [NC6-P104-06](#) [MSPS103B](#) [DTS26F21-41HE-LC](#) [DTS26F21-41AE](#) [DTS26F21-41PE-LC](#) [DTS26F21-11SE-3028-LC](#) [30DCB6](#) [1932144-1](#) [293545-4](#) [LVR125S](#) [MS27466T25F4PB](#)  
[CKB-38-78010](#) [TR04AI-TINELLOCKRING](#) [1206SFF150F/63-2](#) [D38999/20JB35HA](#) [TE1500A2R2J](#) [D38999/20WC8BB](#) [DTS24F19-11SC-3028-LC](#) [D38999/24WG11HA](#) [D38999/24WG11HN](#) [MS27467T21F11H](#) [DJT16E21-11HA](#) [MS27467T21F35J](#) [MS27467T21F11J](#)  
[MS27467T21F16H-LC](#) [MS27467T21F35H](#) [MS27467T21F41H-LC](#) [1206SFH150F/24-2](#) [RP330024](#) [DJT16E21-11PA-LC](#) [DJT16E21-11HA-LC](#) [DJT16E21-11AA](#) [MS27467T21B11JA](#) [DJT16E21-11JA](#) [MS27467T21B11JA-LC](#)