

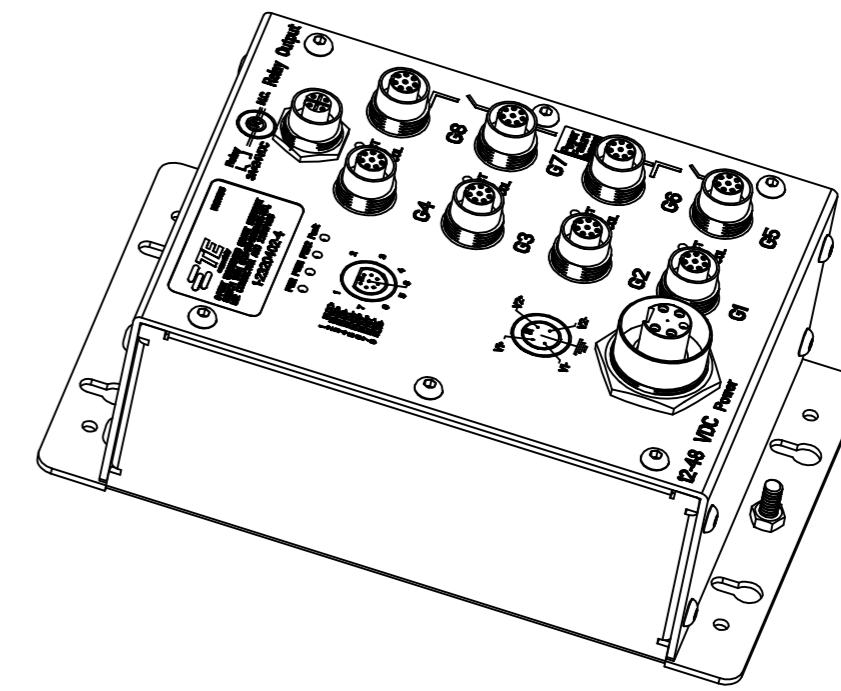
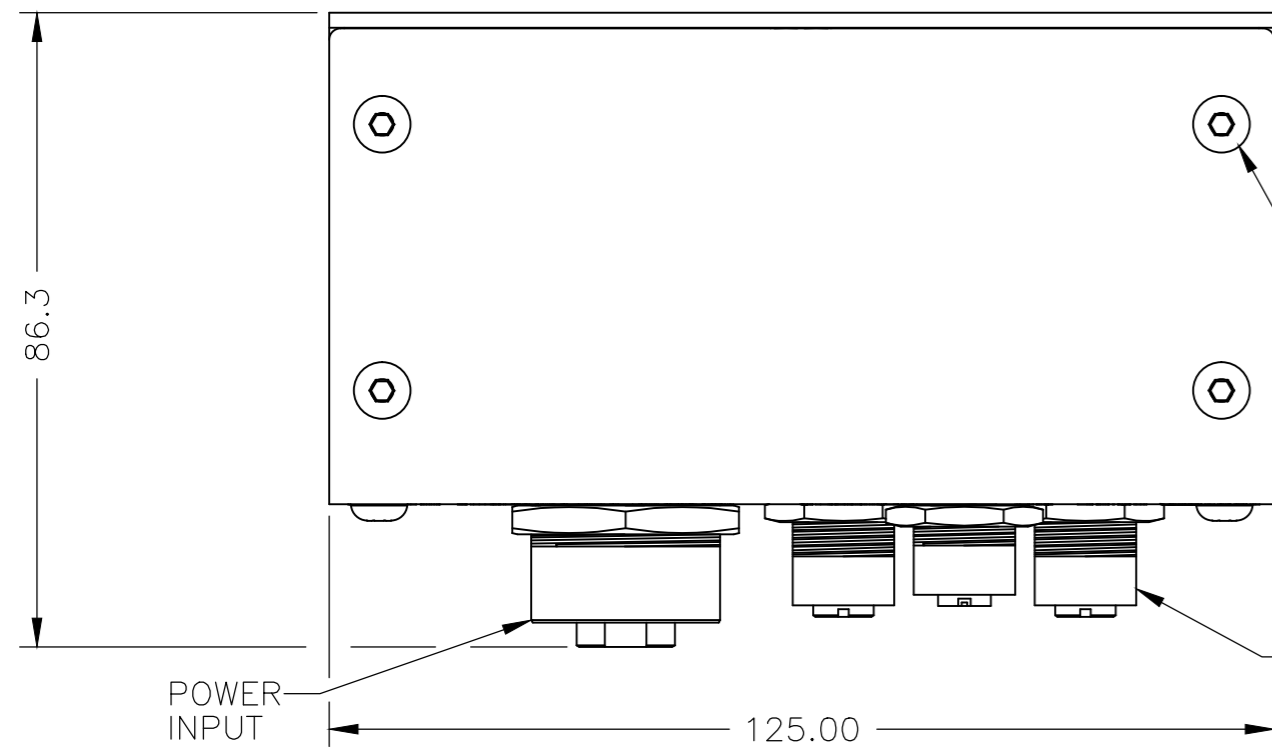


THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
© COPYRIGHT - TE Connectivity		ALL RIGHTS RESERVED.	
PROJECT	PRJ-17-000905364		
PART NO.	X-2320402-X		
DESCRIPTION	8-PORT 1GBPS SWITCH		
CUSTOMER	GENERAL MARKET		

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
A		NEW RELEASE	11JUL2017	KK ES

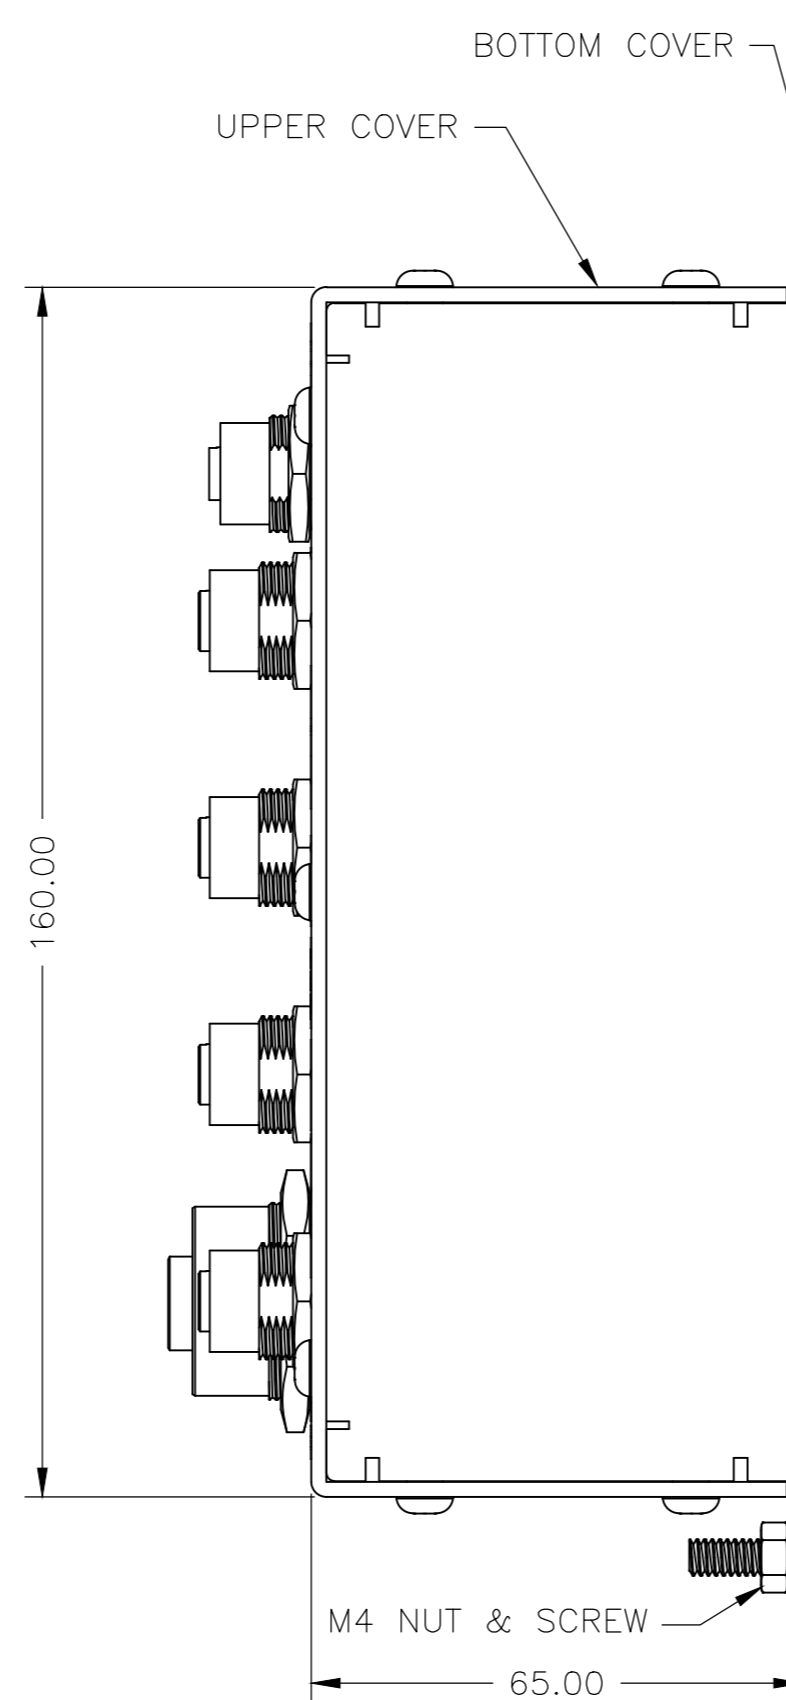

PICTORIAL VIEW

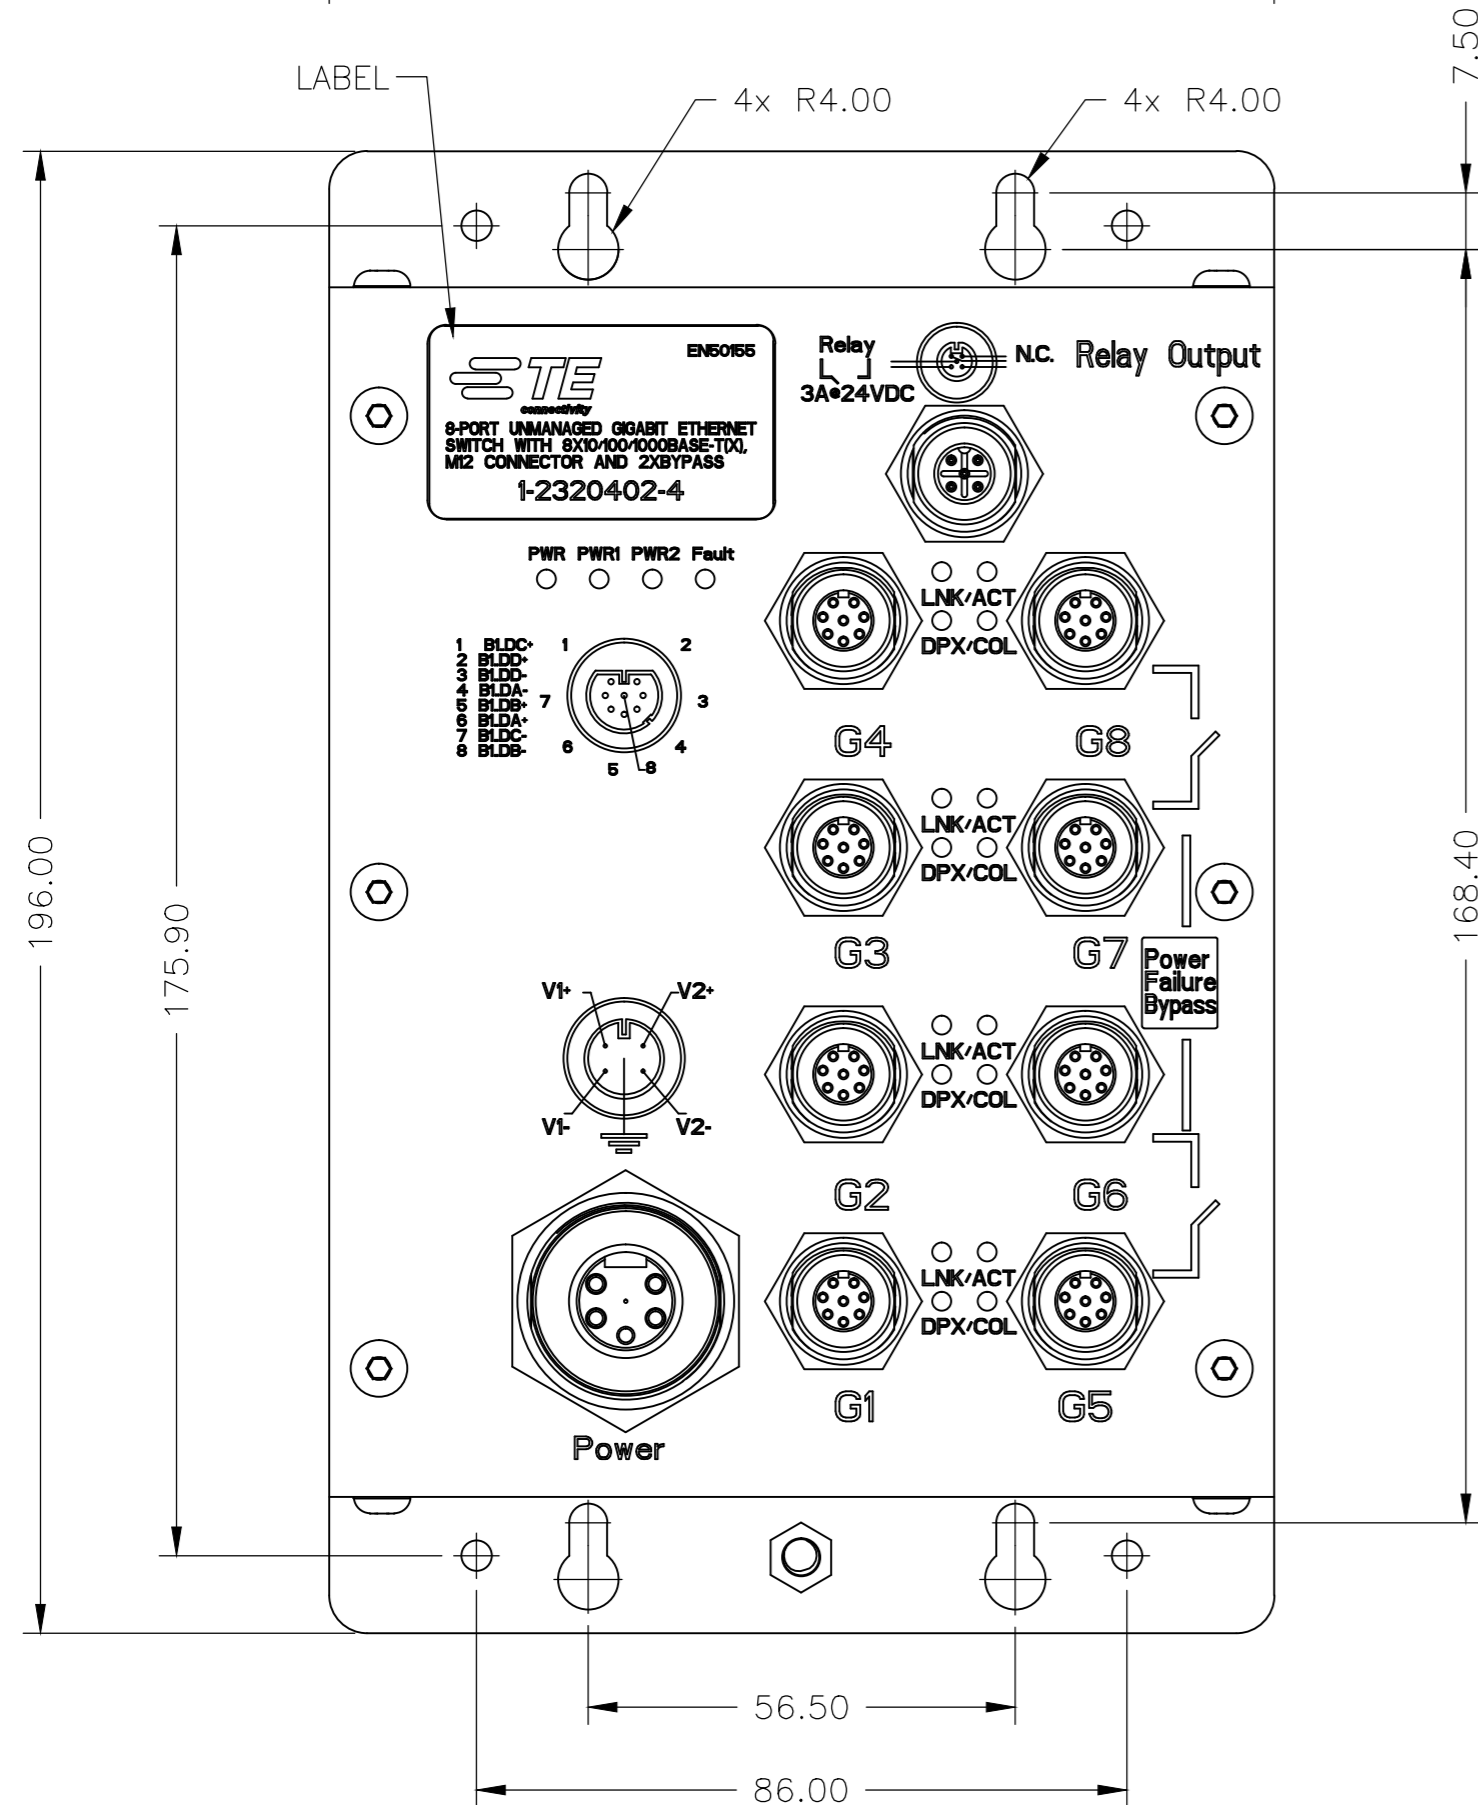

SL.NO.	PART NO.	DESCRIPTION	NO. OF PORTS	POE PORTS	SPEED	BYPASS	INPUT POWER
4	1-2320402-4	EN50155 8-PORT UNMANAGED GIGABIT ETHERNET SWITCH WITH 8X10/100/1000BASE-T(X), M12 CONNECTOR, 12-48VDC INPUT	8	-	10/100/1000 BASE-T(X)	NO	12-48 VDC
3	1-2320402-3	EN50155 8-PORT UNMANAGED GIGABIT ETHERNET SWITCH WITH 8X10/100/1000BASE-T(X), M12 CONNECTOR AND 2XBYPASS INCLUDED, 72-110VDC INPUT	8	-	10/100/1000 BASE-T(X)	2X	72-110 VDC
2	1-2320402-2	EN50155 8-PORT UNMANAGED GIGABIT ETHERNET SWITCH WITH 8X10/100/1000BASE-T(X), M12 CONNECTOR, 72-110VDC INPUT	8	-	10/100/1000 BASE-T(X)	NO	72-110 VDC
1	1-2320402-1	EN50155 8-PORT UNMANAGED GIGABIT ETHERNET SWITCH WITH 8X10/100/1000BASE-T(X), M12 CONNECTOR AND 2XBYPASS INCLUDED, 12-48VDC INPUT	8	-	10/100/1000 BASE-T(X)	2X	12-48 VDC

AVAILABLE MODELS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	KIRAN K	05MAY2017	 TE Connectivity	8-PORT 1GBPS SWITCH		
DIMENSIONS: mm		CHK	KIRAN K	05MAY2017		NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	E STELLINGA	05MAY2017		DRAWING NO		
0 PLC ± -		PRODUCT SPEC		SCALE				
1 PLC ± -		APPLICATION SPEC		CAGE CODE			RESTRICTED TO	
2 PLC ± -		WEIGHT		DRAWING NO				
3 PLC ± -		MATERIAL		CAGE CODE			REV	
4 PLC ± -		FINISH		DRAWING NO				
ANGLES ± -		CUSTOMER DRAWING		SCALE			SHEET	
FINISH		CUSTOMER DRAWING		SCALE				
				A2 00779 C=2320402			1 of 2	
				SCALE				
				NTS			A	
				SHEET				

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - TE Connectivity ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
-	-	SEE SHEET 1	-	-



PROJECT	PRJ-17-000905364
PART NO.	X-2320402-X
DESCRIPTION	8-PORT 1GBPS SWITCH
CUSTOMER	GENERAL MARKET

SPECIFICATIONS:				
MODELS	1-2320402-1	1-2320402-2	1-2320402-3	1-2320402-4
POWER INPUT	DUAL DC INPUTS. 12~48VDC, ON 5-PIN M23 CONNECTOR	DUAL DC INPUTS. 72~110VDC, ON 5-PIN M23 CONNECTOR	DUAL DC INPUTS. 72~110VDC, ON 5-PIN M23 CONNECTOR	DUAL DC INPUTS. 12~48VDC, ON 5-PIN M23 CONNECTOR
POWER CONSUMPTION	6.24 WATTS	7.88 WATTS	11.24 WATTS	2.88 WATTS WATTS
PORTS				
10/100/1000BASE-T(X) PORTS IN M12	8 X M12 CONNECTOR (8-PIN A-CODING, BYPASS FUNCTION INCLUDED BY LAST 4 PORTS)	8 X M12 CONNECTOR (8-PIN A-CODING)	8 X M12 CONNECTOR (8-PIN A-CODING, BYPASS FUNCTION INCLUDED BY LAST 4 PORTS)	8 X M12 CONNECTOR (8-PIN A-CODING)
STORAGE TEMPERATURE	-40°C TO 85°C (-40°F TO 185°F)			
OPERATING TEMPERATURE	-40°C TO 75°C (-40°F TO 167°F)			
OPERATING HUMIDITY	5% TO 95% NON-CONDENSING			
REGULATORY APPROVALS				
EMI	FCC Part 15, CISPR (EN55022) class A, EN50155 (EN50121-3-2, EN55011, EN50121-4)			
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11			
SHOCK	IEC60068-2-27, EN61373			
VIBRATION	IEC60068-2-6, EN61373			
FREE FALL	IEC60068-2-32			
ETHERNET STANDARDS	IEEE 802.3 FOR 10BASE-T			
	IEEE 802.3U FOR 100BASE-TX			
	IEEE 802.3AB FOR 1000BASE-T			
	IEEE 802.3X FOR FLOW CONTROL			
MAC TABLE	8K MAC ADDRESSES			
ENCLOSURE	IP-40			
WEIGHT	1007g	1195g,	1235g,	967g,

NOTES:

MAIN FEATURES:

- * LEADING EN50155-COMPLIANT ETHERNET SWITCH FOR INDUSTRIAL APPLICATIONS, SUCH AS ROLLING STOCK, VEHICLE, AND RAILWAY APPLICATIONS.
- * SUPPORT DUAL POWER INPUTS FOR POWER REDUNDANCY.
- * SUPPORT AUTO-NEGOTIATION AND AUTO-MDI/MDI-X.
- * SUPPORT STORE, FLOW CONTROL AND FORWARD TRANSMISSION.
- * BUILT-IN 2 SETS OF BYPASS PORTS.
- * M12 CONNECTORS TO GUARANTEE RELIABLE OPERATION AGAINST ENVIRONMENTAL DISTURBANCES.
- * RIGID IP-40 HOUSING DESIGN AND WALL MOUNTED.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KIRAN K 05MAY2017	 TE Connectivity	
DIMENSIONS: mm		CHK KIRAN K 05MAY2017		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD E STELLINGA 05MAY2017	NAME 8-PORT 1GBPS SWITCH	
		PRODUCT SPEC -	RESTRICTED TO -	
MATERIAL		APPLICATION SPEC -	SIZE A2	CAGE CODE 00779
FINISH		WEIGHT -	DRAWING NO C-2320402	SCALE NTS
		CUSTOMER DRAWING	SHEET 2 OF 2	REV A

2320402

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[TDKEZW3](#) [V23993-USB1029A](#) [100-POE4](#) [I210T1BLK](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#) [808-38157](#) [7506GX2](#) [TC](#)
[EXTENDER 2001](#) [ETH-2S](#) [105FX-SC-MDR](#) [110FX2-SC](#) [7000-P3201-P050150](#) [750-1515](#) [750-494](#) [750-495](#) [750-497](#) [750-501](#) [750-612](#)
[750-613](#) [750-627](#) [750-643](#) [750-940](#) [753-440](#) [753-540](#) [753-650/003-000](#) [852-1322](#) [852-1328](#) [852-1812](#) [852-1813](#) [852-1816](#) [LANTICK PE-](#)
[0-16](#) [LANTICK PE-16-0](#) [RBMTXLITE-L4X2.X.X.X.X.](#) [USR-TCP232-T2](#) [2017008](#) [EKI-7708E-4F-AE](#) [EKI-7708E-4FP-AE](#) [EKI-7708G-](#)
[4FP-AE](#) [2352903-2](#) [753-620](#) [EGU-0702-SFP-T](#) [EKI-2706G-1GFPI-BE](#) [SW-125](#) [SW-525](#) [SW-725](#) [7000-74712-4780030](#) [7000-74712-](#)
[4780060](#) [7000-74712-4780100](#) [7000-74712-4780150](#)