

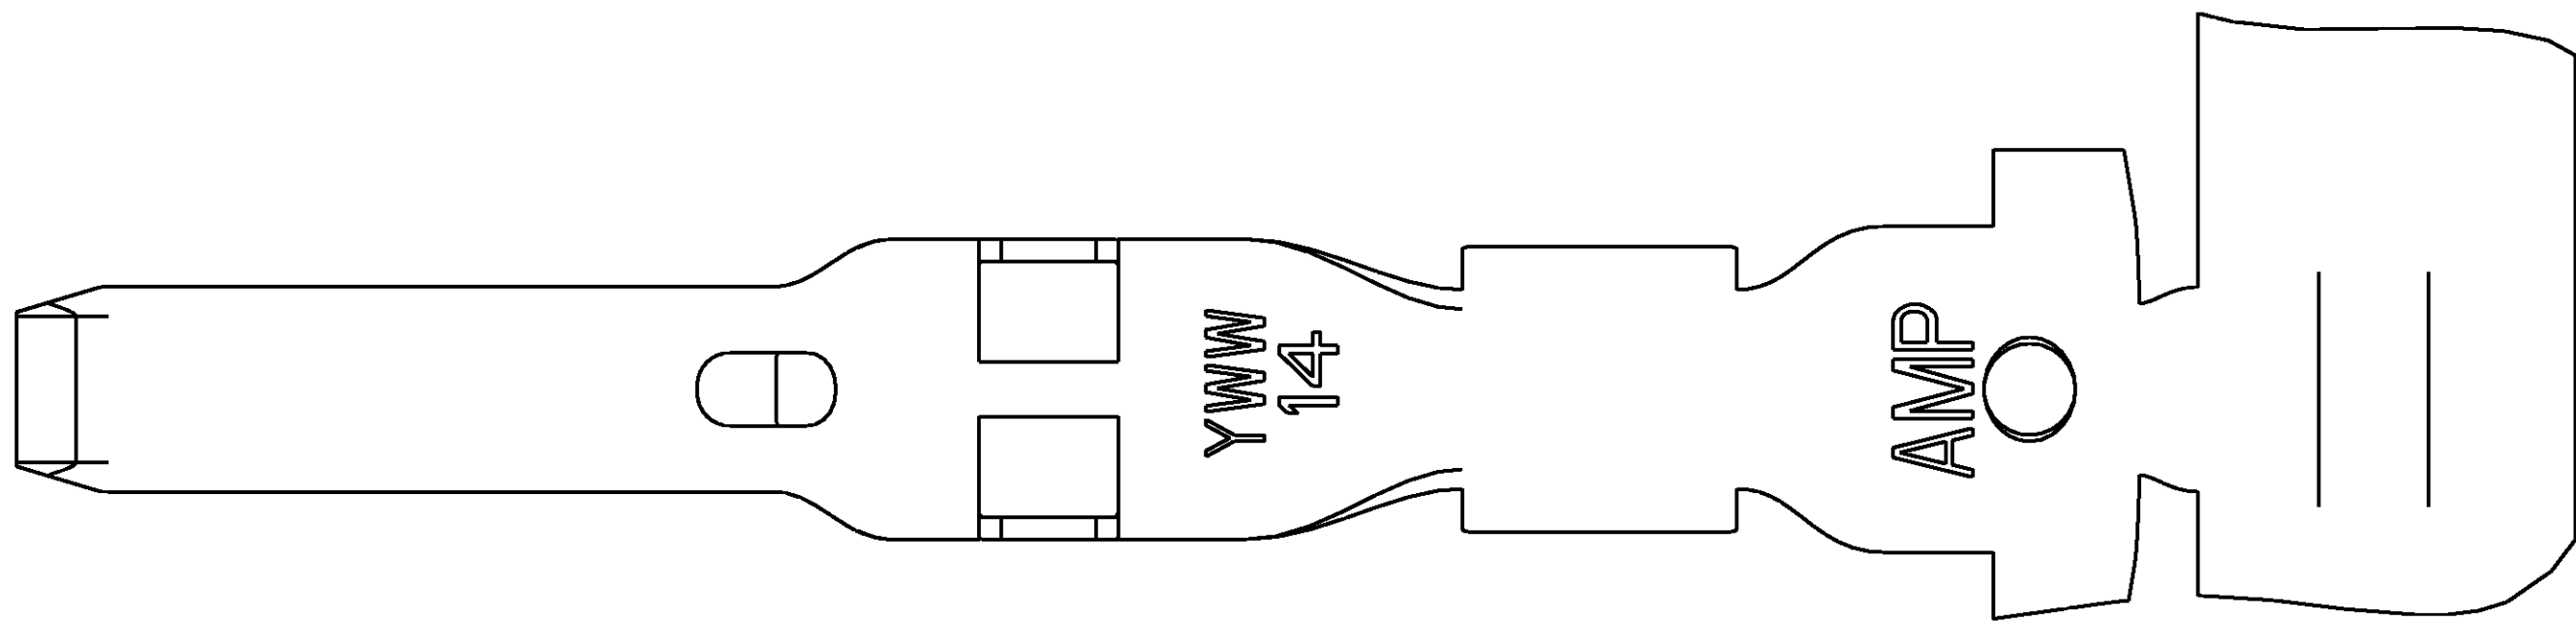


DETAIL A
SCALE 20:1

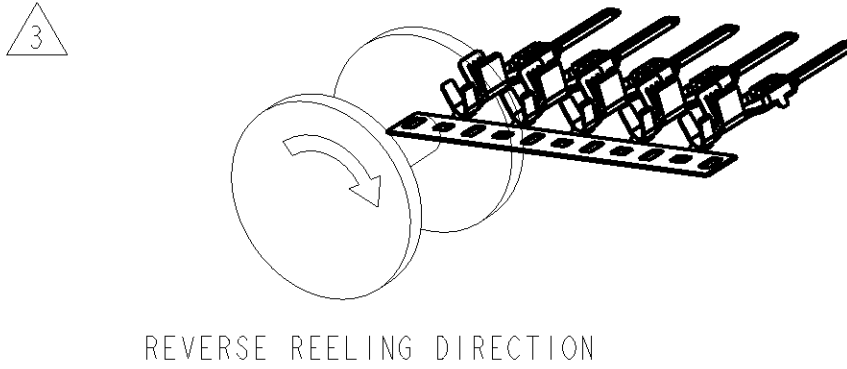



| LOC | | DIST | | REVISIONS | | | | | | |
|-----|--|------|--|-----------|-----|-----------------------------|-----------|-----|------|--|
| GE | | 00 | | REV | LYR | DESCRIPTION | DATE | DWN | APVD | |
| | | | | D | | REVISED PER EC OK40-0405-02 | 17APR2002 | AH | TW | |
| | | | | D1 | | REVISED PER EC OK40-0248-03 | 02SEP2003 | AH | TW | |
| | | | | E | | REVISED PER OK40-0074-04 | 23MAR2004 | AG | TW | |
| | | | | F | | REVISED PER ECR 05-003800 | 17NOV2005 | DLD | JLT | |

1 MATERIAL: 0.30 THICK COPPER ALLOY, PREPLATED WITH 0.0008 MINIMUM THICK MATTE TIN (ELV COMPLIANT).

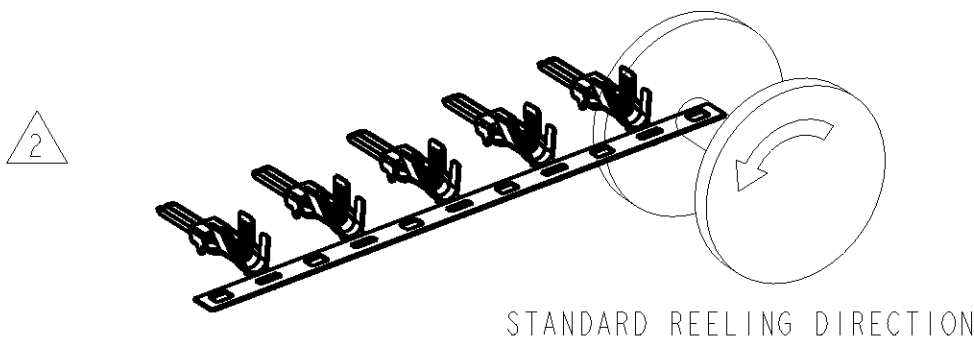




4. QUALIFICATION OF THE CRIMP APPLICATION TOOLING SHALL BE CONTROLLED BY THE REQUIREMENTS ESTABLISHED UNDER USCAR 21.

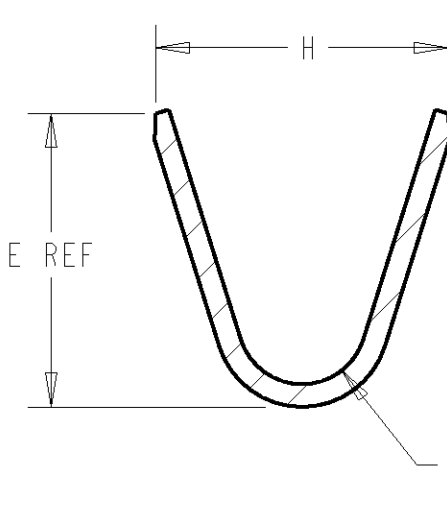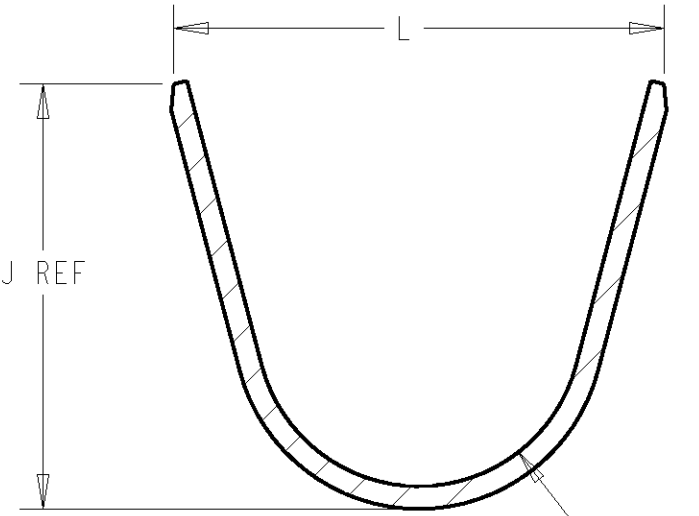5. LOOSE END SPLICING TO BE USED.



| | | | | | | | | | |
|---------|--|-----|------|------|-----|------|------|-----------|-------------|
| 3 | 1-1326031-1 REELED FOR AMP APPLICATORS | | | | | | | 12 AWG | 1-1326031-2 |
| 2 | 1.35 | 6.8 | 4.30 | 5.89 | 4.7 | 2.7 | 5.25 | 12 AWG | 1-1326031-1 |
| 3 | 1326031-5 REELED FOR AMP APPLICATORS | | | | | | | 14 AWG | 1-1326031-1 |
| | 1326031-4 REELED FOR AMP APPLICATORS | | | | | | | 16 AWG | 1326031-9 |
| | 1326031-3 REELED FOR AMP APPLICATORS | | | | | | | 18 AWG | 1326031-8 |
| | 1326031-2 REELED FOR AMP APPLICATORS | | | | | | | 20 AWG | 1326031-7 |
| | 1326031-1 REELED FOR AMP APPLICATORS | | | | | | | 22 AWG | 1326031-6 |
| 2 | 1.35 | 6.5 | 4.30 | 5.62 | 3.9 | 1.70 | 3.88 | 14 AWG | 1326031-5 |
| | 1.10 | 5.6 | 3.80 | 4.54 | 3.9 | 1.70 | 3.88 | 16 AWG | 1326031-4 |
| | 1.10 | 5.6 | 3.80 | 4.54 | 3.3 | 1.30 | 2.76 | 18 AWG | 1326031-3 |
| | 0.90 | 5.0 | 3.40 | 4.11 | 3.3 | 1.30 | 2.76 | 20 AWG | 1326031-2 |
| | 0.90 | 5.0 | 3.40 | 4.11 | 2.5 | 0.90 | 2.11 | 22 AWG | 1326031-1 |
| REELING | N | L | ØK | J | H | ØF | E | WIRE SIZE | PART NO. |

| | | | | | | | | | |
|--|--|---|--|----------------------------------|--|---------------------|--|---|--|
| THIS DRAWING IS UNPUBLISHED. IT IS SUBJECT TO CHANGE AND THE CUSTOMER SHALL BE RESPONSIBLE FOR VERIFYING THE DIMENSIONS OF THE PARTS BEFORE USE. IF IT IS SUBJECT TO CHANGE, THE CUSTOMER SHALL BE RESPONSIBLE FOR VERIFYING THE DIMENSIONS OF THE PARTS BEFORE USE. | | | | DWN D. STRAUSSER 28APR99 | | AMP | | Tyco Electronics Harrisburg, PA 17105-3608 | |
| DIMENSIONS: | | TOLERANCES UNLESS OTHERWISE SPECIFIED: | | D. BROWN 28APR99 | | NAME | | | |
| mm | | 0 PLC ±.3 1 PLC ±0.10 2 PLC ±.10 3 PLC ±.10 4 PLC ±.10 | | APRD D. BROWN 28APR99 | | 2.8mm BLADE, SEALED | | | |
|  | | | | PRODUCT SPEC SAE/USCAR-2 8/97 | | | | | |
| | | | | APPLICATION SPEC 114-13013 | | SIZE | | CAGE CODE | |
| MATERIAL | | FINISH | | WEIGHT | | A1 | | 00779 | |
|  | |  | | - | | C=1326031 | | - | |
| CUSTOMER DRAWING | | | | SCALE | | 10:1 | | SHEET | |
| | | | | | | | | OF | |
| | | | | | | | | REV | |
| | | | | | | | | F | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Connectors](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[003-018-000](#) [60403001](#) [60993906-B](#) [M902-2131](#) [M902-2161](#) [72.330.1035.1](#) [73.353.4028.0](#) [F119300-B](#) [F166900](#) [F258300-B](#) [F358300-B](#)
[F407400](#) [F444110](#) [F487000](#) [F509500B-B](#) [827153-1](#) [8N1515-32-24P](#) [9-1326729-8](#) [925474-1](#) [928905-1](#) [964562-4](#) [968782-1](#) [GT17SA-8DS-](#)
[HU](#) [98891-1012](#) [98947-1016](#) [12004147](#) [12004475-L](#) [12010290](#) [12010309-B](#) [12015454](#) [12020219-B](#) [12020308](#) [12041318-B](#) [12052225-L](#)
[12052466](#) [12059125](#) [12064869](#) [12004327-B](#) [12010503-B](#) [12015308](#) [12015384](#) [12015909](#) [1-21030-1](#) [12041254](#) [12041318](#) [12047946-B](#)
[12047957](#) [12047957-L](#) [12059473](#) [12066261](#)